



Mangalore SEZ Limited

3rd Floor, MUDA Building, Ashoknagar,

Urwa Stores, Mangalore - 575 006

Phone: 0824-2452748 / 2452760

Fax: 0824-2452749

Website: www.mangaloresez.com

CIN: U45209KA2006PLC038590

30/12/2017

To,

The Director,
Southern Region, Regional Office,
Ministry of Environment and Forests,
Kendriya Sadan, 4th Floor, E&F Wings,
17th Main Road, 1st Block, Koramangala,
Bangalore – 560 034

Dear Sir,

Sub: Submission of Six monthly Compliance Report

With reference to above subject, we hereby submit the six monthly Compliance reports of Mangalore SEZ & OMPL for the months up to November 2017.

Thanking You,

Regards

Sr. General Manager
Civil & Environment
Mangalore SEZ.

REGIONAL OFFICE
Karnataka State Pollution Control Board
Plot No. 10 - B, Balkampady Industrial Area
MANGALORE - 575 011

Encl: Compliance Report

Copy: Karnataka State Pollution Control Board, Mangalore



Mangalore SEZ Limited

3rd Floor, MUDA Building, Ashok nagar,

Urwa Stores, Mangalore - 575 006

Phone: 0824-2452748 / 2452750

Fax: 0824-2452749

Website: www.mangaloresez.com

CIN: U45209KA2006PLC038590

30 Dec, 2017

MSEZL/MNG/EN/2016-17

To,

The Director,
Southern Region, Regional Office,
Ministry of Environment and Forests,
Kendriya Sadan, 4th Floor, E&F Wings,
17th Main Road, 1st Block, Koramangala,
Bangalore – 560 034

Sir,

Sub: Six monthly Compliance Report.

Ref:

1. Environmental Clearance No: 21-383/2007-IA-III, dated 3rd April 2008.
2. Amendment to Environmental Clearance for setting up of Phase-I of Special Economic Zone at Mangalore by M/s Mangalore SEZ Ltd – regarding No: 2L-383/2007-IA-III dated 13th July, 2012.
3. Amendment to Environmental Clearance for setting up of Phase-I of Special Economic Zone at Mangalore by M/s Mangalore SEZ Ltd date 27 Aug 2014.
4. Amendment to Environmental Clearance for development of Multi Product Units as Mangalore SEZ dated 18 June 2015.

With reference to above, we would like to submit the compliance report as on date.

REGIONAL OFFICE
Karnataka State Pollution Control Board
Post No. 10 - B, Baikampady Industrial Area
MANGALORE - 574 011
RS/118

| S. No. | A. SPECIFIC CONDITIONS | Compliance |
|--------|--|---|
| (i) | No Objection Certificate from the Karnataka State Pollution Control Board shall be obtained before initiating the project. | Consent For Establishment from KSPCB obtained on 30 April 2008 and Extension of validity of Consent For Establishment obtained on 27 May 2013 and the copy was submitted to MoEF. |
| (ii) | The MSEZ project shall be restricted to the Phase-I of the project, proposed over 1,800 acres. The phase II of the project shall be considered by Ministry of Environment and Forests only after receipt of all requisite documents/information as laid down in the Environmental Impact Assessment Notification, 2006 and Coastal Regulation Zone Notification, 1991 as applicable. | Will be complied. MSEZL will approach MoEF with requisite documents as per EIA Notification, 2006 for Phase-2 expansions if taken in future. |
| (iii) | All development in the Coastal Regulation Zone area shall be in accordance with the Coastal Regulation Zone Notification, 1991. No destruction of mangroves shall be | Noted & will be complied. |

[Signature]



Mangalore SEZ Limited

3rd Floor, MUDA Building, Ashok nagar,
Urwa Stores, Mangalore - 575 006
Phone: 0824-2452748 / 2452750
Fax: 0824-2452749
Website: www.mangaloresez.com
CIN: U45209KA2006PLC038590

| | | |
|--------|--|--|
| (iii) | All required sanitary and hygienic measures should be in place before starting construction activities and to be maintained throughout the construction phase. Sufficient number of toilets/bathrooms should be provided with required septic tanks and soak pits for construction work force. | Complied. |
| (iv) | A First Aid Room should be provided in the project both during construction and operation of the project. | A Doctor, clinic and Medical shop is established at 48 acres R&R colony to look after the Project Rehabilitated People. MSEZL has taken up with GoK for setting up Primary Health centre and agreed to provide land for the setting up the same. |
| (v) | Adequate drinking water and sanitary facilities should be provided for construction workers at the site. The safe disposal of waste water and solid wastes generated during the construction phase should be ensured. | Works are completed. |
| (vi) | Provision should be made for the supply of fuel (kerosene or cooking gas) utensils such as pressure cookers etc, to the labourers during the construction phase. | Works are completed. |
| (vii) | All the labourers to be engaged for construction should be screened for health and adequately treated before engaging them to work at the site and detailed report submitted to SEIAA. Safety standards as per National Building Code (NBC) should be ensured. | Works are completed. |
| (viii) | For disinfection of waste water meant for uses other than toilet flushing, use ultra violet radiation and not chlorination. For recirculation of treated waste water for toilet flushing, use chlorination. | Works are completed. |
| (ix) | All the top soil excavated during construction activities should be stored for use in horticulture/Landscape development within the Project site. | Works are completed. |
| (x) | Disposal of construction waste during construction phase should not create any adverse effect on the neighbouring communities and be disposed taking the necessary precautions for general safety and health aspects of people, only in approved sites with the approval of competent authority. | Works are completed. |
| (xi) | Soil and ground water samples should be tested at the project site during the construction phase to ascertain that there is no threat to ground water quality by leaching of heavy metals and or other toxic contaminants and report submitted to SEIAA. | The project is for development of R&R Colony and the scope of works is to develop the graded sites to Project displaced families with water and sanitation facilities. There are no chances of heavy metals or toxic |



Mangalore SEZ Limited

3rd Floor, MUDA Building, Ashok nagar,

Urwa Stores, Mangalore - 575 006

Phone: 0824-2452748 / 2452750

Fax: 0824-2452749

Website: www.mangaloresez.com

CIN: U45209KA2006PLC038590

| | | |
|---------|---|--|
| | | contaminants produced from the activity. However MSEZL has carried out the portability test for water & report has been forwarded. |
| (xii) | Construction spoils, including bituminous material and other hazardous materials, must not be allowed to contaminate water courses and the dumpsites for such material must be secured, so that they should not leach into the ground water. | Noted. The project is development of R&R Colony and the scope of works is to develop the graded sites to Project displaced families with water and sanitation facilities. There are no chances of construction spoils or Hazardous materials produced from the activity. |
| (xiii) | The diesel generator sets to be used during construction phase should be of low sulphur diesel type and should conform to Environment (Protection) Rules prescribed for air and noise emission standards. | Noted. No Diesel generators were used during the construction works. |
| (xiv) | Vehicles hired for bringing construction material to the site should be in good condition and should conform to applicable air and noise emission standards and should be operated only during non-peak hours. | Works are completed. |
| (xv) | Ambient noise levels should conform to residential standards both during day and night. Incremental pollution loads on the ambient air and noise quality should be closely monitored during construction phase. Adequate measures to reduce air and noise pollution during construction keeping in mind CPCB norms on noise limits. | Works are completed. |
| (xvi) | Fly ash should be used as building material in the construction as per the provisions of Fly Ash Notification of September 1999 and amended as on August 2003 | The Project is for development of R&R Colonies with Infrastructure like roads, water & Drainage facilities. There is no requirement of building construction and hence usage of Fly ash does not arise. However in future if MSEZL takes up any building the same will be complied. |
| (xvii) | Ready mixed concrete must be used in building construction. | The Project is for development of R&R Colonies with Infrastructure like roads, water & Drainage facilities. There is no requirement of building construction and hence usage of Ready mixed concrete does not arise. However in future if MSEZL takes up any building the same will be complied. |
| (xviii) | Storm water control and its re-use as per CGWB and BIS standards for various applications. | Noted and will be complied. |



Mangalore SEZ Limited

3rd Floor, MUDA Building, Ashok nagar,

Urwa Stores, Mangalore - 575 006

Phone: 0824-2452748 / 2452750

Fax: 0824-2452749

Website: www.mangaloresez.com

CIN: U45209KA2006PLC038590

| | | |
|---------|---|--|
| (xix) | Water demand during construction should be reduced by use of pre-mixed concrete, curing agents and other best practices. | Complied. |
| (xx) | The Project Authorities shall not undertake either drawls of Ground water or drilling of bore wells. | Complied. |
| (xxi) | Separation of grey and black water should be done by the use of dual plumbing line for separation of grey and black water. | Noted. |
| (xxii) | Treatment of 100% grey water by decentralized treatment should be done. | 100 cum/day Skid mounted STP is erected already in 48 Acres & 35 Acres colony to treat the grey water. |
| (xxiii) | Fixtures for showers, toilet flushing and drinking should be of low flow either by use of aerators or pressure reducing devices or sensor based control. | The Project is for development of R&R Colonies with Infrastructure like roads, water & Drainage facilities. There is no requirement for usage of Showers, toilet flushing etc and the condition is not relevant to project implementation. |
| (xxiv) | Use of glass may be reduced by up to 40% of exposed area to reduce the electricity consumption and load on air conditioning. If necessary, use high quality double glass with special reflective coating in windows. | The Project is for development of R&R Colonies with Infrastructure like roads, water & Drainage facilities. There is no requirement for usage of glass etc and the condition is not relevant to project implementation. |
| (xxv) | Roof should meet prescriptive requirement as per Energy Conservation Building Code by using appropriate thermal insulation material. | The Project is for development of R&R Colonies with Infrastructure like roads, water & Drainage facilities. There is no requirement for construction of Building roof etc and the condition is not relevant to project implementation. |
| (xxvi) | Opaque wall should meet prescriptive requirement as per Energy Conservation Building Code which is proposed to be mandatory for all air conditioned spaces while it is optional for non-air conditioned spaces by use of appropriate thermal insulation material to fulfil the requirement. | The Project is for development of R&R Colonies with Infrastructure like roads, water & Drainage facilities. There is no requirement for construction of Building wall or air conditioned spaces etc and the condition is not relevant to project implementation. |

II. OPERATION PHASE

| | | |
|-----|---|---|
| (i) | The installation of the Sewage Treatment Plant (STP) of | It was informed to the Assessment Authority |
|-----|---|---|



Mangalore SEZ Limited

3rd Floor, MUDA Building, Ashok nagar,
Urwa Stores, Mangalore - 575 006
Phone: 0824-2452748 / 2452750
Fax: 0824-2452749
Website: www.mangaloresez.com
CIN: U45209KA2006PLC038590

| | | |
|-------|--|--|
| | 16.5 MLD capacity should be carried out before the construction of the second floor of the main structures is commenced and the plant shall be got certified by an independent expert and a report in this regard should be submitted to the SEIAA immediately. Discharge of treated sewage shall conform to the norms & standards of the Karnataka State Pollution Control Board. Treated sewage should be used for flushing, gardening, etc. as proposed. | by vide our letter dated 22 nd July 2008, that MSEZL has not proposed installation of 16.5 MLD STP, but however the sewage generated in the proposed Colonies will be taken to the proposed 16.5 MLD STP by Mangalore City Corporation. |
| (ii) | Rainwater harvesting for roof run-off with sufficient capacity artificial pond at ground level for rainwater collection and also surface run-off harvesting should be implemented. Before recharging the surface runoff, pre-treatment must be done to remove suspended matter, oil and grease. Detailed rainwater harvesting plan should be submitted immediately. | Noted and will be complied. |
| (iii) | Ensure that the excess runoff rainwater from the green belt area, which is irrigated by treated water, does not get into infiltration pits and contaminate the ground water. Such excess flow should be safely let in to the storm water drains. | Noted and will be complied. |
| (iv) | The solid waste generated should be properly collected and segregated before disposal to the City Municipality Facility. | Noted and will be complied. |
| (v) | Any hazardous waste including biomedical waste should be disposed of as per applicable Rules and norms with necessary approvals of the Karnataka State Pollution Control Board. | Noted and will be complied. |
| (vi) | As agreed to by the project proponent, develop minimum 13% of the project area i.e., minimum 50 acres area for green belt and plant with tree species at an espacement of 3mts x 3mts i.e. 1,111 plants/hectare. The balance 20% shall be made up by taking up tree planting on the road sides in the project and if required outside the project so as to ensure that 33% of the project area covered under green belt. The green belt design along the Periphery of the plot shall achieve attenuation factor conforming to the day and night noise standards prescribed for residential land use. The open spaces inside the plot should be suitably landscaped and covered with vegetation of indigenous variety. | The green belt development is already taken up in Phase I (48 Acres) colony. Around 3000 trees are planted in an extent of 6.6 acres and 600 trees are planted in Bajpe R&R Colony and 8500 tree samplings are planted in other R&R colonies. The balance tree plantation in 22.5 Acres land will be taken in the year of 2018-19. Slope stabilization by vetiver grass taken up in 3 Acre area to check soil erosion. |
| (vii) | Incremental pollution loads on the ambient air quality; | Noted and will be complied. |





Mangalore SEZ Limited

3rd Floor, MUDA Building, Ashok nagar,

Urwa Stores, Mangalore - 575 006

Phone: 0824-2452748 / 2452750

Fax: 0824-2452749

Website: www.mangaloresez.com

CIN: U45209KA2006PLC038590

| | | |
|--------|--|--|
| | noise and water quality should be periodically monitored after commissioning of the project. | |
| (viii) | Application of Solar energy should be incorporated for illumination of common areas, lighting for gardens and street lighting in addition to provision for solar water heating. A hybrid system or fully solar system for the complex should be provided. Details in this regard should be submitted to the SEIAA. | The Project is for development of R&R Colonies with Infrastructure like roads, water & Drainage facilities. There is no requirement for solar water heating or lighting for gardens and the condition is not relevant to project implementation. The colony will be handed over to Mangalore City Corporation after development & O&M tenure issued. Hence the street lighting with MESCOM connections are provided. |
| (ix) | Traffic congestion near the entry and exit points from the roads adjoining the proposed project site must be avoided. Parking must be fully internalized and no public space should be utilized. | Noted and will be complied. |
| (x) | A Report on the energy conservation measures confirming to energy conservation norms finalized by Bureau of Energy Efficiency should be prepared incorporating details about building materials & technology, R&U Factors etc and submit to the SEIAA in three months time. | The Project is for development of R&R Colonies with Infrastructure like roads, water & Drainage facilities. There is no requirement for energy consumption equipments or Building appliances and the condition is not relevant to project implementation. |

B. GENERAL CONDITIONS

| | | |
|-------|--|--|
| (i) | The Environmental safeguards contained in the EIA Report should be implemented in letter and spirit. | Noted and will be complied. |
| (ii) | All commitments made by the proponents in their application, and subsequent letters addressed to the SEAC/SEIAA should be accomplished before the construction work of the project is completed. | Noted and will be complied. |
| (iii) | Six monthly monitoring reports should be submitted to the SEIAA and the Regional Office, MoEF, Bangalore, failing which action may be taken to cancel the Environmental Clearance certificate issued. | Noted and will be complied. |
| (iv) | Officials from the Department of Ecology and Environment, Bangalore/Regional Office of MoEF, Bangalore/Regional Director (Environment) Dept. of Ecology and Environment, Mangalore/ Regional Officer, KSPCB Mangalore and KSPCB Bangalore who would be monitoring the implementation of Environmental safe guards should be given full | The complete sets of documents submitted to MoEF/SEIAA were forwarded as directed in the Conditions. MSEZL will comply in providing the full cooperation to the Monitoring officers. |



Mangalore SEZ Limited

3rd Floor, MUDA Building, Ashok nagar,

Urwa Stores, Mangalore - 575 006

Phone: 0824-2452748 / 2452750

Fax: 0824-2452749

Website: www.mangaloresez.com

CIN: U45209KA2006PLC038590

| | | |
|--------|--|---|
| | cooperation, facilities and documents/data by the project proponents during their inspection. A complete set of all the documents submitted to MoEF/SEIAA should be forwarded to the CCF, Regional Office of MoEF, Bangalore/Department of Ecology and Environment, Bangalore /Regional Director, (Environment) Department of Ecology and Environment, Mangalore/Regional Officer, KSPCB Mangalore and KSPCB Bangalore. | |
| (v) | In the case of any change(s) in the scope of project, the project would require a fresh appraisal by this Authority. | Noted. |
| (vi) | The Authority reserves the right to add additional safeguard measures subsequently, if found necessary, and to take action including revoking of the environment clearance under the provisions of the Environment (Protection) Act, 1986, to ensure effective implementation of the suggested safeguard measures in a time bound and satisfactory manner. | Noted. |
| (vii) | All other statutory clearances such as the approvals for storage of diesel from Chief Controller of Explosives, Fire Department, Civil Aviation Department, Forest Conservation Act 1980 and Wildlife (Protection) Act, 1972 etc shall be obtained, as applicable by project proponents from the competent authorities. | Noted. |
| (viii) | The project proponent should advertise in at least two local Newspapers widely circulated in the region, one of which shall be in vernacular language informing that the project has been accorded environmental clearance and copies of clearance letters are available with the Karnataka State pollution Control board and may also be seen on the website of the Ecology and Environment Department at http://seiaa.kar.nic.in . The advertisement should be made within 7 days from the day of issue of the clearance letter and a copy of the same should be forwarded to the Regional Office of MoEF at Bangalore/Department of Environment and Ecology, Bangalore. | Noted. The advertisement was made in three local News papers and the copy of the same was forwarded to all concerned as directed. |
| (ix) | These stipulations would be enforced among others under the provisions of water (Prevention and Control of Pollution) Act, 1974, The Air (Prevention and Control of Pollution) act 1981, the Environment (Protection) Act, 1986, the Public Liability (Insurance) Act, 1991 and EIA Notification,2006. | Noted. |





Mangalore SEZ Limited

3rd Floor, MUDA Building, Ashok nagar,

Urwa Stores, Mangalore - 575 006

Phone: 0824-2452748 / 2452750

Fax: 0824-2452749

Website: www.mangaloresez.com

CIN: U45209KA2006PLC038590

| | | |
|-----|--|--------|
| (x) | Under the provisions of Environment (Protection) Act, 1986, legal action shall be initiated against the project proponent if it was found that construction of the project has been started without obtaining environmental clearance. | Noted. |
|-----|--|--------|

The R&R Package is being implemented strictly as per Approved policy by State Government. In 1st PDF 1233 families out of 1253, In 2nd PDF 214 families out of 214, In 3rd PDF 141 families out of 147 families & 14 shops has been compensated with R&R Packages. Totally 1602 families have vacated their houses and the process is in progress for the balance.

10 nos. R&R colonies developed - 1415 sites allotted to eligible Project Displaced Families so far and balance 30 is in the process. 359 nominees of the displaced people given training at Karnataka Polytechnic (KPT) for diploma equivalent programs in Chemical, Mechanical & Electrical disciplines and 341 nominees have already been employed. 1628 nominees would have been eligible for employment out of which 867 nominees have opted for "one time" compensation in lieu of job and balance 761 nominees opted for the jobs. 589 nos. PDF nominees have already got employment out of 761 nos. empanelled.

With Regards

Sr. General Manager

Civil & Environment

Mangalore SEZ Ltd.

Copy to: 1) Environmental Officer, Karnataka State Pollution Control Board, Mangalore.



MSEZL/MNG/EN/2016-17

Mangalore SEZ Limited

3rd Floor, MUDA Building, Ashok Nagar,

Urwa Stores, Mangalore - 575 006

Phone: 0824-2452748 / 2452750

Fax: 0824-2452749

Website: www.mangaloresez.com

CIN: U45209KA2006PLC038590

30, Dec 2017

To,

The Director,
Southern Region, Regional Office,
Ministry of Environment and Forests,
Kendriya Sadan, 4th Floor, E&F Wings,
17th Main Road, Ist Block, Koramangala,
Bangalore – 560 034

Sir, .

Sub: Development of Residential Colony for Rehabilitation and Resettlement for SEZ Complex at Kulai & Thokur village, Mangalore Taluk & District by M/s Mangalore SEZ Limited, Mangalore.

Ref: 1) Environmental Clearance No: SEIAA: 140: CON: 2008, dated 25th June 2008.

With reference to above, we would like to submit the compliance report as on date

REGIONAL OFFICE

Karnataka State Pollution Control Board
Plot No. 10 - B, Baikampady Industrial Area
MANGALORE - 575 011

A. SPECIFIC CONDITIONS

I. CONSTRUCTION PHASE

| | | |
|------|---|--|
| (i) | Setup an Environment Management cell and ensure that the cell manages/maintains all the environmental aspects such as sewage treatment, solid waste disposal, maintenance of green belt areas etc, and in case the commercial space is sold/leased, then enter into agreement as per the draft agreement copy submitted, with the prospective buyers to ensure that they maintain the cell and take care of all environment concerns during the operation phase of the project. In addition sufficient fees should be levied so as to raise a corpus fund to maintain the Environment Cell. | MSEZL Environment Management cell is established to look after the environmental aspects like sewage treatment, Solid waste disposal & Development and maintenance of Green belt etc. The conditions specified regarding selling or leasing of Commercial space will be complied. |
| (ii) | Appoint an Environment and Safety Engineer during the construction phase to take care of environment and safety aspects as committed. | Yes. Environmental Engineer and Sr. General Manager (Environment & Civil) are in place to take care of Environmental issues and Safety aspects. Horticulture Sr. Manager has appointed for development and maintenance of Green belt. |



Mangalore SEZ Limited

3rd Floor, MUDA Building, Ashok nagar,

Urwa Stores, Mangalore - 575 006

Phone: 0824-2452748 / 2452750

Fax: 0824-2452749

Website: www.mangaloresez.com

CIN: U45209KA2006PLC038590

| S. No. | A. SPECIFIC CONDITIONS | Compliance |
|--------|--|---|
| | undertaken except while undertaking the permissible activities in the Coastal Regulation Zone-I areas. | |
| (iv) | The project proponent shall not take up any activity in 875 acres of Coastal Regulation Zone land, other than those permissible under the Coastal Regulation Zone Notification 1991 such as pipeline corridors, pipelines roads on stilts. | Noted & will be complied. |
| (v) | <p>With regard to the containing the suspected contamination of the groundwater near Athurkodi area of Kuthethoor village, MRPL have given an undertaking vide their letter dated 19.3.2008 which is as follows:-</p> <ul style="list-style-type: none">a) Implementation of recommendation of NGPRI will be started by MRPL immediately after submission of their report.b) Depending upon the nature of their recommendations, we will make efforts to complete necessary actions within 6 months from the date of receipt of their report.c) In addition to above, a daily vigil is already in place to take samples from different places and to monitor any suspected oil leakage. This will continue till the problem is resolved.d) We are also in continuous contact with the residents in the surround areas with regard to any contamination. <p>KSPCB and MRPL shall ensure that (a) to (d) above is implemented in a time bound manner and a monthly report on the progress of the activities provided to the Regional Office of this Ministry at Bangalore. For this purpose a separate budget would be allocated by MRPL.</p> | <p>This condition pertains to MRPL phase III expansion project.</p> <p>MRPL phase III expansion has been detached from MSEZ phase I project vide EC amendment dated 13th July 2012. MRPL shall be complying conditions relevant to them as part of their existing clearance.</p> |
| (vi) | The project proponent shall obtain a report from the Wildlife Department with regard to existence of wildlife in the proposed site as claimed by the public before implementing the project. | Report from the Forest Department is obtained and submitted to the MoEF dated June 5, 2008. |
| (vii) | The R&R package shall be strictly in accordance with the laid down norms of the State Government. | The R&R Package is being implemented strictly as per approved policy by State Government. In 1 st PDF 1233 families out of 1253, In 2 nd PDF 214 families out of 214, In 3 rd PDF 141 families out of 147 families & 14 shops has been compensated with R&R Packages. Totally 1602 families have vacated their houses and are rehabilitated. |



Mangalore SEZ Limited

3rd Floor, MUDA Building, Ashok nagar,

Urwa Stores, Mangalore - 575 006

Phone: 0824-2452748 / 2452750

Fax: 0824-2452749

Website: www.mangaloresez.com

CIN: U45209KA2006PLC038590

| S. No. | A. SPECIFIC CONDITIONS | Compliance |
|--------|---|--|
| (viii) | A marine Environment Impact Assessment and Risk Assessment along with the Disaster Management Plan shall be prepared for the outfall facilities proposed in the Coastal Regulation Zone and the marine areas. | NIO has carried out EIA, Risk Assessment, DMP and Bathymetry survey along with Marine Outfall pipeline alignment. The detailed design report of the Marine Outfall facility is prepared by Master planning consultants of MSEZ under the guidance of Department of Oceanography, IIT Chennai. The design report was also vetted by NIO, Goa. The detailed project report of the facility is submitted to MoEF during November 2009. MSEZ has taken up the implementation of the above facility and completed the work by July 2014. MSEZ obtained consent for operation of treated waste water discharge line from KSPCB dated 9 Sep 2014, 8 Oct 2015 & 27 Aug 2016. |
| (ix) | Project proponent shall put up a dedicated website and a display panel to inform the public regarding the Ambient Air Quality along with SO ₂ NOx and other parameters as prescribed as Central Pollution Control Board (CPCB). | MSEZL has dedicated website 'www.msezl.com', wherein Environment Monitoring Parameters are periodically uploaded and made available to the public. Installation and commissioning of Continuous Ambient Air Quality Monitoring station has completed during the month July 2017 and presently data transfer to CPCB server is under progress. The locations of monitoring station are finalized in consultation with KSPCB. |
| (x) | The gaseous emissions (SO ₂ , NOx, HC, VOC and Benzene) from various process units shall conform to the standards prescribed by the concerned State Pollution Control Board. All the measures detailed in the EMP and response to the Public Hearing shall be taken to control the point/stack and fugitive gaseous emissions from the proposed facilities, processes and storage units etc., for ensuring that the ambient air quality around the Refinery due to the expansion is maintained at the predicted 24 hourly average maximum concentration. | Noted. The existing units in MSEZ are complying the conditions and sending reports to KSPCB directly. MRPL phase III expansion has been detached from MSEZ phase I project vide EC amendment dated 13 th July 2012. MRPL shall be complying conditions relevant to them as part of their existing clearance. |
| (xi) | The emission levels of the other pollutants shall also remain within the permissible levels | Noted. |
| (xii) | The industrial units in the SEZ and the associated facilities shall be strictly in accordance with the norms laid down by the Karnataka State Government and CPCB. | Noted and will be adhered. |



Mangalore SEZ Limited

3rd Floor, MUDA Building, Ashok nagar,

Urwa Stores, Mangalore - 575 006

Phone: 0824-2452748 / 2452750

Fax: 0824-2452749

Website: www.mangaloresez.com

CIN: U45209KA2006PLC038590

| S. No. | A. SPECIFIC CONDITIONS | Compliance |
|---------|---|--|
| (xiii) | The project proponent shall ensure that the greenery of the area is maintained. Further, 33% of the project area shall be dedicated for green belt development of which at least 5% shall be for mangrove afforestation. The local Forest Department shall be associated for this purpose and requisite budget earmarked. | MSEZL has completed Green Belt development in 207 acres by planting 93150 saplings out of 272 acres till year 2016. During the year 2017-18, 30acres has been taken for green belt development by planting 11830 saplings and remaining will be completed in the year 2018-19. Green Belt operation & maintenance is for 2-3 years & plants are maintained as per the good practises to ensure 100% survival. Slope stabilisation in about 18 acres with vetiver grass has been completed. |
| (xiv) | The project proponent shall ensure that the water requirement of the Mangalore city does not get affected due to the SEZ operation. Adequate provision shall be made in the reservoirs to provide for the water requirement of the cities. | Noted. |
| (xv) | The project proponent shall ensure that during construction and operation of the project the traffic in the city is not affected. | Noted and will be Complied. |
| (xvi) | All precautions of the highest standards shall be incorporated in the design of the project to ensure that there is no chance of emission/leakage of hazardous chemicals including Benzene. Detailed monitoring programme shall be designed and the information provided to the public through display and dedicated website by means of online monitoring. | Noted and will be complied. |
| (xvii) | Low Sulphur internal fuel oil and fuel gas shall be fired in process heaters and boilers. | Noted and will be complied. |
| (xviii) | Quarterly monitoring of fugitive emissions shall be carried out by Fugitive Emission Detectors (GMI Leak Surveyor). Guidelines of CPCB will be followed for monitoring fugitive emissions. For control of fugitive emissions, all unsaturated hydrocarbons shall be routed to the flare system. The flare system shall be designed for smokeless burning. Flare Gas Recovery System shall be installed for reduction of Hydrocarbon loss and emission of VOCs, NOx, N ₂ O, SOx & CO ₂ to the environment. | Noted and will be complied. |
| (xix) | Regular Ambient Air Quality Monitoring shall be carried out. The location and results of existing monitoring stations shall be reviewed in consultation with the concerned State Pollution Control Board based on the | Ambient Air Quality Monitoring is being carried out regularly in five locations and the locations of monitoring are selected in consultation with KSPCB. The reports of |



Mangalore SEZ Limited

3rd Floor, MUDA Building, Ashok nagar,

Urwa Stores, Mangalore - 575 006

Phone: 0824-2452748 / 2452750

Fax: 0824-2452749

Website: www.mangaloresez.com

CIN: U45209KA2006PLC038590

| S. No. | A. SPECIFIC CONDITIONS | Compliance |
|---------|---|--|
| | occurrence of maximum ground level concentration and downwind direction of wind. Additional Stations shall be set up, if required. It shall be ensured that at least one monitoring station is set up in up-wind & in down-wind direction along with those in other directions. | monitored data attached as Annexure-I . |
| (xx) | On-line data for air emissions shall be transferred to the CPCB and SPCB regularly. The instruments used for ambient air quality monitoring shall be calibrated regularly. The monitoring protocol shall ensure continuous monitoring of all the parameters. | Installation and commissioning of Continuous Ambient Air Quality Monitoring Station has completed during the month July 2017 and data transfer to CPCB server is under progress. The locations of monitoring station are finalized in consultation with KSPCB. |
| (xxi) | The practice of acoustic plant design shall be adopted to limit noise exposure for personnel to an 8 hr time weighted average of 90 dB (A). | Noted and will be complied. |
| (xxii) | All the pumps and other equipment's, where there is a likelihood of HC leakages, shall be provided with appropriate indicators and detectors. Provision for immediate isolation of such equipment, in case of a leakage shall also be made. The company shall adopt Leak Detection And Repair (LDAR) programme for quantification and control of fugitive emissions. | Noted and will be complied. |
| (xxiii) | The product loading gantry shall be connected to the product sphere in closed circuit through the vapour arm connected to the tanker. Data on fugitive emissions shall be regularly monitored and records shall be maintained | Noted and will be complied. |
| (xxiv) | The company shall ensure that no halogenated organic is sent to the flares. If any of the halogenated organic are present, then the respective streams may be incinerated, if there are no technically feasible or economically viable reduction/recovery options. Any stream containing organic carbon, other than halogenated shall be connected to proper flaring system, if not to a recovery device or an incinerator. | Noted and will be complied. |
| (xxv) | The new standards/norms that are being proposed by the CPCB for Petrochemical Plants and Refineries shall be applicable for the proposed expansion unit. The company shall conform to the process vent standards for organic chemicals including non-VOCs and all possible VOCs i.e., TOCs standards and process vent standards for top priority chemicals. Regular monitoring will be carried out for VOC and HC and On-line monitors for VOC measurements may be installed. | Noted and will be complied. |



Mangalore SEZ Limited

3rd Floor, MUDA Building, Ashok nagar,

Urwa Stores, Mangalore - 575 006

Phone: 0824-2452748 / 2452750

Fax: 0824-2452749

Website: www.mangaloresez.com

CIN: U45209KA2006PLC038590

| S. No. | A. SPECIFIC CONDITIONS | Compliance |
|----------|--|---|
| (xxvi) | Regular monitoring of relevant parameters for the underground water in the surrounding areas shall be undertaken and the results shall be submitted to the relevant States Pollution Control Board. | Regular monitoring of ground water is being carried in 10 locations & the reports are attached as Annexure-I . The locations are finalized in consultation with KSPCB. |
| (xxvii) | Solid waste generated as Pretreater and Reformer Catalysts, Sulphur guard absorbent and Alumina Balls shall be disposed off as per the authorization from the State Pollution Control Board. | Noted and will be complied. During operation stage MSEZL will dispose the solid waste as per the directions of State Pollution Control Board. |
| (xxviii) | Oily sludge shall be sent to melting pit treatment for recovery of oil. The recovered oil shall be recycled into the refinery system. The residual sludge will be stored in HDPE lined pit for disposal after treatment. The sludge shall be incinerated in the premises only. | Noted and will be complied. |
| (xxix) | The company shall strictly follow all the recommendations mentioned in the Charter on Corporate Responsibility for Environmental Protection (CREP). | Noted and will be complied. |
| (xxx) | The Company shall harvest surface as well as rainwater from the rooftops of the buildings proposed in the expansion project and storm water drains to recharge the ground water and use the same water for the various activities of the project to conserve fresh water. | Noted and will be complied. |
| (xxxi) | Occupational Health Surveillance of the workers should be done on a regular basis and records maintained as per the Factories Act. | Complied and copy is submitted. |
| (xxxii) | The Company shall implement all the recommendations made in the Environmental Impact Assessment /EMP report and risk assessment report. | MSEZL has implemented most of the recommendations of EIA/EMP report and still some of the projects of MSEZL as per EIA/EMP recommendations are under way. |
| (xxxiii) | The company will undertake all relevant measures, as indicated during the Public Hearing for improving the Socio-economic conditions of the surrounding area. | MSEZL is undertaking all relevant measures for improving the Socio-economic condition of the surrounding area as indicated during the Public Hearing. |
| (xxxiv) | With regard to R&R colony the project proponent shall obtain all requisite clearances as prescribed by the concerned agencies. | The R&R Colonies are developed after obtaining the requisite clearances from the concerned Departments like MoEF, KSPCB, Mangalore Urban Development Authority etc. |



Mangalore SEZ Limited

3rd Floor, MUDA Building, Ashok nagar,

Urwa Stores, Mangalore - 575 006

Phone: 0824-2452748 / 2452750

Fax: 0824-2452749

Website: www.mangaloresez.com

CIN: U45209KA2006PLC038590

| S. No | B. GENERAL CONDITIONS | Compliance |
|-------|---|---|
| (i) | The project authorities shall strictly adhere to the stipulations made by the concerned State Pollution Control Board (SPCB) and the State Government. | Noted and will be complied. |
| (ii) | No further expansion or modifications in the plant shall be carried out without prior approval of the Ministry of Environment and Forests. | MSEZ obtained amendment to EC 1. Dated 13 July 2012 2. 27 Aug 2014, this involves widening of existing public road towards river side adjacent to MSEZ proposed pipeline cum road Corridor in Reach-II area. 3. 18 th June 2015 for development of Multi Product Units as Mangalore SEZ. Copy of amendments is submitted. |
| (iii) | At no time, the emissions shall be allowed to go beyond the prescribed standards. In the event of failure of any pollution control system adopted by the units, the respective unit should be immediately put out of operation and should not be restarted until the desired efficiency has been achieved. | Noted and will be complied. |
| (iv) | Adequate number of influent and effluent quality monitoring stations shall be set up in consultation with the SPCB. Regular monitoring shall be carried out for relevant parameters for both surface and ground water. | The treated effluent parameters are measured through online measuring instruments installed at outlet line of Marine outfall pump house for the parameters like pH, DO, COD, TSS, and Conductivity. Further Ground water and surface water monitoring is carried out in the surrounding areas regularly & the reports are attached as Annexure-I . The locations are finalized in consultation with KSPCB. |
| (v) | Industrial wastewater shall be properly collected and treated so as to conform to the standards prescribed under GSR 422 (E) dated 19 th May 1993 and 31 st December, 1993 or as amended from time to time. The treated wastewater shall be utilized for plantation purpose. | Noted and will be complied. |
| (vi) | The overall noise levels in and around the plant area shall be limited within the prescribed standards (85dBA) by providing noise control measures including acoustic hoods, silencers, enclosures etc. on all sources of noise generation. The ambient noise levels should conform to the standards prescribed under EPA Rules, 1989 viz. 75dBA (day time) and 70dBA (night time). | Noted and will be complied. |



Mangalore SEZ Limited

3rd Floor, MUDA Building, Ashok nagar,

Urwa Stores, Mangalore - 575 006

Phone: 0824-2452748 / 2452750

Fax: 0824-2452749

Website: www.mangaloresez.com

CIN: U45209KA2006PLC038590

| S. No | B. GENERAL CONDITIONS | Compliance |
|--------|---|--|
| (vii) | The project authorities shall strictly comply with the provisions made in Manufacture, Storage and Import of Hazardous Chemicals Rules 1989 as amended in 2000 for handling of hazardous chemicals etc. Necessary approvals from Chief Controller of Explosives must be obtained before commission of the expansion project. Requisite On-site and Off-site Disaster Management Plans will be prepared and implemented. | <p>Noted and will be complied.</p> <p>MRPL phase III expansion has been detached From MSEZ phase I project vide EC amendment dated 13th July 2012. MRPL shall be complying conditions relevant to them as part of their existing clearance.</p> |
| (viii) | Authorization from the State Pollution Control Board must be obtained for collections/treatment/storage/disposal of hazardous wastes. | Noted and will be complied. |
| (ix) | The project authorities shall provide adequate funds both recurring and non-recurring to implement the conditions stipulated by the Ministry of Environment and Forests as well as the State Government along with the implementation schedule for all the conditions stipulated herein. The funds so provided shall not be diverted for any other purposes. | Noted and will be complied. |
| (x) | The stipulated conditions shall be monitored by the concerned Regional Office of this Ministry/Central Pollution Control Board/State Pollution Control Board. A six monthly compliance report and the monitored data shall be submitted to them regularly. It shall also be displayed on the Website of the Company. | Compliance report is being submitted to MoEF/KSPCB on regular basis for every six months along with Ambient Air Quality monitoring report, Noise monitoring report & Ground water monitoring report. Compliance report is also displayed in the Company website. |
| (xi) | The Project Proponent shall inform the public that the project has been accorded environmental clearance by the Ministry and copies of the clearance letter are available with the State Pollution Control Board/ Committee and may also be seen at Website of the Ministry of Environment and Forests at http://www.envfor.nic.in . This should be advertised within seven days from the date of issue of the clearance letter at least in two local newspapers that are widely circulated in the region of which one shall be in the vernacular language of the locality concerned and a copy of the same should be forwarded to the concerned Regional office of this Ministry. | The information regarding the EC has been published in the news papers and same was submitted to Ministry and KSPCB. |
| (xii) | The date of Financial Closure and final approval of the project by the concerned authorities and the date of commencing the land development work as well as the commissioning of the project shall be informed to the Ministry and its Regional Office. | MSEZL has taken up the land development & infrastructure works from April 2011. MSEZL Board has approved the Business Plan for Infrastructure Development during Aug. 2012. |



Mangalore SEZ Limited

3rd Floor, MUDA Building, Ashok nagar,

Urwa Stores, Mangalore - 575 006

Phone: 0824-2452748 / 2452750

Fax: 0824-2452749

Website: www.mangaloresez.com

CIN: U45209KA2006PLC038590

| S. No | B. GENERAL CONDITIONS | Compliance |
|--------|--|---|
| (xiii) | Proper Housekeeping and adequate occupational health programmes shall be taken up. Regular Occupational Health Surveillance Programme for the relevant diseases shall be carried out and the records shall be maintained properly for at least 30-40 years. Sufficient preventive measures shall be adopted to avoid direct exposure to emission and other Hydrocarbons etc. | Noted and will be complied. |
| (xiv) | A separate environment management cell with full fledge laboratory facilities to carry out various management and monitoring functions shall be set up under the control of a Senior Executive. | Sr. General Manager (Environment & Civil) & Environmental Engineer are in place to take care of Environmental issues. Horticulture Sr. Manager is appointed for development and maintenance of Green belt. The set up of laboratory facilities is under progress. |

| S. No | EC Amendment conditions dtd. 13 th July 2012 | Compliance |
|-------|---|--|
| (i) | Only the sector Specific shall be permitted in the SEZ & those units shall obtain separate Environmental Clearance as applicable. | MSEZL obtained amendment to EC for development of Multi Product units as Mangalore SEZ dated 18 th June 2015. |
| (ii) | Proponent shall enhance the allocation for the CSR activities from 2.5 to 5 % of the total cost & item-wise details along with time bound action plan shall be prepared & submitted to the Ministry's Regional office at Bangalore. Implementation of such program shall be ensured accordingly in a time bound manner. | MSEZL has already taken up CSR activities and details of CSR activity is attached as Annexure- II . |
| (iii) | The green belt shall be 33% all along the periphery & width of the green belt shall be minimum 50 mts. | Noted and will be complied. |



Mangalore SEZ Limited

3rd Floor, MUDA Building, Ashok nagar,

Urwa Stores, Mangalore - 575 006

Phone: 0824-2452748 / 2452750

Fax: 0824-2452749

Website: www.mangaloresez.com

CIN: U45209KA2006PLC038590

| S. No | EC Amendment conditions dtd. 27 th Sep 2014 | Compliance |
|-------|---|--|
| (i) | The project proponent while carrying out the road widening works towards river side should not cause any impact to the river water flow and should be clear of river water way. | Complied. |
| (ii) | The project proponent to take up the bank protection works like stone pitching etc to avoid soil erosion of the banks. | River bank protection works as directed by WRDO are carried out. |
| (iii) | The project proponent to take up all adequate measures to mitigate the dust pollution during the road widening works. | Noted and complied. |
| (iv) | The proponent shall not dump any construction wastes etc in the river portion. | Noted and complied. |

With Regards

A blue ink signature in cursive script, appearing to read 'John Sonenwinkel'.

Sr. General Manager

Civil & Environment

Mangalore SEZ Ltd.

Encl.:

1. Monitoring reports for Air, Water & Noise Environment.
2. Environmental compliance report & Environmental Monitoring Reports from OMPL.

Copy to: Environmental Officer, Karnataka State Pollution Control Board, Mangalore.




Mangalore SEZ Limited

ENVIRONMENTAL MONITORING REPORT

AMBIENT AIR QUALITY, WATER QUALITY AND NOISE LEVEL MONITORING
REPORT FOR THE MONTH OF AUGUST 2017

Submitted to

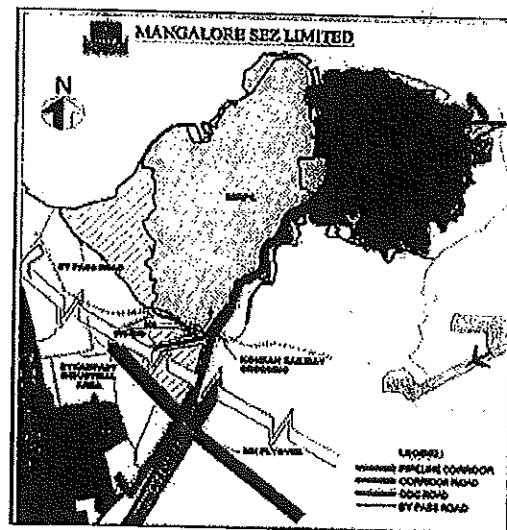

Submitted By



M/s Hubert Enviro Care Systems Private Limited
(NABL Accredited & MOEF Recognized Laboratory)
7/C-45, Baikampady Industrial Estate, Mangaluru, Karnataka - 575011
Email: krom@hecs.in; kro@hecs.in

INDEX

| | | |
|----------|---|--------------|
| 1 | Introduction - M SEZ | 1 |
| 2 | Environmental Monitoring | 1 |
| 3 | Scope and Methodology | 1-11 |
| 3.1 | Ambient Air Quality | 1-8 |
| 3.2 | Noise Level | 9-10 |
| 3.3 | Water Quality | 11 |
| 4 | Results | 12 |
| 4.1 | Ambient Air Quality | 12-13 |
| 4.2 | Noise Level | 14 |
| 4.3 | Water Quality | 15-24 |
| 5 | MSEZ Environmental Monitoring Schedule | 25 |
| 6 | Annexure | 26-29 |

AMBIENT AIR, WATER QUALITY AND NOISE MONITORING REPORT - AUGUST 2017

1. INTRODUCTION

Mangalore Special Economic Zone, known as MSEZ is spread across 1638 acres, located 15 km from Mangalore city, off Cochin-Mumbai NH 66, 5 km from Mangalore International Airport and 8 km from all-weather deep draft sea port, New Mangalore Port in Mangalore, Karnataka, India. MSEZ limited is jointly promoted by Oil and Natural Gas Corporation (ONGC), a fortune 500 company and infrastructure leasing & finance services, one of India's leading infrastructure development and finance companies, Karnataka Industrial Area Development Board (KIADB) and Kanara Chamber of Commerce and Industry (KCCI). A unique combination of Government entities, a large financial institution and an apex chamber brings in the expertise to develop MSEZL with world-class industrial infrastructure.

2. ENVIRONMENT MONITORING

Environmental monitoring is being carried out at Mangalore SEZ, following guidelines and regulations of MoEF/CPCB and KSPCB statutory norms. In this regard, MSEZL has awarded the work to M/s Hubert EnviroCare Systems Pvt Ltd. and to monitor air quality, water quality & noise level for the three years. As per work order, during August 2017, we have conducted ambient air quality, ground water quality and noise level monitoring at 2, 10 and 4 locations respectively.

3. SCOPE AND METHODOLOGY

The scope of work carried out and methodology adopted for the survey are described below:

3.1. Ambient Air Quality

Ambient air quality monitoring was carried out at each location on 24 hour basis on two consecutive days per month. The Identified monitoring stations are: A₁-CETP & A₂-WTP Area. To assess the ambient air quality status, monitoring stations are Identified on the basis of meteorology in the upwind and downwind direction as well as to represent the cross sectional scenario of the MSEZ. Based on the activities the parameters chosen for assessment of air quality are PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂ Sulphur dioxide; NO₂-Nitrogen-di-oxide; CO-Carbon Mono Oxide (DL 0.1 mg/m³); O₃-Ozone (DL 10 µg/m³); NH₃-Ammonia (DL 5 µg/m³); Pb-Lead (DL 0.05 µg/m³); As-Arsenic (DL 0.1 ng/m³); Ni- (DL 0.5 ng/m³); Benzene-(DL 1 µg/m³); B(α)P- Benzo-α-pyrene (DL 0.1 ng/m³) as per CPCB stipulation.

3.1.1. Sampling and analysis of PM_{2.5} and PM₁₀ in ambient air (Gravimetric Method)

- i. Condition a filter paper in oven (i.e. 10 or 2.5 µm diameter)
- ii. Prepare a sampling assembly by uncorking screws of the bracket
- iii. Take a tare (initial) weight of the filter paper (w_i , mg)
- iv. Place the filter in the sampling system securely and tighten the screws of the bracket
- v. Set the timer for the period of sampling
- vi. Start the sampler and adjust flow rate to about 2L/ min for 24 hrs sampling
- vii. Note the flow rate at the end of the desired sampling period and stop the sampler
- viii. Transit the sampling train to environmental laboratory carefully with scientific precautions
- ix. Condition the filter paper again for the same period as was done prior to sampling.

Laboratory analysis:

Weighing of exposed samples:

- i. Take final weight of the exposed filter with a standard balance (w_f , mg)

Calculations:

- i. Average flow rate (initial and final flow rates) in L/ min
 $= (\text{Initial flow rate} + \text{final flow rate}) / 2$
- ii. Total vol. of air sampled (TVA) in m³
 $= \text{Avg. flow rate (L/min)} * 10^{-3} (\text{m}^3/\text{L}) * \text{sampling time (hr)} * 60 (\text{min/hr})$
- iii. Concentration of SPM in µg/m³
 $= (w_f - w_i) (\text{mg}) / \text{TVA (m}^3\text{)} * 10^6 \mu\text{g/m}^3$

3.1.2. Sampling and analysis of Sulphur dioxide

- i. Prepare absorbing reagent (sodium tetra-chloromercurate) by dissolving 27.2 g mercuric chloride and 11.7 g sodium chloride in 1 lit of water
- ii. Prepare a sampling train of at least 2 gas bubblers (for average reading) properly washed with distilled water and air dried.
- iii. Place bubblers in the sampling system securely connecting to the manifold. Check the connections of bubblers with the manifold and the inlet and outlet
- iv. Fill the bubblers with an absorbing reagent with an amount sufficient to last for 24 hours (approximately 15 ml for 8 hours sampling to 50 ml for 24 hours sampling)
- v. To eliminate interference of traces metals, if any ,1 drop of 0.01% EDTA solution may be added to the reagent prior to sampling ;similarly, effect of oxide of nitrogen may also be eliminated by adding 1 ml of 0.06% sulphamic acid to the reagent at site
- vi. Start the sampler and adjust flow rate to 2 lit/ min.
- vii. Note the flow rate at the end of desired sampling period and stop the sampler
- viii. Transit the sampling train to environmental laboratory carefully with scientific precautions and preserve the sample tubes in a controlled environmental conditions

Laboratory analysis:**Calibration curve:**

- I. Prepare a standard solution of SO₂ concentrations ranging from 0 to 25 µg SO₂ by taking definite amount of std. sulphur dioxide solution in a 25 ml volumetric flasks
- II. Add 14 ml of absorbing reagent and 1 ml of pararosaniline hydrochloride to each of the flasks making a total volume of 20 ml.
- III. Measure absorbance for each flasks by spectrophotometer at 540 nm wavelength
- IV. Plot graph of absorbance v/s concentration

Absorbance in samples:

- I. Transfer samples to a 25 ml flask and develop colour as done in calibration curve
- II. Measure absorbance at 540 nm
- III. Find-out the concentration (μgSO_2) corresponding to the measured absorbance from the calibration curve

Calculations:

- I. Average flow rate (if there is a significant difference in initial and final flow rates)
- II. Total volume of air sampled (TVA) in m³
 $= \text{Avg. flow rate (lit)} * 10^{-3} (\text{m}^3/\text{lit}) * \text{sampling time (hr)} * 60 (\text{min/hr})$
- III. $\mu\text{gSO}_2/\text{TVA}$

3.1.3. Sampling and analysis of Nitrogen-di-oxide

- I. Prepare absorbing reagent (a solution of sodium hydroxide and arsenite) by dissolving 4 g sodium hydroxide and 1 g of sodium arsenite in 1 lit of distilled water
- II. Prepare a sampling train of at least 2 gas bubblers(for average reading) properly washed with distilled water and air dried .
- III. Place bubblers in the sampling system securely connecting to the manifold. Check the connections of bubblers with the manifold and the inlet and outlet
- IV. Fill the bubblers with an absorbing reagent with an amount sufficient to last for 24 hours (approximately 15 ml for 8 hours sampling to 50 ml for hours sampling)
- V. To eliminate interference of sulphur dioxide , drop of hydrogen peroxide may be added to the reagents to convert sulphur dioxide into sulphate during analysis
- VI. Start the sampler and adjust flow rate to about 0.2 lit/ min for 24 hours sampling
- VII. Note the flow rate at the end of desired sampling period and stop the sampler
- VIII. Transit the sampling train to environmental laboratory carefully with scientific precautions and preserve the sample tubes in a controlled environmental conditions

Laboratory analysis:**Calibration curve:**

- i. Prepare a standard solution of NO_x concentrations ranging from 0 to 25 µg SO₂ by taking definite amount of std. sulphur dioxide solution in a 25 ml volumetric flasks
- ii. Add 14 ml of absorbing reagent and 1 ml of pararosaniline hydrochloride to each of the flasks making a total volume of 20 ml.
- iii. Measure absorbance for each flasks by spectrophotometer at 540 nm wavelength
- iv. Plot graph of absorbance v/s concentration

Absorbance in samples:

- i. Transfer samples to a 25 ml flask and develop colour as done in calibration curve
- ii. Measure absorbance at 540 nm
- iii. Find out the concentration (µg NO_x) corresponding to the measured absorbance from the calibration curve

Calculations:

- i. Average flow rate (if there is a significant difference in initial and final flow rates)
- ii. Total volume of air sampled (TVA) in m³

$$= \text{Avg. flow rate } (l/t) * 10^{-3} (\text{m}^3/l/t) * \text{sampling time (hr)} * 60 (\text{min/hr})$$

$$\mu\text{gNO}_x/\text{TVA}$$

3.1.4. Sampling and analysis of Carbon Mono Oxide**Preparation of sample train:**

- i. Sampling begins with conditioning a sampling train and then gas analyzer
- ii. Pressure system is preferred to condition the sampling train by installing pump before the analyzer. Reducing valve needs to be fitted between the analyser and pump to eliminate the pulsing effect of pump on the analyzer
- iii. Flow meter is to be installed just before the analyzer
- iv. A fibre filter is used to capture the particulate matter prior to the optical cell to prevent its interference. As it often accumulates on the optical cell reducing the efficiency
- v. To eliminate the interference of water vapour ,refrigeration or desiccant with magnesium perchlorate may be used

Mode of operation:

- i. Continuous analysis is carried out at the flow rate of about 100 ml/min to 1000 ml/min (depending upon the level of pollution near the location) for the desired sampling period
- ii. Discrete sampling may also be possible with infra red analyzer. It however requires proper cleaning of the sampling train.

Steps:

- i. Calibration of analyzer can be carried out if required using standard gases
- ii. Sampler is allowed to warm up for some time before actual readings are taken till the sampler gives steady response and temperature stability

3.1.5. Sampling and analysis of Ozone**Dynamic calibration:**

- i. Dynamic calibration may be performed by preparing a large mixture of ozone in air
- ii. The output of an ozonizer is fed into the intake of a small blower delivering air. The mixture of gas however emerges through a short length of pipe
- iii. One portion of this mixture is analyzed in the recorder.
- iv. Another portion is analyzed through a faintly blue iodine solution containing starch and potassium iodide.
- v. Titrated this solution with sodium thiosulphate(0.1N)
- vi. The end point established by comparison with the blue starch- iodine solution
- vii. Mixture of ozone and air in polyester film bag may be prepared and admitted to the analyzer.
- viii. The mixture is analyzed at the time it is used since the ozone decomposes gradually
- ix. Analysis is then performed by passing a measured volume through an impinge containing buffered KI solution and determined the released iodine by spectrometer method
- x. Make the second mixture about midscale concentration and adjust sample or reagent flow rates until the recorder reading agrees with the absorbance scale according to the analytically determined concentration of ozone
- xi. Check several other points on the curve if desired and liner or logarithmic chart may be prepared followed by a calibration curve to read in ppm

Laboratory analysis:**Calibration curve:**

- i. Plot graph of absorbance v/s concentration

Procedure:

- i. Place a fresh absorbent solution in the storage bottle and operate the solution pump until the liquid are full
- ii. After the flow has stabilized itself, zero the recorder and start the air pump
- iii. Set the flow at convenient rates such as 4 ml/ min of solution and 4 l/min of air
- iv. Check and adjust the flow rates daily.
- v. Adjust the pH of the solution once or twice a week ,at time the solution shall be brought up to volume by addition of distilled water
- vi. Change the carbon filter about once a month. Also change the absorbing solution at the same time

3.1.6. Sampling and analysis of Ammonia:

Ammonia is collected in dilute Sulphuric acid solution in midget impingers to form Ammonium Sulphate. The solution is treated with Nesselers reagent to produce a yellow brown complex. The Ammonia concentration is determined by reading the absorption of the complex at 440 nm and comparing with a standard curve.

3.1.7. Sampling and analysis of Lead, Nickel, Arsenic:

1. Sampling procedure:

Tilt back the inlet and secure it according to manufacturer's instructions. Loosen the face-plate wing-nuts and remove the face plate. Remove the filter from its jacket and centre it on the support screen with the rough side of the filter facing upwards. Replace the face-plate and tighten the wing-nuts to secure the rubber gasket against the filter edge. Gently lower the inlet. For automatically flow-controlled units, record the designated flow rate on the data sheet. Record the reading of the elapsed time meter. The specified length of sampling is commonly 8 hours or 24 hours. During this period, several reading (hourly) of flow rate should be taken. After the required time of sampling, record the flow meter reading and take out the filter media from the sampler and put in a container or envelope

2. Analysis:

i. Hot plate procedure:

Cut a 1" x 8" strip or half the filter from the 8" x 10" filter using a stainless steel pizza cutter. Place the filter in a beaker using vinyl gloves or plastic forceps. Cover the filter with the extraction solution (3% HNO₃ & 8% HCl). Place beaker on the hotplate, contained in a fume hood, and reflux gently while covered with a watch glass for 30 min. Do not allow sample to dry. Remove the beakers from the hot-plate and allow to cool. Rinse the beaker walls and wash with distilled water. Add approximately 10 mL reagent water to the remaining filter material in the beaker and allow to stand for at least 30 min. Transfer the extraction fluid in the beaker to a 100 mL volumetric flask or other graduated vessel. Rinse the beaker and any remaining solid material with distilled water and add the rinses to the flask. Dilute to the mark with distilled water (Type I) water and shake. The final extraction solution concentration is 3 % HNO₃/8% HCl. The filtered sample is now ready for analysis

2.1. Analysis of samples:

i. Instrument / Equipment:

A light beam containing the corresponding wavelength of the energy required to raise the atoms of the analyte from the ground state to the excited state is directed through the flame or furnace. This wavelength is observed by a monochromator and a detector that measure the amount of light absorbed by the element, hence the number of atoms in the ground state in the flame or furnace. A hollow cathode lamp for the element being determined provides a source of that metal's particular absorption wavelength. The method describes both flame atomic absorption (FAA) spectroscopy and graphite furnace atomic absorption (GFAA) spectroscopy. Atomic Absorption Spectrophotometer - analyze the metals by Flame, if results are below detection limit then go for GTA. Arsenic is analyzed by Flame - VGA.

ii. Flame Procedure:

Set the atomic absorption spectrophotometer for the standard condition as follows: choose the correct hollow cathode lamp, align the instrument, position the monochromator at the value recommended by the manufacturer, select the proper monochromator slit width, set the light source current, ignite the flame, regulate the flow of fuel and oxidant, adjust the burner for maximum absorption and stability and balance the meter. Run a series of standards of the metal of interest and construct a calibration curve. Aspirate the blanks and samples. Dilute samples that exceed the calibration range. For Lead (Pb) and Nickel (Ni), the wavelength required for analysis is 217nm and 232nm respectively. Where as in case of Arsenic (As), the VGA should attach with Flame and the wavelength required for analysis is 193.7nm.

3. Calibration:

Prepare standard solutions from the stock solutions. Select at least three standards to cover linear range as recommended by method. Aspirate the standards into the flame or inject the standards into the furnace and record the absorbance. Prepare the calibration graph by plotting absorbance and concentration in $\mu\text{g}/\text{ml}$.

i. Preparation of Standards:

For each metal that is to be determined, standards of known concentration must be acquired commercially certified standards.

ii. Standard Curve:

Standard curve is prepared by using standard solutions of known concentration.

4. Calculations:**i. Sample Air Volume:**

Sample air volume can be calculated by using the following equation:

$$V = (Q)(t)$$

Where,

V = volume of air, m^3

Q = average sampling rate, m^3/min .

t = time in minutes.

ii. Metal Concentration:

$$C = (Ms - Mb) \times Vs \times Fa / V \times Ft$$

Where,

C = concentration, $\mu\text{g metal}/\text{m}^3$

Ms = metal concentration $\mu\text{g/mL}$

Mb = blank concentration $\mu\text{g/mL}$

Vs = total volume of extraction in mL

Fa = total area of exposed filter in cm^2

V = Volume of air sampled in m^3

Ft = Area of filter taken for digestion in cm^2

3.1.8. Sampling and analysis of Benzo- α -pyrene:

Benzo (a) Pyrene (BaP) is one of the most important constituent of PAH compounds and also one of the most potent carcinogens. This can be measured in both particulate phase and vapour phase. In the vapour phase the concentration of B(a)P is significantly less than the particulate phase. Therefore, more care to be taken for the measurement of Benzo (a) Pyrene in the particulate phase. The molecular formula of B(a)P is $C_{20}H_{12}$ having molecular weight 252.

It is based on BIS method IS 5182 (Part 12):2004 and USEPA method (TO-13). This method is designed to collect particulate phase PAHs in ambient air and fugitive emissions and to determine individual PAH compounds using capillary gas chromatograph equipped with flame ionization detector. It is a high volume (1.2m³/min) sampling method capable of detecting sub.ng/m³ concentration of PAH in 24 hours sample (i.e. collected in 3 shifts of 8 hour each with 480 m³ sampling volume of air).

i. Sampling:

i. Instrument/Filter Selection:

24 hr. sampling using PM₁₀ high volume sampler with 8 hourly samples using EPM-2000 glass fibre or equivalent filter.

ii. Sample Processing

a. Extraction:

Filter papers (half of all the filters papers collected in a day) are cut into strips using scissors and transfer to 250 ml beaker. Add ~50 ml. of Toluene (GC/HPLC grade). These samples are extracted with toluene using ultra sonic bath. Sample can be extracted using soxhlet bath for about 30 minutes. Repeat the procedure twice (50ml x 2 times) for complete extraction. Alternatively, extraction apparatus for about 8 hr. with Toluene and repeat it twice.

b. Filtration:

Filter the extracted samples with Whatman filter paper No. 41 containing 2 gm of Anhydrous Sodium Sulphate (to remove moisture).

c. Concentration:

After filtration, the filtrate is concentrated using Rotary vacuum evaporator to 2ml final volume.

d. Clean-up with silica Gel:

To clean up the impurities, pass 2 ml of concentrated sample through silica gel column (pre conditioned, 60-80 mesh, and 200-250mmx10 mm with Teflon stopcock). After cleaning add 5ml cyclohexane and collect the elute in 25 ml beaker. Repeat the process for at least 3 times and collect it in the same beaker. Alternatively Solid Phase Extraction (SPE) may be used for clean up the impurities of sample.

e. Re-concentration with rotary vacuum evaporator:

The Cleaned up extract/filtrate (approximately 17 ml) is further concentrated using rotary evaporator and it is evaporated to nearly dryness with Nitrogen.

f. Final Sample volume:

The dried sample is re-dissolved in 1ml of toluene and transfer into 4 or 5 ml amber vials final analysis.

ii. Calculations:

Calculate the concentration in ng/ μ l of each identified analyte or B(a)P in the sample extract (Cs) as follows:

Calculate the air volume from the periodic flow reading taken during sampling using the following equation:

$$V = Q \times T$$

Where,

Q = Average flow rate of sampling m³/min

T = sampling time, in min.

V = total sample volume at ambient conditions in m³

Concentration of analyte i.e B(a)P:

The concentration of PAH compound or Benzo(a)pyrene in ng /m³ in the air sampled is given by:

$$C \text{ (ng /m}^3\text{)} = C_s * V_e / V_i * V_s$$

Where,

C_s : Concentration of Benzo (a) pyrene in ng / μ l in the sample extract recorded by GC.

V_e : Final volume of extract in μ l (i.e 1000)

V_i : Injection Volume (i.e 1 μ l)

V_s : Volume of air sample in m³

3.2 Noise Levels

In general, noise is sound which is composed of many frequency components of various loudness distributed over the audible frequency range. Various noise scales have been introduced to describe, in a single number, the response of an average human to a complex sound made up of various frequencies at different loudness levels. The most common and universally accepted scale is the A weighted scale which is measured as decibel (dB). This is more suitable for audible range of 20 to 20000 HZ and has been designed to weigh various components of noise according to the response of human ear.

The impact of noise from the construction can be undertaken by taking in to consideration various factors like potential damage to hearing. Physiological responses, annoyance and general community responses, which have several effects, like Noise Induced Hearing Loss (NIHL). Noise generating sources are identified based on the activities like vehicle movement & associated construction activities. Accordingly, about 5 locations were identified to assess the noise levels in different zones viz. IISER Vithura, residential and construction zones. The identified locations are:

N₁-CETP and N₂-WTP

Noise measurements were carried out using Lutron SL 4001 model. The sound level meter used was in accordance with IS: 9779 and IEC 651 standards for noise survey. Instrument calibration was done in NABL accredited.

Noise measurements were undertaken at all locations, with duration of 10 minutes per hour (as per Order one minute per hour) continuously for 24 hours in a day for two days in a week for four weeks in the month. The day noise levels were monitored during 6 am to 10 pm and night levels during 10 pm to 6 am at all locations.

For noise levels measured over a given period of time interval, it is possible to describe important features of noise using statistical quantities. This is calculated using the percent of the time certain noise levels are exceeded during the time interval. The notation for the statistical quantities of noise levels are:

L10 is the noise level exceeded 10 percent of the time,

L50 is the noise level exceeded 50 percent of the time and

L90 is the noise level exceeded 90 percent of the time.

Leq is the Equivalent sound pressure level, which is equivalent to the same sound energy as the actual fluctuating sound.

This is necessary because sound from noise source often fluctuates widely during a given period of time. Leq is calculated from the following equation:

$$\text{Leq (hrly)} = \text{L50} + [(\text{L10}-\text{L90})^2/60]$$

The noise rating developed for community noise from all sources is the Day-Night sound Level (Ldn). It is similar to a 24 hrs, equivalent sound level except that during night time period a 10 dB(A) weighting penalty is added to the instantaneous sound level before computing the 24 hourly average. This nighttime penalty is added to account for the fact that noise during night when people usually sleep is judged as more annoying than the same noise during the daytime.

The Ldn for a given location in a community is calculated from the hourly Leq values by the following equation: $\text{Ldn} = 10 \log (1/24 (16[10^{\text{Ld}/10}] + [10^{\text{Ln}-10/10}]))$

Where Ld is the equivalent sound level during the day time (6 am to 10 pm) and Ln is the equivalent Sound level during the night time (10 pm to 6 am).

Ambient Noise standards have been notified by the Ministry of environment and Forests vide Gazette notification dated 18th November, 2009 based on the 'A' weighted equivalent noise level (Leq). The standards are given in the Annexure.

Noise measurements were made at 1.5 m above the ground level and a suitable distance from the corridor. The basic Unit of measurements were taken in the fast mode and were sampled to yield statistical information's such as Leq (equivalent noise level), L 10 and L9, those exceeded for 10 and 90 percent of the time respectively. The noise level L10 can be considered as long term noise L90 can be considered as the background noise.

Calibration: The monitoring and analytical instruments are being calibrated by ETDC periodically. The correction factors, if any, are being used in computation of the data.

3.3 Water Quality

Any adverse impact or pollution water will have serious effect on the environment. Hence, it becomes important to monitor the water quality periodically in the port project area. The samples were analysed as per IS: 3025 and compared to the specifications of IS: 10500 norms. The locations identified for collection of samples were

- W₁-Oddidakal (GW)
- W₂-Shantigudde
- W₃-Chandrahast Nagar (GW)
- W₄- Permude (GW)
- W₅- Permude (SW)
- W₆- CETP (GW)
- W₇- Non Processing Area (GW)
- W₈- Permude Bajpe Village Bandary (GW)
- W₉- Kalavar
- W₁₀- 10ml water Reservoir

4.0 Results

4.1 Ambient Air Quality

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|---|
| Name of the Industry | M/s. Mangalore SEZ Limited |
| Address of the Industry | 3 rd Floor, MUDA Building, Ashok Nagar, Urwa Stores, Mangalore- 575006 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | CETP |
| Sampling Date | 17.08.2017 |
| Report Date | 11.09.2017 |
| Report No | HECS/AA/001/110917 |

CONSOLIDATED TEST RESULTS: AUGUST 2017

| Parameter Monitored | NAAQ Standard, 2009 | Results |
|--|---------------------|---------|
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60* | 17 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100* | 49 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80* | 11 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80* | 12 |
| CO (mg/m^3) | 2** | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100** | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400* | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1* | BDL |
| As (ng/m^3) | 6*** | BDL |
| Ni (ng/m^3) | 20*** | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 5*** | BDL |
| B(α)P (ng/m^3) | 1*** | BDL |

Note: * : 24 hours average; ** : 8 hours average; *** : Annual average

Note: BDL =Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂ Sulphur dioxide; NO₂ - Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³); O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$); NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$); As-Arsenic (DL 0.1 ng/m³); Ni-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(α)P- Benzo - α -pyrene (DL 0.1 ng/m³); ng/m³: nanogram per cubic meter; $\mu\text{g}/\text{m}^3$ - microgram per cubic meter


CONCLUSION: All the parameters meet the NAAQ Standards, 2009

*****End of Report *****

Sampled by

Prepared by

Checked by
Shilpa

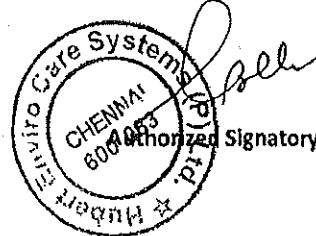

TEST REPORT: AMBIENT AIR MONITORING (AAQ): AUGUST 2017

| | |
|-------------------------|---|
| Name of the Industry | M/s. Mangalore SEZ Limited |
| Address of the Industry | 3 rd Floor, MUDA Building, Ashok Nagar, Urwa Stores, Mangalore- 575006 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | WTP |
| Sampling Date | 18.08.2017 |
| Report Date | 11.09.2017 |
| Report No | HECS/AA/002/110917 |

| Parameter Monitored | NAAQ Standard, 2009 | Results |
|--|---------------------|---------|
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60* | 17 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100* | 49 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80* | 11 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80* | 12 |
| CO (mg/m^3) | 2** | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100** | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400* | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1* | BDL |
| As (ng/m^3) | 6*** | BDL |
| Ni (ng/m^3) | 20*** | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 5*** | BDL |
| B(α)P (ng/m^3) | 1*** | BDL |

Note: * 24 hours average; ** 8 hours average; *** Annual average

Note: BDL =Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂ Sulphur dioxide; NO₂ - Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³); O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$); NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$); As-Arsenic (DL 0.1 ng/m³); Ni-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(α)P- Benzo- α -pyrene (DL 0.1 ng/m³); ng/m³: nanogram per cubic meter; $\mu\text{g}/\text{m}^3$ - microgram per cubic meter


CONCLUSION: All the parameters meet the NAAQ Standards, 2009

*****End of Report *****


Sampled by


Prepared by


Checked by



4.2 Noise level:

TEST REPORT: NOISE MONITORING: AUGUST 2017

| | |
|-------------------------|---|
| Name of the Industry | M/s. Mangalore SEZ Limited |
| Address of the Industry | 3 rd Floor, MUDA Building, Ashok Nagar, Urwa Stores, Mangalore- 575006 |
| Sample Description | Noise Monitoring |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | CETP & WTP areas |
| Sampling Date | 29.08.2017 |
| Report Date | 11.09.2017 |
| Report No. | HECS/N/001-002/110917 |

| Time (Hrs) | CETP AREA | WTP AREA |
|-------------|-----------|----------|
| 06.00 | 66.8 | 66.1 |
| 07.00 | 67.5 | 67.0 |
| 08.00 | 62.4 | 62.6 |
| 09.00 | 61.2 | 62.1 |
| 10.00 | 64.0 | 61.0 |
| 11.00 | 61.1 | 65.1 |
| 12.00 | 63.8 | 68.4 |
| 13.00 | 69.3 | 67.5 |
| 14.00 | 62.1 | 60.3 |
| 15.00 | 65.2 | 61.6 |
| 16.00 | 71.4 | 63.0 |
| 17.00 | 70.0 | 61.9 |
| 18.00 | 60.5 | 64.5 |
| 19.00 | 61.7 | 69.3 |
| 20.00 | 59.0 | 63.9 |
| 21.00 | 58.4 | 59.2 |
| 22.00 | 55.5 | 59.1 |
| 23.00 | 53.1 | 54.0 |
| 00.00 | 57.2 | 52.3 |
| 01.00 | 55.0 | 46.0 |
| 02.00 | 46.4 | 45.4 |
| 03.00 | 48.6 | 46.5 |
| 04.00 | 44.1 | 47.8 |
| 05.00 | 47.5 | 49.7 |
| MIN | 44.1 | 45.4 |
| MAX | 71.4 | 69.3 |
| Day dB(A) | 63.5 | 63.7 |
| Night dB(A) | 50.3 | 48.8 |

Limits: Industrial Area: Day Time-75 dB (A), Night Time-70 dB (A). Commercial Area: Day Time-65 dB (A), Night Time-55 dB (A). Residential Area: Day Time-55 dB (A), Night Time-45 dB (A). Silence Zone: Day Time-50 dB (A), Night Time-40 dB (A).


Note: Monitoring Date represents 24 hours from 6:00 am to 6:00am next day. Legend: Leq- Equivalent Noise Level (hourly); Ld-Day Time Equivalent Noise Level (06:00-22:00 hrs); Ln-Night Time Equivalent Noise Level (22:00-06:00 hrs); and Ldn-24 hourly Equivalent Noise Level. Reference: The Noise Pollution (Regulation and Control) Rules, 2000, CPCB, New Delhi

CONCLUSION: All the parameters meet MoEF Standards

Sampled by

Prepared by

Checked by



Enviro Care Systems (P) Ltd
CHENNAI
600 0483
Authorised Signatory
Raj

4.3 Water Analysis Results

TEST REPORT

| | | | |
|-------------------------|---|--|--|
| Name of the Industry | M/s. Mangalore SEZ Limited | | |
| Address of the Industry | 3 rd Floor, MUDA Building, Ashok Nagar, Urwa Stores, Mangalore- 575006 | | |
| Sample Description | Oddidakal (GW) | | |
| Date of Sampling | 10.08.2017 | | |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd | | |
| Report Date | 11.09.2017 | | |
| Report No | HECS/W/001/110917 | | |

| Sl.No. | Parameters monitored | Units | Results | As per IS 10500:2012 standard limit | |
|--------|----------------------------------|-----------|---------------|--|-------------------|
| | | | | Acceptable (max) | Permissible (max) |
| 1. | Colour | Hazen | 1 (DL 1) | 5 | 15 |
| 2. | pH (at 25 °C) | - | 6.9 | 6.5-8.5 | No Relaxation |
| 3. | Electrical Conductivity | µS/cm | 97 | NIL | NIL |
| 4. | Odour | - | Agreeable | Agreeable | Agreeable |
| 5. | Taste | - | Agreeable | Agreeable | Agreeable |
| 6. | Turbidity | NTU | BDL (DL 0.1) | 1 | 5 |
| 7. | Total Dissolved Solids | mg/L | 63 | 500 | 2000 |
| 8. | Alkalinity as CaCO ₃ | mg/L | 51 | 200 | 600 |
| 9. | Total Hardness | mg/L | 48 | 200 | 600 |
| 10. | Calcium as Ca | mg/L | 16 | 75 | 200 |
| 11. | Magnesium as Mg | mg/L | 2 | 30 | 100 |
| 12. | Iron as Fe | mg/L | BDL(DL 0.02) | 0.3 | No Relaxation |
| 13. | Sulphate as SO ₄ | mg/L | 5.5 | 200 | 400 |
| 14. | Chloride as Cl | mg/L | 15 | 250 | 1000 |
| 15. | Boron as B | mg/L | BDL(DL 0.1) | 0.5 | 1.0 |
| 16. | Residual free chlorine | mg/L | BDL (DL 0.1) | 0.2 | 1 |
| 17. | Fluoride | mg/L | 0.22 | 1.0 | 1.5 |
| 18. | Phenolic Compounds | mg/L | BDL(DL 0.001) | 0.001 | 0.002 |
| 19. | Manganese as Mn | mg/L | BDL(DL 0.01) | 0.1 | 0.3 |
| 20. | Zinc as Zn | mg/L | BDL(DL 0.01) | 5 | 15 |
| 21. | Arsenic as As | mg/L | BDL(DL 0.005) | 0.01 | 0.05 |
| 22. | Cyanide as CN | mg/L | BDL (DL 0.01) | 0.05 | No Relaxation |
| 23. | Cadmium as Cd | mg/L | BDL(DL 0.01) | 0.003 | No Relaxation |
| 24. | Chromium as Cr | mg/L | BDL(DL 0.01) | 0.05 | No Relaxation |
| 25. | Aluminium | mg/L | BDL(DL 0.02) | 0.03 | 0.2 |
| 26. | Selenium as Se | mg/L | BDL(DL 0.005) | 0.01 | No Relaxation |
| 27. | Lead as Pb | mg/L | BDL(DL 0.01) | 0.01 | No Relaxation |
| 28. | Mercury as Hg | mg/L | BDL(DL 0.001) | 0.001 | No Relaxation |
| 29. | Nitrate Nitrogen NO ₃ | mg/L | 0.5 | 45 | No Relaxation |
| 30. | E.Coli | MPN/100mL | Nil | Shall not be detectable in any 100 mL sample | |


Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Prepared by

Checked by

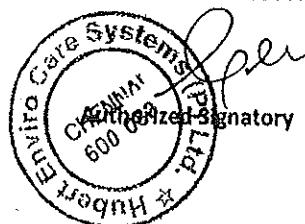

TEST REPORT

| | | | |
|-------------------------|---|--|--|
| Name of the Industry | M/s. Mangalore SEZ Limited | | |
| Address of the Industry | 3 rd Floor, MUDA Building, Ashok Nagar, Urwa Stores, Mangalore- 575006 | | |
| Sample Description | Shantilguppe | | |
| Date of Sampling | 10.08.2017 | | |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd | | |
| Report Date | 11.09.2017 | | |
| Report No | HECS/W/002/110917 | | |

| Sl.No. | Parameters monitored | Units | Results | As per IS 10500:2012 standard limit | |
|--------|----------------------------------|-----------|---------------|---|-------------------|
| | | | | Acceptable (max) | Permissible (max) |
| 1. | Colour | Hazen | 2 (DL 1) | 5 | 15 |
| 2. | pH (at 25 °C) | - | 6.7 | 6.5-8.5 | No Relaxation |
| 3. | Electrical Conductivity | µS/cm | 109 | Nil | Nil |
| 4. | Odour | - | Agreeable | Agreeable | Agreeable |
| 5. | Taste | - | Agreeable | Agreeable | Agreeable |
| 6. | Turbidity | NTU | BDL(DL 0.1) | 1 | 5 |
| 7. | Total Dissolved Solids | mg/L | 71 | 500 | 2000 |
| 8. | Alkalinity as CaCO ₃ | mg/L | 61 | 200 | 600 |
| 9. | Total Hardness | mg/L | 49 | 200 | 600 |
| 10. | Calcium as Ca | mg/L | 8.5 | 75 | 200 |
| 11. | Magnesium as Mg | mg/L | 3.5 | 30 | 100 |
| 12. | Iron as Fe | mg/L | BDL(DL 0.02) | 0.3 | No Relaxation |
| 13. | Sulphate as SO ₄ | mg/L | 6.1 | 200 | 400 |
| 14. | Chloride as Cl | mg/L | 32 | 250 | 1000 |
| 15. | Boron as B | mg/L | BDL(DL 0.1) | 0.5 | 1.0 |
| 16. | Residual free chlorine | mg/L | BDL(DL 0.1) | 0.2 | 1 |
| 17. | Fluoride | mg/L | 0.27 | 1.0 | 1.5 |
| 18. | Phenolic Compounds | mg/L | BDL(DL 0.001) | 0.001 | 0.002 |
| 19. | Manganese as Mn | mg/L | BDL(DL 0.01) | 0.1 | 0.3 |
| 20. | Zinc as Zn | mg/L | BDL(DL 0.01) | 5 | 15 |
| 21. | Arsenic as As | mg/L | BDL(DL 0.005) | 0.01 | 0.05 |
| 22. | Cyanide as CN | mg/L | BDL (DL 0.01) | 0.05 | No Relaxation |
| 23. | Cadmium as Cd | mg/L | BDL(DL 0.01) | 0.003 | No Relaxation |
| 24. | Chromium as Cr | mg/L | BDL(DL 0.01) | 0.05 | No Relaxation |
| 25. | Aluminium | mg/L | BDL(DL 0.02) | 0.03 | 0.2 |
| 26. | Selenium as Se | mg/L | BDL(DL 0.005) | 0.01 | No Relaxation |
| 27. | Lead as Pb | mg/L | BDL(DL 0.01) | 0.01 | No Relaxation |
| 28. | Mercury as Hg | mg/L | BDL(DL 0.001) | 0.001 | No Relaxation |
| 29. | Nitrate Nitrogen NO ₃ | mg/L | 1.6 | 45 | No Relaxation |
| 30. | E.Coli | MPN/100mL | Nil | Shall not be detectable in any 100 mL sample | |


Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Prepared by

Checked by



TEST REPORT


| | |
|-------------------------|---|
| Name of the Industry | M/s. Mangalore SEZ Limited |
| Address of the Industry | 3 rd Floor, MUDA Building, Ashok Nagar, Urwa Stores, Mangalore- 575006 |
| Sample Description | Chandrasagar(GW) |
| Date of Sampling | 10.08.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 11.09.2017 |
| Report No | HECS/W/003/110917 |

| Sl.No. | Parameters monitored | Units | Results | As per IS 10500:2012 standard limit | |
|--------|----------------------------------|-----------|---------------|--|-------------------|
| | | | | Acceptable (max) | Permissible (max) |
| 1. | Colour | Hazen | 1 (DL 1) | 5 | 15 |
| 2. | pH (at 25 °C) | - | 6.6 | 6.5-8.5 | No Relaxation |
| 3. | Electrical Conductivity | µS/cm | 78 | Nil | NII |
| 4. | Odour | - | Agreeable | Agreeable | Agreeable |
| 5. | Taste | - | Agreeable | Agreeable | Agreeable |
| 6. | Turbidity | NTU | BDL (DL 0.1) | 1 | 5 |
| 7. | Total Dissolved Solids | mg/L | 51 | 500 | 2000 |
| 8. | Alkalinity as CaCO ₃ | mg/L | 21 | 200 | 600 |
| 9. | Total Hardness | mg/L | 18 | 200 | 600 |
| 10. | Calcium as Ca | mg/L | 5.6 | 75 | 200 |
| 11. | Magnesium as Mg | mg/L | 2.2 | 30 | 100 |
| 12. | Iron as Fe | mg/L | BDL(DL 0.02) | 0.3 | No Relaxation |
| 13. | Sulphate as SO ₄ | mg/L | 2.5 | 200 | 400 |
| 14. | Chloride as Cl | mg/L | 20 | 250 | 1000 |
| 15. | Boron as B | mg/L | BDL(DL 0.1) | 0.5 | 1.0 |
| 16. | Residual free chlorine | mg/L | BDL (DL 0.1) | 0.2 | 1 |
| 17. | Fluoride | mg/L | 0.25 | 1.0 | 1.5 |
| 18. | Phenolic Compounds | mg/L | BDL(DL 0.001) | 0.001 | 0.002 |
| 19. | Manganese as Mn | mg/L | BDL(DL 0.01) | 0.1 | 0.3 |
| 20. | Zinc as Zn | mg/L | BDL(DL 0.01) | 5 | 15 |
| 21. | Arsenic as As | mg/L | BDL(DL 0.005) | 0.01 | 0.05 |
| 22. | Cyanide as CN | mg/L | BDL (DL 0.01) | 0.05 | No Relaxation |
| 23. | Cadmium as Cd | mg/L | BDL(DL 0.01) | 0.003 | No Relaxation |
| 24. | Chromium as Cr | mg/L | BDL(DL 0.01) | 0.05 | No Relaxation |
| 25. | Aluminium | mg/L | BDL(DL 0.02) | 0.03 | 0.2 |
| 26. | Selenium as Se | mg/L | BDL(DL 0.005) | 0.01 | No Relaxation |
| 27. | Lead as Pb | mg/L | BDL(DL 0.01) | 0.01 | No Relaxation |
| 28. | Mercury as Hg | mg/L | BDL(DL 0.001) | 0.001 | No Relaxation |
| 29. | Nitrate Nitrogen NO ₃ | mg/L | 1.2 | 45 | No Relaxation |
| 30. | E.Coli | MPN/100mL | Nil | Shall not be detectable in any 100 mL sample | |


Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L- Milligrams per Liter; MPN- Most Probable Number; mL-Milliliter


CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report


Prepared by


Checked by




Authorized Signatory

TEST REPORT

| | | | |
|-------------------------|---|--|--|
| Name of the Industry | M/s. Mangalore SEZ Limited | | |
| Address of the Industry | 3 rd Floor, MUDA Building, Ashok Nagar, Urwa Stores, Mangalore- 575006 | | |
| Sample Description | Permude (GW) | | |
| Date of Sampling | 10.08.2017 | | |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd | | |
| Report Date | 11.09.2017 | | |
| Report No | HECS/W/004/110917 | | |

| Sl.No. | Parameters monitored | Units | Results | As per IS 10500:2012 standard limit | |
|--------|----------------------------------|-----------|---------------|--|-------------------|
| | | | | Acceptable (max) | Permissible (max) |
| 1. | Colour | Hazen | 1 (DL 1) | 5 | 15 |
| 2. | pH (at 25 °C) | - | 6.7 | 6.5-8.5 | No Relaxation |
| 3. | Electrical Conductivity | µS/cm | 89 | Nil | Nil |
| 4. | Odour | - | Agreeable | Agreeable | Agreeable |
| 5. | Taste | - | Agreeable | Agreeable | Agreeable |
| 6. | Turbidity | NTU | BDL (DL 0.1) | 1 | 5 |
| 7. | Total Dissolved Solids | mg/L | 58 | 500 | 2000 |
| 8. | Alkalinity as CaCO ₃ | mg/L | 26 | 200 | 600 |
| 9. | Total Hardness | mg/L | 30 | 200 | 600 |
| 10. | Calcium as Ca | mg/L | 9 | 75 | 200 |
| 11. | Magnesium as Mg | mg/L | 2 | 30 | 100 |
| 12. | Iron as Fe | mg/L | BDL(DL 0.02) | 0.3 | No Relaxation |
| 13. | Sulphate as SO ₄ | mg/L | 2.2 | 200 | 400 |
| 14. | Chloride as Cl | mg/L | 21 | 250 | 1000 |
| 15. | Boron as B | mg/L | BDL(DL 0.1) | 0.5 | 1.0 |
| 16. | Residual free chlorine | mg/L | BDL (DL 0.1) | 0.2 | 1 |
| 17. | Fluoride | mg/L | 0.12 | 1.0 | 1.5 |
| 18. | Phenolic Compounds | mg/L | BDL(DL 0.001) | 0.001 | 0.002 |
| 19. | Manganese as Mn | mg/L | BDL(DL 0.01) | 0.1 | 0.3 |
| 20. | Zinc as Zn | mg/L | BDL(DL 0.01) | 5 | 15 |
| 21. | Arsenic as As | mg/L | BDL(DL 0.005) | 0.01 | 0.05 |
| 22. | Cyanide as CN | mg/L | BDL (DL 0.01) | 0.05 | No Relaxation |
| 23. | Cadmium as Cd | mg/L | BDL(DL 0.01) | 0.003 | No Relaxation |
| 24. | Chromium as Cr | mg/L | BDL(DL 0.01) | 0.05 | No Relaxation |
| 25. | Aluminium | mg/L | BDL(DL 0.02) | 0.03 | 0.2 |
| 26. | Selenium as Se | mg/L | BDL(DL 0.005) | 0.01 | No Relaxation |
| 27. | Lead as Pb | mg/L | BDL(DL 0.01) | 0.01 | No Relaxation |
| 28. | Mercury as Hg | mg/L | BDL(DL 0.001) | 0.001 | No Relaxation |
| 29. | Nitrate Nitrogen NO ₃ | mg/L | 0.93 | 45 | No Relaxation |
| 30. | E.Coli | MPN/100mL | Nil | Shall not be detectable in any 100 mL sample | |

Note:-BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report


Prepared by


Checked by



TEST REPORT

| Name of the Industry | M/s. Mangalore SEZ Limited | | | |
|-------------------------|---|-----------|---------------|--|
| Address of the Industry | 3 rd Floor, MUDA Building, Ashok Nagar, Urwa Stores, Mangalore- 575006 | | | |
| Sample Description | Permude(SW) | | | |
| Date of Sampling | 10.08.2017 | | | |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd | | | |
| Report Date | 11.09.2017 | | | |
| Report No | HECS/W/005/110917 | | | |
| Sl.No. | Parameters monitored | Units | Results | As per IS 10500:2012 standard limit |
| | | | | Acceptable (max) |
| 1. | Colour | Hazen | 1 (DL 1) | 5 15 |
| 2. | pH (at 25 °C) | - | 6.8 | 6.5-8.5 |
| 3. | Electrical Conductivity | µS/cm | 52 | Nil Nil |
| 4. | Odour | - | Agreeable | Agreeable |
| 5. | Taste | - | Agreeable | Agreeable |
| 6. | Turbidity | NTU | BDL(DL 0.1) | 1 5 |
| 7. | Total Dissolved Solids | mg/L | 33.8 | 500 2000 |
| 8. | Alkalinity as CaCO ₃ | mg/L | 16 | 200 600 |
| 9. | Total Hardness | mg/L | 20 | 200 600 |
| 10. | Calcium as Ca | mg/L | 6.4 | 75 200 |
| 11. | Magnesium as Mg | mg/L | 1.3 | 30 100 |
| 12. | Iron as Fe | mg/L | BDL(DL 0.02) | 0.3 |
| 13. | Sulphate as SO ₄ | mg/L | 5 | 200 400 |
| 14. | Chloride as Cl | mg/L | 13 | 250 1000 |
| 15. | Boron as B | mg/L | BDL(DL 0.1) | 0.5 1.0 |
| 16. | Residual free chlorine | mg/L | BDL(DL 0.1) | 0.2 1 |
| 17. | Fluoride | mg/L | 0.2 | 1.0 1.5 |
| 18. | Phenolic Compounds | mg/L | BDL(DL 0.001) | 0.001 0.002 |
| 19. | Manganese as Mn | mg/L | BDL(DL 0.01) | 0.1 0.3 |
| 20. | Zinc as Zn | mg/L | BDL(DL 0.01) | 5 15 |
| 21. | Arsenic as As | mg/L | BDL(DL 0.005) | 0.01 0.05 |
| 22. | Cyanide as CN | mg/L | BDL(DL 0.01) | 0.05 |
| 23. | Cadmium as Cd | mg/L | BDL(DL 0.01) | 0.003 |
| 24. | Chromium as Cr | mg/L | BDL(DL 0.01) | 0.05 |
| 25. | Aluminum | mg/L | BDL(DL 0.02) | 0.03 0.2 |
| 26. | Selenium as Se | mg/L | BDL(DL 0.005) | 0.01 |
| 27. | Lead as Pb | mg/L | BDL(DL 0.01) | 0.01 |
| 28. | Mercury as Hg | mg/L | BDL(DL 0.001) | 0.001 |
| 29. | Nitrate Nitrogen NO ₃ | mg/L | 0.54 | 45 |
| 30. | E.Coli | MPN/100mL | Nil | Shall not be detectable in any 100 mL sample |


Note:-BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report


Prepared by


Checked by


Authorized Signatory

TEST REPORT

| Name of the Industry | M/s. Mangalore SEZ Limited | | | |
|-------------------------|---|-----------|---------------|--|
| Address of the Industry | 3 rd Floor, MUDA Building, Ashok Nagar, Urwa Stores, Mangalore- 575006 | | | |
| Sample Description | CETP (GW) | | | |
| Date of Sampling | 10.08.2017 | | | |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd | | | |
| Report Date | 11.09.2017 | | | |
| Report No | HECS/W/006/110917 | | | |
| Sl.No. | Parameters monitored | Units | Results | As per IS 10500:2012 standard limit |
| | | | | Acceptable (max) |
| 1. | Colour | Hazen | 1 (DL 1) | 5 15 |
| 2. | pH (at 25 °C) | - | 6.7 | 6.5-8.5 No Relaxation |
| 3. | Electrical Conductivity | µS/cm | 105 | Nil Nil |
| 4. | Odour | - | Agreeable | Agreeable |
| 5. | Taste | - | Agreeable | Agreeable |
| 6. | Turbidity | NTU | BDL (DL 0.1) | 1 5 |
| 7. | Total Dissolved Solids | mg/L | 68.3 | 500 2000 |
| 8. | Alkalinity as CaCO ₃ | mg/L | 66 | 200 600 |
| 9. | Total Hardness | mg/L | 52 | 200 600 |
| 10. | Calcium as Ca | mg/L | 1.2 | 75 200 |
| 11. | Magnesium as Mg | mg/L | 5.5 | 30 100 |
| 12. | Iron as Fe | mg/L | BDL(DL0.02) | 0.3 No Relaxation |
| 13. | Sulphate as SO ₄ | mg/L | 8 | 200 400 |
| 14. | Chloride as Cl | mg/L | 8 | 250 1000 |
| 15. | Boron as B | mg/L | BDL(DL 0.1) | 0.5 1.0 |
| 16. | Residual free chlorine | mg/L | BDL (DL 0.1) | 0.2 1 |
| 17. | Fluoride | mg/L | 0.16 | 1.0 1.5 |
| 18. | Phenolic Compounds | mg/L | BDL(DL 0.001) | 0.001 0.002 |
| 19. | Manganese as Mn | mg/L | BDL(DL 0.01) | 0.1 0.3 |
| 20. | Zinc as Zn | mg/L | BDL(DL 0.01) | 5 15 |
| 21. | Arsenic as As | mg/L | BDL(DL 0.005) | 0.01 0.05 |
| 22. | Cyanide as CN | mg/L | BDL (DL 0.01) | 0.05 No Relaxation |
| 23. | Cadmium as Cd | mg/L | BDL(DL 0.01) | 0.003 No Relaxation |
| 24. | Chromium as Cr | mg/L | BDL(DL 0.01) | 0.05 No Relaxation |
| 25. | Aluminium | mg/L | BDL(DL 0.02) | 0.03 0.2 |
| 26. | Selenium as Se | mg/L | BDL(DL 0.005) | 0.01 No Relaxation |
| 27. | Lead as Pb | mg/L | BDL(DL 0.01) | 0.01 No Relaxation |
| 28. | Mercury as Hg | mg/L | BDL(DL 0.001) | 0.001 No Relaxation |
| 29. | Nitrate Nitrogen NO ₃ | mg/L | BDL (0.1) | 45 No Relaxation |
| 30. | E.Coli | MPN/100mL | Nil | Shall not be detectable in any 100 mL sample |


Note:-BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Prepared by

Checked by

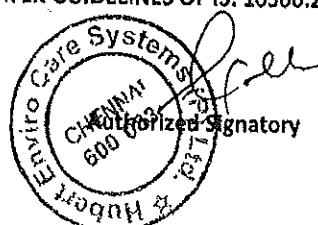

TEST REPORT

| Name of the Industry | M/s. Mangalore SEZ Limited | | | |
|-------------------------|---|-----------|---------------|--|
| Address of the Industry | 3 rd Floor, MUDA Building, Ashok Nagar, Urwa Stores, Mangalore- 575006 | | | |
| Sample Description | Non Processing Area(GW) | | | |
| Date of Sampling | 10.08.2017 | | | |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd | | | |
| Report Date | 11.09.2017 | | | |
| Report No | HECS/W/007/110917 | | | |
| Sl.No. | Parameters monitored | Units | Results | As per IS 10500:2012 standard limit |
| | | | | Acceptable (max) |
| 1. | Colour | Hazen | 1 (DL 1) | 5 15 |
| 2. | pH (at 25 °C) | - | 6.8 | 6.5-8.5 No Relaxation |
| 3. | Electrical Conductivity | µS/cm | 45 | Nil Nil |
| 4. | Odour | - | Agreeable | Agreeable |
| 5. | Taste | - | Agreeable | Agreeable |
| 6. | Turbidity | NTU | BDL (DL 0.1) | 1 5 |
| 7. | Total Dissolved Solids | mg/L | 29.3 | 500 2000 |
| 8. | Alkalinity as CaCO ₃ | mg/L | 10 | 200 600 |
| 9. | Total Hardness | mg/L | 14 | 200 600 |
| 10. | Calcium as Ca | mg/L | 4 | 75 200 |
| 11. | Magnesium as Mg | mg/L | BDL (DL 0.1) | 30 100 |
| 12. | Iron as Fe | mg/L | BDL(DL 0.02) | 0.3 No Relaxation |
| 13. | Sulphate as SO ₄ | mg/L | 3 | 200 400 |
| 14. | Chloride as Cl | mg/L | 13 | 250 1000 |
| 15. | Boron as B | mg/L | BDL(DL 0.1) | 0.5 1.0 |
| 16. | Residual free chlorine | mg/L | BDL (DL 0.1) | 0.2 1 |
| 17. | Fluoride | mg/L | 0.27 | 1.0 1.5 |
| 18. | Phenolic Compounds | mg/L | BDL(DL 0.001) | 0.001 0.002 |
| 19. | Manganese as Mn | mg/L | BDL(DL 0.01) | 0.1 0.3 |
| 20. | Zinc as Zn | mg/L | BDL(DL 0.01) | 5 15 |
| 21. | Arsenic as As | mg/L | BDL(DL 0.005) | 0.01 0.05 |
| 22. | Cyanide as CN | mg/L | BDL (DL 0.01) | 0.05 No Relaxation |
| 23. | Cadmium as Cd | mg/L | BDL(DL 0.01) | 0.003 No Relaxation |
| 24. | Chromium as Cr | mg/L | BDL(DL 0.01) | 0.05 No Relaxation |
| 25. | Aluminium | mg/L | BDL(DL 0.02) | 0.03 0.2 |
| 26. | Selenium as Se | mg/L | BDL(DL 0.005) | 0.01 No Relaxation |
| 27. | Lead as Pb | mg/L | BDL(DL 0.01) | 0.01 No Relaxation |
| 28. | Mercury as Hg | mg/L | BDL(DL 0.001) | 0.001 No Relaxation |
| 29. | Nitrate Nitrogen NO ₃ | mg/L | 0.4 | 45 No Relaxation |
| 30. | E.Coli | MPN/100mL | Nil | Shall not be detectable in any 100 mL sample |


Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Prepared by

Sksha
Checked by

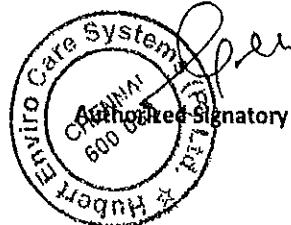

TEST REPORT

| | |
|-------------------------|---|
| Name of the Industry | M/s. Mangalore SEZ Limited |
| Address of the Industry | 3 rd Floor, MUDA Building, Ashok Nagar, Urwa Stores, Mangalore- 575006 |
| Sample Description | Permude Bajpe Village Boundary (GW) |
| Date of Sampling | 10.08.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 11.09.2017 |
| Report No | HECS/W/008/110917 |

| Sl.No. | Parameters monitored | Units | Results | As per IS 10500:2012 standard limit | |
|--------|----------------------------------|-----------|---------------|--|-------------------|
| | | | | Acceptable (max) | Permissible (max) |
| 1. | Colour | Hazen | 1 (DL 1) | 5 | 15 |
| 2. | pH (at 25 °C) | - | 6.6 | 6.5-8.5 | No Relaxation |
| 3. | Electrical Conductivity | µS/cm | 39 | Nil | Nil |
| 4. | Odour | - | Agreeable | Agreeable | Agreeable |
| 5. | Taste | - | Agreeable | Agreeable | Agreeable |
| 6. | Turbidity | NTU | BDL(DL 0.1) | 1 | 5 |
| 7. | Total Dissolved Solids | mg/L | 25.4 | 500 | 2000 |
| 8. | Alkalinity as CaCO ₃ | mg/L | 9.7 | 200 | 600 |
| 9. | Total Hardness | mg/L | 12.5 | 200 | 600 |
| 10. | Calcium as Ca | mg/L | 3.8 | 75 | 200 |
| 11. | Magnesium as Mg | mg/L | 2.4 | 30 | 100 |
| 12. | Iron as Fe | mg/L | BDL(DL 0.02) | 0.3 | No Relaxation |
| 13. | Sulphate as SO ₄ | mg/L | 6.5 | 200 | 400 |
| 14. | Chloride as Cl | mg/L | 10 | 250 | 1000 |
| 15. | Boron as B | mg/L | BDL(DL 0.1) | 0.5 | 1.0 |
| 16. | Residual free chlorine | mg/L | BDL(DL 0.1) | 0.2 | 1 |
| 17. | Fluoride | mg/L | 0.25 | 1.0 | 1.5 |
| 18. | Phenolic Compounds | mg/L | BDL(DL 0.001) | 0.001 | 0.002 |
| 19. | Manganese as Mn | mg/L | BDL(DL 0.01) | 0.1 | 0.3 |
| 20. | Zinc as Zn | mg/L | BDL(DL 0.01) | 5 | 15 |
| 21. | Arsenic as As | mg/L | BDL(DL 0.005) | 0.01 | 0.05 |
| 22. | Cyanide as CN | mg/L | BDL(DL 0.01) | 0.05 | No Relaxation |
| 23. | Cadmium as Cd | mg/L | BDL(DL 0.01) | 0.003 | No Relaxation |
| 24. | Chromium as Cr | mg/L | BDL(DL 0.01) | 0.05 | No Relaxation |
| 25. | Aluminium | mg/L | BDL(DL 0.02) | 0.03 | 0.2 |
| 26. | Selenium as Se | mg/L | BDL(DL 0.005) | 0.01 | No Relaxation |
| 27. | Lead as Pb | mg/L | BDL(DL 0.01) | 0.01 | No Relaxation |
| 28. | Mercury as Hg | mg/L | BDL(DL 0.001) | 0.001 | No Relaxation |
| 29. | Nitrate Nitrogen NO ₃ | mg/L | 0.36 | 45 | No Relaxation |
| 30. | E.Coli | MPN/100mL | Nil | Shall not be detectable in any 100 mL sample | |


Note:-BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L- Milligrams per Liter; MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Prepared by

Checked by



TEST REPORT

| | | | |
|-------------------------|---|--|--|
| Name of the Industry | M/s. Mangalore SEZ Limited | | |
| Address of the Industry | 3 rd Floor, MUDA Building, Ashok Nagar, Urwa Stores, Mangalore- 575006 | | |
| Sample Description | Kalavar | | |
| Date of Sampling | 10.08.2017 | | |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd | | |
| Report Date | 11.09.2017 | | |
| Report No | HECS/W/009/110917 | | |

| Sl.No. | Parameters monitored | Units | Results | As per IS 10500:2012 standard limit | |
|--------|----------------------------------|-----------|---------------|--|-------------------|
| | | | | Acceptable (max) | Permissible (max) |
| 1. | Colour | Hazen | 1 (DL 1) | 5 | 15 |
| 2. | pH (at 25 °C) | - | 6.8 | 6.5-8.5 | No Relaxation |
| 3. | Electrical Conductivity | µS/cm | 60 | Nil | Nil |
| 4. | Odour | - | Agreeable | Agreeable | Agreeable |
| 5. | Taste | - | Agreeable | Agreeable | Agreeable |
| 6. | Turbidity | NTU | BDL (DL 0.1) | 1 | 5 |
| 7. | Total Dissolved Solids | mg/L | 39 | 500 | 2000 |
| 8. | Alkalinity as CaCO ₃ | mg/L | 22 | 200 | 600 |
| 9. | Total Hardness | mg/L | 30 | 200 | 600 |
| 10. | Calcium as Ca | mg/L | 9.6 | 75 | 200 |
| 11. | Magnesium as Mg | mg/L | 1.5 | 30 | 100 |
| 12. | Iron as Fe | mg/L | BDL(DL 0.02) | 0.3 | No Relaxation |
| 13. | Sulphate as SO ₄ | mg/L | 2.5 | 200 | 400 |
| 14. | Chloride as Cl | mg/L | 10 | 250 | 1000 |
| 15. | Boron as B | mg/L | BDL(DL 0.1) | 0.5 | 1.0 |
| 16. | Residual free chlorine | mg/L | BDL (DL 0.1) | 0.2 | 1 |
| 17. | Fluoride | mg/L | 0.24 | 1.0 | 1.5 |
| 18. | Phenolic Compounds | mg/L | BDL(DL 0.001) | 0.001 | 0.002 |
| 19. | Manganese as Mn | mg/L | BDL(DL 0.01) | 0.1 | 0.3 |
| 20. | Zinc as Zn | mg/L | BDL(DL 0.01) | 5 | 15 |
| 21. | Arsenic as As | mg/L | BDL(DL 0.005) | 0.01 | 0.05 |
| 22. | Cyanide as CN | mg/L | BDL (DL 0.01) | 0.05 | No Relaxation |
| 23. | Cadmium as Cd | mg/L | BDL(DL 0.01) | 0.003 | No Relaxation |
| 24. | Chromium as Cr | mg/L | BDL(DL 0.01) | 0.05 | No Relaxation |
| 25. | Aluminium | mg/L | BDL(DL 0.02) | 0.03 | 0.2 |
| 26. | Selenium as Se | mg/L | BDL(DL 0.005) | 0.01 | No Relaxation |
| 27. | Lead as Pb | mg/L | BDL(DL 0.01) | 0.01 | No Relaxation |
| 28. | Mercury as Hg | mg/L | BDL(DL 0.001) | 0.001 | No Relaxation |
| 29. | Nitrate Nitrogen NO ₃ | mg/L | 0.01 | 45 | No Relaxation |
| 30. | E.Coli | MPN/100mL | Nil | Shall not be detectable in any 100 mL sample | |


Note:-BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Prepared by

Sk/tp
Checked by



TEST REPORT

| Name of the Industry | M/s. Mangalore SEZ Limited | | | |
|-------------------------|---|-----------|---------------|--|
| Address of the Industry | 3 rd Floor, MUDA Building, Ashok Nagar, Urwa Stores, Mangalore- 575006 | | | |
| Sample Description | 10 ml water Reservoir | | | |
| Date of Sampling | 10.08.2017 | | | |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd | | | |
| Report Date | 11.09.2017 | | | |
| Report No | HECS/W/009/110917 | | | |
| Sl.No. | Parameters monitored | Units | Results | As per IS 10500:2012 standard limit |
| | | | | Acceptable (max) |
| 1. | Colour | Hazen | (DL 1) | 5 15 |
| 2. | pH (at 25 °C) | - | 6.8 | 6.5-8.5 No Relaxation |
| 3. | Electrical Conductivity | µS/cm | 122 | Nil Nil |
| 4. | Odour | - | Agreeable | Agreeable |
| 5. | Taste | - | Agreeable | Agreeable |
| 6. | Turbidity | NTU | 40.5 | 1 5 |
| 7. | Total Dissolved Solids | mg/L | 79.3 | 500 2000 |
| 8. | Alkalinity as CaCO ₃ | mg/L | 64 | 200 600 |
| 9. | Total Hardness | mg/L | 84 | 200 600 |
| 10. | Calcium as Ca | mg/L | 20 | 75 200 |
| 11. | Magnesium as Mg | mg/L | 8.5 | 30 100 |
| 12. | Iron as Fe | mg/L | BDL(DL 0.02) | 0.3 No Relaxation |
| 13. | Sulphate as SO ₄ | mg/L | 26 | 200 400 |
| 14. | Chloride as Cl | mg/L | 11 | 250 1000 |
| 15. | Boron as B | mg/L | BDL(DL 0.1) | 0.5 1.0 |
| 16. | Residual free chlorine | mg/L | BDL(DL 0.1) | 0.2 1 |
| 17. | Fluoride | mg/L | 0.23 | 1.0 1.5 |
| 18. | Phenolic Compounds | mg/L | BDL(DL 0.001) | 0.001 0.002 |
| 19. | Manganese as Mn | mg/L | BDL(DL 0.01) | 0.1 0.3 |
| 20. | Zinc as Zn | mg/L | BDL(DL 0.01) | 5 15 |
| 21. | Arsenic as As | mg/L | BDL(DL 0.005) | 0.01 0.05 |
| 22. | Cyanide as CN | mg/L | BDL(DL 0.01) | 0.05 No Relaxation |
| 23. | Cadmium as Cd | mg/L | BDL(DL 0.01) | 0.003 No Relaxation |
| 24. | Chromium as Cr | mg/L | BDL(DL 0.01) | 0.05 No Relaxation |
| 25. | Aluminum | mg/L | BDL(DL 0.02) | 0.03 0.2 |
| 26. | Selenium as Se | mg/L | BDL(DL 0.005) | 0.01 No Relaxation |
| 27. | Lead as Pb | mg/L | BDL(DL 0.01) | 0.01 No Relaxation |
| 28. | Mercury as Hg | mg/L | BDL(DL 0.001) | 0.001 No Relaxation |
| 29. | Nitrate Nitrogen NO ₃ | mg/L | 0.03 | 45 No Relaxation |
| 30. | E.Coli | MPN/100mL | Nil | Shall not be detectable in any 100 mL sample |


Note:-BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Prepared by

Checked by

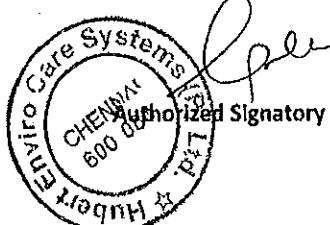

5. MONITORING SCHEDULE OF MANGALORE SEZ LIMITED
ENVIRONMENTAL MONITORING

| Sl.No | Environmental Attributes monitored | Parameters analyzed and presented in analysis Report | Monitoring requirement |
|-------|------------------------------------|--|---|
| 1 | Ambient Air Quality | PM _{2.5} , PM ₁₀ , SO ₂ , NO ₂ , CO, O ₃ , NH ₃ , Pb, As, Ni, Benzene, B(α)P | Two Locations/Month, 24 hrs/day |
| 2 | Surface/ Ground Water Quality | Colour, pH (at 25 °C), Odour, Taste, Turbidity, Total Dissolved Solids, Alkalinity as CaCO ₃ , Total Hardness, Calcium as Ca, Magnesium as Mg, Iron as Fe, Sulphate as SO ₄ , Chloride as Cl, Boron as B, Residual free chlorine, Fluoride, Phenolic Compounds, Carbon monoxide, Manganese as Mn, Zinc as Zn, Arsenic as As, Cyanide as CN, Cadmium as Cd, Chromium as Cr, Aluminium as Al, Selenium as Se, Lead as Pb, Mercury as Hg, Nitrate Nitrogen NO ₃ , E.Coli | Ten Locations, Seasons (Summer, Winter, Post monsoon), By using Grab Sampling technique |
| 3 | Ambient Noise Level | Noise Level (db) in Day and Night | Two Locations, Seasons (Summer, Winter, Post monsoon), Fortnightly interval |




MSEZ

Mangalore SEZ Limited

ENVIRONMENTAL MONITORING REPORT

AMBIENT AIR QUALITY MONITORING REPORT FOR THE MONTH OF SEPTEMBER 2017

Submitted to,

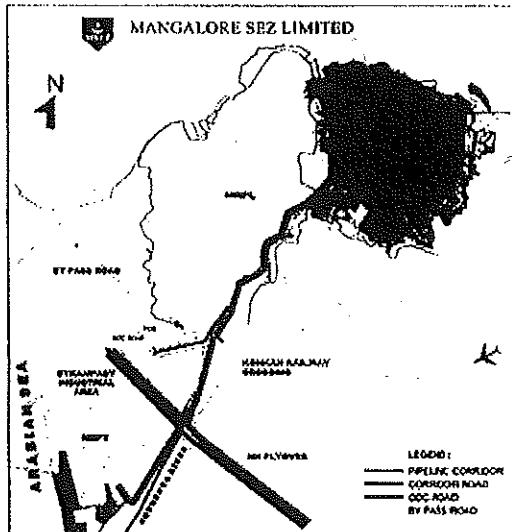

Submitted By

HECS

M/s Hubert Enviro Care Systems Private Limited

(NABL Accredited & MOEF Recognized Laboratory)

7/C-45, Baikampady Industrial Estate, Mangaluru, Karnataka - 575011

Email: krom@hecs.in; kro@hecs.in

INDEX

| | | |
|------------|---|--------------|
| 1 | Introduction - M SEZ | 1 |
| 2 | Environmental Monitoring | 1 |
| 3 | Scope and Methodology | 1-9 |
| 3.1 | Ambient Air Quality | 1-9 |
| 4 | Results | 10 |
| 4.1 | Ambient Air Quality | 10-11 |
| 5 | MSEZ Environmental Monitoring Schedule | 12 |
| 6 | Annexure | 13-16 |

AMBIENT AIR QUALITY MONITORING REPORT - SEPTEMBER 2017**1. INTRODUCTION**

Mangalore Special Economic Zone, known as MSEZ is spread across 1630 acres, located 15 km from Mangalore city, off Cochin-Mumbai NH 66, 5 km from Mangalore International Airport and 8 km from all-weather deep draft sea port, New Mangalore Port in Mangalore, Karnataka, India. MSEZ limited is jointly promoted by Oil and Natural Gas Corporation (ONGC), a fortune 500 company and infrastructure leasing & finance services, one of India's leading infrastructure development and finance companies, Karnataka Industrial Area Development Board (KIADB) and Kanara Chamber of Commerce and Industry (KCCI). A unique combination of Government entities, a large financial institution and an apex chamber brings in the expertise to develop MSEZL with world-class industrial infrastructure.

2. ENVIRONMENT MONITORING

Environmental monitoring is being carried out at Mangalore SEZ, following guidelines and regulations of MoEF/CPCB and KSPCB statutory norms. In this regard, MSEZL has awarded the work to M/s Hubert EnviroCare Systems Pvt Ltd. and to monitor air quality, water quality & noise level for the three years. As per work order, during September 2017, we have conducted ambient air quality monitoring at 2 locations.

3. SCOPE AND METHODOLOGY

The scope of work carried out and methodology adopted for the survey are described below:

3.1. Ambient Air Quality

Ambient air quality monitoring was carried out at each location on 24 hour basis on two consecutive days per month. The identified monitoring stations are: A₁-CETP & A₂-WTP Area. To assess the ambient air quality status, monitoring stations are identified on the basis of meteorology in the upwind and downwind direction as well as to represent the cross sectional scenario of the MSEZ. Based on the activities the parameters chosen for assessment of air quality are PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂-Sulphur dioxide; NO₂-Nitrogen-di-oxide; CO-Carbon Mono Oxide (DL 0.1 mg/m³); O₃-Ozone (DL 10 µg/m³); NH₃-Ammonia (DL 5 µg/m³); Pb-Lead (DL 0.05 µg/m³); As-Arsenic (DL 0.1 ng/m³); Ni- (DL 0.5 ng/m³); Benzene-(DL 1 µg/m³); B(a)P- Benzo-α-pyrene (DL 0.1 ng/m³) as per CPCB stipulation.

3.1.1. Sampling and analysis of PM_{2.5} and PM₁₀ in ambient air (Gravimetric Method)

- i. Condition a filter paper in oven (i.e. 10 or 2.5 μm diameter)
- ii. Prepare a sampling assembly by uncorking screws of the bracket
- iii. Take a tare (initial) weight of the filter paper (w_i , mg)
- iv. Place the filter in the sampling system securely and tighten the screws of the bracket
- v. Set the timer for the period of sampling
- vi. Start the sampler and adjust flow rate to about 2L/ min for 24 hrs sampling
- vii. Note the flow rate at the end of the desired sampling period and stop the sampler
- viii. Transit the sampling train to environmental laboratory carefully with scientific precautions
- ix. Condition the filter paper again for the same period as was done prior to sampling.

Laboratory analysis:

Weighing of exposed samples:

- i. Take final weight of the exposed filter with a standard balance (w_f , mg)

Calculations:

- i. Average flow rate (initial and final flow rates) in L/ min

$$= (\text{Initial flow rate} + \text{final flow rate}) / 2$$
- ii. Total vol. of air sampled (TVA) in m^3

$$= \text{Avg. flow rate (L/min)} * 10^{-3} (\text{m}^3/\text{L}) * \text{sampling time (hr)} * 60 (\text{min/hr})$$
- iii. Concentration of SPM in $\mu\text{g}/\text{m}^3$

$$= (w_f - w_i) (\text{mg}) / \text{TVA} (\text{m}^3) * 10^6 \mu\text{g}/\text{m}^3$$

3.1.2. Sampling and analysis of Sulphur dioxide

- i. Prepare absorbing reagent (sodium tetra-chloromercurate) by dissolving 27.2 g mercuric chloride and 11.7 g sodium chloride in 1 lit of water
- ii. Prepare a sampling train of at least 2 gas bubblers (for average reading) properly washed with distilled water and air dried.
- iii. Place bubblers in the sampling system securely connecting to the manifold. Check the connections of bubblers with the manifold and the inlet and outlet
- iv. Fill the bubblers with an absorbing reagent with an amount sufficient to last for 24 hours (approximately 15 ml for 8 hours sampling to 50 ml for 24 hours sampling)
- v. To eliminate interference of traces metals, if any, 1 drop of 0.01% EDTA solution may be added to the reagent prior to sampling; similarly, effect of oxide of nitrogen may also be eliminated by adding 1 ml of 0.06% sulphamic acid to the reagent at site
- vi. Start the sampler and adjust flow rate to 2 lit/ min.
- vii. Note the flow rate at the end of desired sampling period and stop the sampler
- viii. Transit the sampling train to environmental laboratory carefully with scientific precautions and preserve the sample tubes in a controlled environmental conditions

Laboratory analysis:**Calibration curve:**

- i. Prepare a standard solution of SO₂ concentrations ranging from 0 to 25 µg SO₂ by taking definite amount of std. sulphur dioxide solution in a 25 ml volumetric flasks
- ii. Add 14 ml of absorbing reagent and 1 ml of pararosaniline hydrochloride to each of the flasks making a total volume of 20 ml.
- iii. Measure absorbance for each flasks by spectrophotometer at 540 nm wavelength
- iv. Plot graph of absorbance v/s concentration

Absorbance in samples:

- i. Transfer samples to a 25 ml flask and develop colour as done in calibration curve
- ii. Measure absorbance at 540 nm
- iii. Find out the concentration (µgSO₂) corresponding to the measured absorbance from the calibration curve

Calculations:

- i. Average flow rate (if there is a significant difference in initial and final flow rates)
- ii. Total volume of air sampled (TVA) in m³
= Avg. flow rate (lit) * 10⁻³ (m³/lit) * sampling time (hr) * 60 (min/hr)
- iii. µgSO₂/TVA

3.1.3. Sampling and analysis of Nitrogen-di-oxide

- i. Prepare absorbing reagent (a solution of sodium hydroxide and arsenite) by dissolving 4 g sodium hydroxide and 1 g of sodium arsenite in 1 lit of distilled water
- ii. Prepare a sampling train of at least 2 gas bubblers(for average reading) properly washed with distilled water and air dried .
- iii. Place bubblers in the sampling system securely connecting to the manifold. Check the connections of bubblers with the manifold and the inlet and outlet
- iv. Fill the bubblers with an absorbing reagent with an amount sufficient to last for 24 hours (approximately 15 ml for 8 hours sampling to 50 ml for hours sampling)
- v. To eliminate interference of sulphur dioxide , drop of hydrogen peroxide may be added to the reagents to convert sulphur dioxide into sulphate during analysis
- vi. Start the sampler and adjust flow rate to about 0.2 lit/ min for 24 hours sampling
- vii. Note the flow rate at the end of desired sampling period and stop the sampler
- viii. Transit the sampling train to environmental laboratory carefully with scientific precautions and preserve the sample tubes in a controlled environmental conditions

Laboratory analysis:**Calibration curve:**

- i. Prepare a standard solution of NO_x concentrations ranging from 0 to 25 µg SO₂ by taking definite amount of std. sulphur dioxide solution in a 25 ml volumetric flasks
- ii. Add 14 ml of absorbing reagent and 1 ml of pararosaniline hydrochloride to each of the flasks making a total volume of 20 ml.
- iii. Measure absorbance for each flasks by spectrophotometer at 540 nm wavelength
- iv. Plot graph of absorbance v/s concentration

Absorbance in samples:

- i. Transfer samples to a 25 ml flask and develop colour as done in calibration curve
- ii. Measure absorbance at 540 nm
- iii. Find out the concentration (µg NO_x) corresponding to the measured absorbance from the calibration curve

Calculations:

- i. Average flow rate (if there is a significant difference in initial and final flow rates)
- ii. Total volume of air sampled (TVA) in m³

$$\text{= Avg. flow rate (lit)} * 10^{-3} (\text{m}^3/\text{lit}) * \text{sampling time (hr)} * 60 (\text{min/hr})$$

$$\mu\text{gNO}_x/\text{TVA}$$

3.1.4. Sampling and analysis of Carbon Mono Oxide**Preparation of sample train:**

- i. Sampling begins with conditioning a sampling train and then gas analyzer
- ii. Pressure system is preferred to condition the sampling train by installing pump before the analyzer. Reducing valve needs to be fitted between the analyser and pump to eliminate the pulsing effect of pump on the analyzer
- iii. Flow meter is to be installed just before the analyzer
- iv. A fibre filter is used to capture the particulate matter prior to the optical cell to prevent its interference. As it often accumulates on the optical cell reducing the efficiency
- v. To eliminate the interference of water vapour ,refrigeration or desiccant with magnesium perchlorate may be used

Mode of operation:

- i. Continuous analysis is carried out at the flow rate of about 100 ml/min to 1000 ml/min (depending upon the level of pollution near the location) for the desired sampling period

- ii. Discrete sampling may also be possible with Infra red analyzer. It however requires proper cleaning of the sampling train.

Steps:

- i. Calibration of analyzer can be carried out if required using standard gases
- ii. Sampler is allowed to warm up for some time before actual readings are taken till the sampler gives steady response and temperature stability

3.1.5. Sampling and analysis of Ozone**Dynamic calibration:**

- i. Dynamic calibration may be performed by preparing a large mixture of ozone in air
- ii. The output of an ozonizer is fed into the intake of a small blower delivering air. The mixture of gas however emerges through a short length of pipe
- iii. One portion of this mixture is analyzed in the recorder.
- iv. Another portion is analyzed through a faintly blue iodine solution containing starch and potassium iodide.
- v. Titrated this solution with sodium thiosulphate(0.1N)
- vi. The end point established by comparison with the blue starch- iodine solution
- vii. Mixture of ozone and air in polyester film bag may be prepared and admitted to the analyzer.
- viii. The mixture is analyzed at the time it is used since the ozone decomposes gradually
- ix. Analysis is then performed by passing a measured volume through an impinge containing buffered KI solution and determined the released iodine by spectrometer method
- x. Make the second mixture about midscale concentration and adjust sample or reagent flow rates until the recorder reading agrees with the absorbance scale according to the analytically determined concentration of ozone
- xi. Check several other points on the curve if desired and liner or logarithmic chart may be prepared followed by a calibration curve to read in ppm

Laboratory analysis:**Calibration curve:**

- i. Plot graph of absorbance v/s concentration

Procedure:

- i. Place a fresh absorbent solution in the storage bottle and operate the solution pump until the liquid are full
- ii. After the flow has stabilized itself, zero the recorder and start the air pump
- iii. Set the flow at convenient rates such as 4 ml/ min of solution and 4 l/min of air
- iv. Check and adjust the flow rates daily.
- v. Adjust the pH of the solution once or twice a week ,at time the solution shall be brought up to volume by addition of distilled water
- vi. Change the carbon filter about once a month. Also change the absorbing solution at the same time

3.1.6. Sampling and analysis of Ammonia:

Ammonia is collected in dilute Sulphuric acid solution in midget impingers to form Ammonium Sulphate. The solution is treated with Nesselers reagent to produce a yellow brown complex. The Ammonia concentration is determined by reading the absorption of the complex at 440 nm and comparing with a standard curve.

3.1.7. Sampling and analysis of Lead, Nickel, Arsenic:

1. Sampling procedure:

Tilt back the inlet and secure it according to manufacturer's instructions. Loosen the face-plate wing-nuts and remove the face plate. Remove the filter from its jacket and centre it on the support screen with the rough side of the filter facing upwards. Replace the face-plate and tighten the wing-nuts to secure the rubber gasket against the filter edge. Gently lower the inlet. For automatically flow-controlled units, record the designated flow rate on the data sheet. Record the reading of the elapsed time meter. The specified length of sampling is commonly 8 hours or 24 hours. During this period, several reading (hourly) of flow rate should be taken. After the required time of sampling, record the flow meter reading and take out the filter media from the sampler and put in a container or envelope

2. Analysis:

i. Hot plate procedure:

Cut a 1" x 8" strip or half the filter from the 8" x 10" filter using a stainless steel pizza cutter. Place the filter in a beaker using vinyl gloves or plastic forceps. Cover the filter with the extraction solution (3% HNO₃ & 8% HCl). Place beaker on the hotplate, contained in a fume hood, and reflux gently while covered with a watch glass for 30 min. Do not allow sample to dry. Remove the beakers from the hot-plate and allow to cool. Rinse the beaker walls and wash with distilled water. Add approximately 10 mL reagent water to the remaining filter material in the beaker and allow to stand for at least 30 min. Transfer the extraction fluid in the beaker to a 100 mL volumetric flask or other graduated vessel. Rinse the beaker and any remaining solid material with distilled water and add the rinses to the flask. Dilute to the mark with distilled water (Type I) water and shake. The final extraction solution concentration is 3 % HNO₃/8% HCl. The filtered sample is now ready for analysis

2.1. Analysis of samples:

i. Instrument / Equipment:

A light beam containing the corresponding wavelength of the energy required to raise the atoms of the analyte from the ground state to the excited state is directed through the flame or furnace. This wavelength is observed by a monochromator and a detector that measure the amount of light absorbed by the element, hence the number of atoms in the ground state in the flame or furnace. A hollow cathode lamp for the element being determined provides a source of that metal's particular absorption wavelength. The method describes both flame atomic absorption (FAA) spectroscopy and graphite furnace atomic absorption (GFAA) spectroscopy. Atomic Absorption Spectrophotometer - analyze the metals by Flame, If results are below detection limit then go for GTA. Arsenic is analyzed by Flame – VGA.

ii. Flame Procedure:

Set the atomic absorption spectrophotometer for the standard condition as follows: choose the correct hollow cathode lamp, align the instrument, position the monochromator at the value recommended by the manufacturer, select the proper monochromator slit width, set the light source current, ignite the flame, regulate the flow of fuel and oxidant, adjust the burner for maximum absorption and stability and balance the meter. Run a series of standards of the metal of interest and construct a calibration curve. Aspirate the blanks and samples. Dilute samples that exceed the calibration range. For Lead (Pb) and Nickel (Ni), the wavelength required for analysis is 217nm and 232nm respectively. Where as in case of Arsenic (As), the VGA should attach with Flame and the wavelength required for analysis is 193.7nm.

3. Calibration:

Prepare standard solutions from the stock solutions. Select at least three standards to cover linear range as recommended by method. Aspirate the standards into the flame or inject the standards into the furnace and record the absorbance. Prepare the calibration graph by plotting absorbance and concentration in $\mu\text{g}/\text{ml}$.

i. Preparation of Standards:

For each metal that is to be determined, standards of known concentration must be acquired commercially certified standards.

ii. Standard Curve:

Standard curve is prepared by using standard solutions of known concentration.

4. Calculations:**i. Sample Air Volume:**

Sample air volume can be calculated by using the following equation:

$$V = (Q) (t)$$

Where,

V = volume of air, m^3

Q = average sampling rate, m^3/min .

t = time in minutes.

ii. Metal Concentration:

$$C = (Ms - Mb) \times Vs \times Fa / V \times Ft$$

Where,

C = concentration, $\mu\text{g metal}/\text{m}^3$

Ms = metal concentration $\mu\text{g}/\text{mL}$

Mb = blank concentration $\mu\text{g}/\text{mL}$

Vs = total volume of extraction in mL

Fa = total area of exposed filter in cm^2

V = Volume of air sampled in m^3

Ft = Area of filter taken for digestion in cm^2

3.1.8. Sampling and analysis of Benzo-a-pyrene:

Benzo (a) Pyrene (BaP) is one of the most important constituent of PAH compounds and also one of the most potent carcinogens. This can be measured in both particulate phase and vapour phase. In the vapour phase the concentration of B(a)P is significantly less than the particulate phase. Therefore, more care to be taken for the measurement of Benzo (a) Pyrene in the particulate phase. The molecular formula of B(a)P is C₂₀H₁₂ having molecular weight 252.

It is based on BIS method IS 5182 (Part 12):2004 and USEPA method (TO-13). This method is designed to collect particulate phase PAHs in ambient air and fugitive emissions and to determine individual PAH compounds using capillary gas chromatograph equipped with flame ionization detector. It is a high volume (1.2m³/min) sampling method capable of detecting sub.ng/m³ concentration of PAH in 24 hours sample (i.e. collected in 3 shifts of 8 hour each with 480 m³ sampling volume of air).

i. Sampling:

i. Instrument/Filter Selection:

24 hr. sampling using PM₁₀ high volume sampler with 8 hourly samples using EPM-2000 glass fibre or equivalent filter

ii. Sample Processing

a. Extraction:

Filter papers (half of all the filters papers collected in a day) are cut into strips using scissors and transfer to 250 ml beaker. Add ~50 ml. of Toluene (GC/HPLC grade). These samples are extracted with toluene using ultra sonic sample can be extracted using soxhlet bath for about 30 minutes. Repeat the procedure twice (50ml x 2 times) for complete extraction. Alternatively, extraction apparatus for about 8 hr. with Toluene and repeat it twice.

b. Filtration:

Filter the extracted samples with Whatman filter paper No. 41 containing 2 gm of Anhydrous Sodium Sulphate (to remove moisture).

c. Concentration:

After filtration, the filtrate is concentrated using Rotary vacuum evaporator to 2ml final volume.

d. Clean-up with silica Gel:

To clean up the impurities, pass 2 ml of concentrated sample through silica gel column (pre conditioned, 60-80 mesh, and 200-250mmx10 mm with Teflon stopcock). After cleaning add 5ml cyclohexane and collect the elute in 25 ml beaker. Repeat the process for at least 3 times and collect it in the same beaker. Alternatively Solid Phase Extraction (SPE) may be used for clean up the impurities of sample.

e. Re-concentration with rotary vacuum evaporator:

The Cleaned up extract/filtrate (approximately 17 ml) is further concentrated using rotary evaporator and it is evaporated to nearly dryness with Nitrogen.

f. Final Sample volume:

The dried sample is re-dissolved in 1ml of toluene and transfer into 4 or 5 ml amber vials final analysis.

ii. Calculations:

Calculate the concentration in ng/ μ l of each identified analyte or B(a)P in the sample extract (Cs) as follows:
Calculate the air volume from the periodic flow reading taken during sampling using the following equation:

$$V = Q \times T$$

Where,

Q = Average flow rate of sampling m³/min

T = sampling time, in min.

V = total sample volume at ambient conditions in m³

Concentration of analyte i.e B(a)P:

The concentration of PAH compound or Benzo(a)pyrene in ng /m³ in the air sampled is given by:

$$C (\text{ng} / \text{m}^3) = Cs * Ve / Vi * Vs$$

Where,

Cs : Concentration of Benzo (a) pyrene in ng / μl in the sample extract recorded by GC.

Ve : Final volume of extract in μl (i.e 1000)

Vi : Injection Volume (i.e 1 μl)

Vs : Volume of air sample in m³

4.0 Results

4.1 Ambient Air Quality

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|---|
| Name of the Industry | M/s. Mangalore SEZ Limited |
| Address of the Industry | 3 rd Floor, MUDA Building, Ashok Nagar, Urwa Stores, Mangalore- 575006 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | CETP |
| Sampling Date | 13.09.2017 |
| Report Date | 13.10.2017 |
| Report No | HECS/AA/001/131017 |

CONSOLIDATED TEST RESULTS: SEPTEMBER 2017

| Parameter Monitored | NAAQ Standard, 2009 | Results |
|--|---------------------|---------|
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60* | 16 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100* | 53 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80* | 8 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80* | 13 |
| CO (mg/m^3) | 2** | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100** | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400* | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1* | BDL |
| As (ng/m^3) | 6*** | BDL |
| NI (ng/m^3) | 20*** | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 5*** | BDL |
| B(a)P (ng/m^3) | 1*** | BDL |

Note: * : 24 hours average; ** : 8 hours average; *** : Annual average

Note: BDL =Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂ Sulphur dioxide; NO₂ - Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³);O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$);NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$);As-Arsenic (DL 0.1 ng/m³);Ni-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(a)P- Benzo - α -pyrene (DL0.1 ng/m³); ng/m³: nanogram per cubic meter; $\mu\text{g}/\text{m}^3$ - microgram per cubic meter

CONCLUSION: All the parameters meet the NAAQ Standards, 2009

*****End of Report *****

Rekha
Sampled by

Rekha
Prepared by

Sathya
Checked by

Lalit
Enviro Care Systems
CETP, Chennai - 600 083
Authorized Signatory

TEST REPORT: AMBIENT AIR MONITORING (AAQ): SEPTEMBER 2017

| | |
|-------------------------|---|
| Name of the Industry | M/s. Mangalore SEZ Limited |
| Address of the Industry | 3 rd Floor, MUDA Building, Ashok Nagar, Urwa Stores, Mangalore- 575006 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | WTP |
| Sampling Date | 11.09.2017 |
| Report Date | 13.10.2017 |
| Report No | HECS/AA/002/131017 |


| Parameter Monitored | NAAQ Standard, 2009 | Results |
|--|---------------------|---------|
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60* | 15 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100* | 47 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80* | 14 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80* | 9 |
| CO (mg/m^3) | 2** | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100** | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400* | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1* | BDL |
| As (ng/m^3) | 6*** | BDL |
| Ni (ng/m^3) | 20*** | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 5*** | BDL |
| B(α)P (ng/m^3) | 1*** | BDL |


Note: *24 hours average; **8 hours average; ***Annual average


Note: BDL =Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂ Sulphur dioxide; NO₂ - Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³); O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$); NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$); As-Arsenic (DL 0.1 ng/m³); Ni-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(α)P- Benzo- α -pyrene (DL 0.1 ng/m³); ng/m³: nanogram per cubic meter; $\mu\text{g}/\text{m}^3$ - microgram per cubic meter

CONCLUSION: All the parameters meet the NAAQ Standards, 2009

*****End of Report *****


Sampled by


Prepared by


Checked by



**5. MONITORING SCHEDULE OF MANGALORE SEZ LIMITED
ENVIRONMENTAL MONITORING**

| Sl.No | Environmental Attributes monitored | Parameters analyzed and presented in analysis Report | Monitoring requirement |
|-------|------------------------------------|--|---|
| 1 | Ambient Air Quality | PM _{2.5} , PM ₁₀ , SO ₂ , NO ₂ , CO, O ₃ , NH ₃ , Pb, As, Ni, Benzene, B(α)P | Two Locations/Month, 24 hrs/day |
| 2 | Surface/ Ground Water Quality | Colour, pH (at 25 °C), Odour, Taste, Turbidity, Total Dissolved Solids, Alkalinity as CaCO ₃ , Total Hardness, Calcium as Ca, Magnesium as Mg, Iron as Fe, Sulphate as SO ₄ , Chloride as Cl, Boron as B, Residual free chlorine, Fluoride, Phenolic Compounds, Carbon monoxide, Manganese as Mn, Zinc as Zn, Arsenic as As, Cyanide as CN, Cadmium as Cd, Chromium as Cr, Aluminium as Al, Selenium as Se, Lead as Pb, Mercury as Hg, Nitrate Nitrogen NO ₃ , E.Coli | Ten Locations, Seasons (Summer, Winter, Post monsoon), By using Grab Sampling technique |
| 3 | Ambient Noise Level | Noise Level (db) in Day and Night | Two Locations, Seasons (Summer, Winter, Post monsoon), Fortnightly Interval |




Mangalore SEZ Limited

Vijayalakshmi Cheddisingh
Smt. Ph. J. S.
12/11/18

ENVIRONMENTAL MONITORING REPORT

AMBIENT AIR QUALITY MONITORING REPORT FOR THE MONTH OF OCTOBER 2017

Submitted to

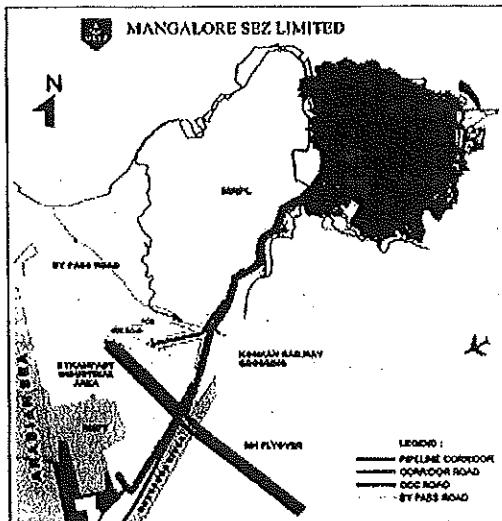


Submitted By



M/s Hubert Enviro Care Systems Private Limited
(NABL Accredited & MOEF Recognized Laboratory)
7/C-45, Balkampady Industrial Estate, Mangaluru, Karnataka - 575011
Email: krom@hecs.in; kro@hecs.in

INDEX

| | | |
|-----|--|-------|
| 1 | Introduction - M SEZ | 1 |
| 2 | Environmental Monitoring | 1 |
| 3 | Scope and Methodology | 1-9 |
| 3.1 | Ambient Air Quality | 1-9 |
| 4 | Results | 10 |
| 4.1 | Ambient Air Quality | 10-11 |
| 5 | MSEZ Environmental Monitoring Schedule | 12 |
| 6 | Annexure | 13-16 |

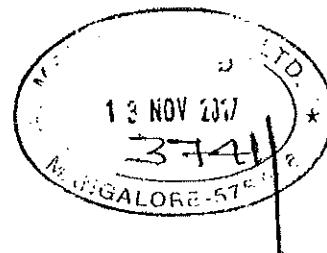

13/11/17

AMBIENT AIR QUALITY MONITORING REPORT - OCTOBER 2017

1. INTRODUCTION

Mangalore Special Economic Zone, known as MSEZ is spread across 1630 acres, located 15 km from Mangalore city, off Cochin-Mumbai NH 66, 5 km from Mangalore International Airport and 8 km from all-weather deep draft sea port, New Mangalore Port in Mangalore, Karnataka, India. MSEZ limited is jointly promoted by Oil and Natural Gas Corporation (ONGC), a fortune 500 company and infrastructure leasing & finance services, one of India's leading infrastructure development and finance companies, Karnataka Industrial Area Development Board (KIADB) and Kanara Chamber of Commerce and Industry (KCCI). A unique combination of Government entities, a large financial institution and an apex chamber brings in the expertise to develop MSEZL with world-class industrial infrastructure.

2. ENVIRONMENT MONITORING

Environmental monitoring is being carried out at Mangalore SEZ, following guidelines and regulations of MoEF/CPCB and KSPCB statutory norms. In this regard, MSEZL has awarded the work to M/s Hubert EnviroCare Systems Pvt Ltd. and to monitor air quality, water quality & noise level for the three years. As per work order, during OCTOBER 2017, we have conducted ambient air quality monitoring at 2 locations.

3. SCOPE AND METHODOLOGY

The scope of work carried out and methodology adopted for the survey are described below:

3.1. Ambient Air Quality

Ambient air quality monitoring was carried out at each location on 24 hour basis on two consecutive days per month. The identified monitoring stations are: A₁-CETP & A₂-WTP Area. To assess the ambient air quality status, monitoring stations are identified on the basis of meteorology in the upwind and downwind direction as well as to represent the cross sectional scenario of the MSEZ. Based on the activities the parameters chosen for assessment of air quality are PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂-Sulphur dioxide; NO₂-Nitrogen-di-oxide; CO-Carbon Mono Oxide (DL 0.1 mg/m³); O₃-Ozone (DL 10 µg/m³); NH₃-Ammonia (DL 5 µg/m³); Pb-Lead (DL 0.05 µg/m³); As-Arsenic (DL 0.1 ng/m³); Ni-(DL 0.5 ng/m³); Benzene-(DL 1 µg/m³); B(α)P- Benzo-α-pyrene (DL 0.1 ng/m³) as per CPCB stipulation.

3.1.1. Sampling and analysis of PM_{2.5} and PM₁₀ in ambient air (Gravimetric Method)

- i. Condition a filter paper in oven (i.e. 10 or 2.5 μm diameter)
- ii. Prepare a sampling assembly by uncorking screws of the bracket
- iii. Take a tare (initial) weight of the filter paper (w_i , mg)
- iv. Place the filter in the sampling system securely and tighten the screws of the bracket
- v. Set the timer for the period of sampling
- vi. Start the sampler and adjust flow rate to about 2L/ min for 24 hrs sampling
- vii. Note the flow rate at the end of the desired sampling period and stop the sampler
- viii. Transit the sampling train to environmental laboratory carefully with scientific precautions
- ix. Condition the filter paper again for the same period as was done prior to sampling.

Laboratory analysis:

Weighing of exposed samples:

- i. Take final weight of the exposed filter with a standard balance (w_f , mg)

Calculations:

- i. Average flow rate (initial and final flow rates) in L/ min

$$= (\text{Initial flow rate} + \text{final flow rate}) / 2$$
- ii. Total vol. of air sampled (TVA) in m^3

$$= \text{Avg. flow rate (L/min)} * 10^{-3} (\text{m}^3/\text{L}) * \text{sampling time (hr)} * 60 (\text{min/hr})$$
- iii. Concentration of SPM in $\mu\text{g}/\text{m}^3$

$$= (w_f - w_i) (\text{mg}) / \text{TVA} (\text{m}^3) * 10^6 \mu\text{g}/\text{m}^3$$

3.1.2. Sampling and analysis of Sulphur dioxide

- i. Prepare absorbing reagent (sodium tetra-chloromercurate) by dissolving 27.2 g mercuric chloride and 11.7 g sodium chloride in 1 lit of water
- ii. Prepare a sampling train of at least 2 gas bubblers (for average reading) properly washed with distilled water and air dried.
- iii. Place bubblers in the sampling system securely connecting to the manifold. Check the connections of bubblers with the manifold and the inlet and outlet
- iv. Fill the bubblers with an absorbing reagent with an amount sufficient to last for 24 hours (approximately 15 ml for 8 hours sampling to 50 ml for 24 hours sampling)
- v. To eliminate interference of traces metals, if any ,1 drop of 0.01% EDTA solution may be added to the reagent prior to sampling ;similarly, effect of oxide of nitrogen may also be eliminated by adding 1 ml of 0.06% sulphamic acid to the reagent at site
- vi. Start the sampler and adjust flow rate to 2 lit/ min.
- vii. Note the flow rate at the end of desired sampling period and stop the sampler
- viii. Transit the sampling train to environmental laboratory carefully with scientific precautions and preserve the sample tubes in a controlled environmental conditions

Laboratory analysis:**Calibration curve:**

- i. Prepare a standard solution of SO₂ concentrations ranging from 0 to 25 µg SO₂ by taking definite amount of std. sulphur dioxide solution in a 25 ml volumetric flasks
- ii. Add 14 ml of absorbing reagent and 1 ml of pararosaniline hydrochloride to each of the flasks making a total volume of 20 ml.
- iii. Measure absorbance for each flasks by spectrophotometer at 540 nm wavelength
- iv. Plot graph of absorbance v/s concentration

Absorbance in samples:

- i. Transfer samples to a 25 ml flask and develop colour as done in calibration curve
- ii. Measure absorbance at 540 nm
- iii. Find out the concentration (µgSO₂) corresponding to the measured absorbance from the calibration curve

Calculations:

- i. Average flow rate (if there is a significant difference in initial and final flow rates)
- ii. Total volume of air sampled (TVA) in m³
= Avg. flow rate (lit/min) * 10⁻³ (m³/lit) * sampling time (hr) * 60 (min/hr)
- iii. µgSO₂/TVA

3.1.3. Sampling and analysis of Nitrogen-di-oxide

- i. Prepare absorbing reagent (a solution of sodium hydroxide and arsenite) by dissolving 4 g sodium hydroxide and 1 g of sodium arsenite in 1 lit of distilled water
- ii. Prepare a sampling train of at least 2 gas bubblers(for average reading) properly washed with distilled water and air dried .
- iii. Place bubblers in the sampling system securely connecting to the manifold. Check the connections of bubblers with the manifold and the inlet and outlet
- iv. Fill the bubblers with an absorbing reagent with an amount sufficient to last for 24 hours (approximately 15 ml for 8 hours sampling to 50 ml for 24 hours sampling)
- v. To eliminate interference of sulphur dioxide , drop of hydrogen peroxide may be added to the reagents to convert sulphur dioxide into sulphate during analysis
- vi. Start the sampler and adjust flow rate to about 0.2 lit/ min for 24 hours sampling
- vii. Note the flow rate at the end of desired sampling period and stop the sampler
- viii. Transit the sampling train to environmental laboratory carefully with scientific precautions and preserve the sample tubes in a controlled environmental conditions

Laboratory analysis:**Calibration curve:**

- i. Prepare a standard solution of NO_x concentrations ranging from 0 to 25 µg SO₂ by taking definite amount of std. sulphur dioxide solution in a 25 ml volumetric flasks
- ii. Add 14 ml of absorbing reagent and 1 ml of pararosaniline hydrochloride to each of the flasks making a total volume of 20 ml.
- iii. Measure absorbance for each flasks by spectrophotometer at 540 nm wavelength
- iv. Plot graph of absorbance v/s concentration

Absorbance in samples:

- i. Transfer samples to a 25 ml flask and develop colour as done in calibration curve
- ii. Measure absorbance at 540 nm
- iii. Find out the concentration (µg NO_x) corresponding to the measured absorbance from the calibration curve

Calculations:

- i. Average flow rate (if there is a significant difference in initial and final flow rates)
- ii. Total volume of air sampled (TVA) in m³

$$\text{= Avg. flow rate (lit)} * 10^{-3} \text{ (m}^3\text{/lit)} * \text{sampling time (hr)} * 60 \text{ (min/hr)}$$

$$\mu\text{gNO}_x/\text{TVA}$$

3.1.4. Sampling and analysis of Carbon Mono Oxide**Preparation of sample train:**

- i. Sampling begins with conditioning a sampling train and then gas analyzer
- ii. Pressure system is preferred to condition the sampling train by installing pump before the analyzer. Reducing valve needs to be fitted between the analyser and pump to eliminate the pulsing effect of pump on the analyzer
- iii. Flow meter is to be installed just before the analyzer
- iv. A fibre filter is used to capture the particulate matter prior to the optical cell to prevent its interference. As it often accumulates on the optical cell reducing the efficiency
- v. To eliminate the interference of water vapour ,refrigeration or desiccant with magnesium perchlorate may be used

Mode of operation:

- i. Continuous analysis is carried out at the flow rate of about 100 ml/min to 1000 ml/min (depending upon the level of pollution near the location) for the desired sampling period

- ii. Discrete sampling may also be possible with infra red analyzer. It however requires proper cleaning of the sampling train.

Steps:

- i. Calibration of analyzer can be carried out if required using standard gases
- ii. Sampler is allowed to warm up for some time before actual readings are taken till the sampler gives steady response and temperature stability

3.1.5. Sampling and analysis of Ozone**Dynamic calibration:**

- i. Dynamic calibration may be performed by preparing a large mixture of ozone in air
- ii. The output of an ozonizer is fed into the intake of a small blower delivering air. The mixture of gas however emerges through a short length of pipe
- iii. One portion of this mixture is analyzed in the recorder.
- iv. Another portion is analyzed through a faintly blue iodine solution containing starch and potassium iodide.
- v. Titrated this solution with sodium thiosulphate(0.1N)
- vi. The end point established by comparison with the blue starch- iodine solution
- vii. Mixture of ozone and air in polyester film bag may be prepared and admitted to the analyzer.
- viii. The mixture is analyzed at the time it is used since the ozone decomposes gradually
- ix. Analysis is then performed by passing a measured volume through an impinge containing buffered KI solution and determined the released Iodine by spectrometer method
- x. Make the second mixture about midscale concentration and adjust sample or reagent flow rates until the recorder reading agrees with the absorbance scale according to the analytically determined concentration of ozone
- xi. Check several other points on the curve if desired and liner or logarithmic chart may be prepared followed by a calibration curve to read in ppm

Laboratory analysis:**Calibration curve:**

- i. Plot graph of absorbance v/s concentration

Procedure:

- i. Place a fresh absorbent solution in the storage bottle and operate the solution pump until the liquid are full
- ii. After the flow has stabilized itself, zero the recorder and start the air pump
- iii. Set the flow at convenient rates such as 4 ml/ min of solution and 4 l/min of air
- iv. Check and adjust the flow rates daily.
- v. Adjust the pH of the solution once or twice a week ,at time the solution shall be brought up to volume by addition of distilled water
- vi. Change the carbon filter about once a month. Also change the absorbing solution at the same time

3.1.6. Sampling and analysis of Ammonia:

Ammonia is collected in dilute Sulphuric acid solution in midget impingers to form Ammonium Sulphate. The solution is treated with Nesselers reagent to produce a yellow brown complex. The Ammonia concentration is determined by reading the absorption of the complex at 440 nm and comparing with a standard curve.

3.1.7. Sampling and analysis of Lead, Nickel, Arsenic:

1. Sampling procedure:

Tilt back the inlet and secure it according to manufacturer's instructions. Loosen the face-plate wing-nuts and remove the face plate. Remove the filter from its jacket and centre it on the support screen with the rough side of the filter facing upwards. Replace the face-plate and tighten the wing-nuts to secure the rubber gasket against the filter edge. Gently lower the inlet. For automatically flow-controlled units, record the designated flow rate on the data sheet. Record the reading of the elapsed time meter. The specified length of sampling is commonly 8 hours or 24 hours. During this period, several reading (hourly) of flow rate should be taken. After the required time of sampling, record the flow meter reading and take out the filter media from the sampler and put in a container or envelope

2. Analysis:

i. Hot plate procedure:

Cut a 1" x 8" strip or half the filter from the 8" x 10" filter using a stainless steel pizza cutter. Place the filter in a beaker using vinyl gloves or plastic forceps. Cover the filter with the extraction solution (3% HNO₃ & 8% HCl). Place beaker on the hotplate, contained in a fume hood, and reflux gently while covered with a watch glass for 30 min. Do not allow sample to dry. Remove the beakers from the hot-plate and allow to cool. Rinse the beaker walls and wash with distilled water. Add approximately 10 mL reagent water to the remaining filter material in the beaker and allow to stand for at least 30 min. Transfer the extraction fluid in the beaker to a 100 mL volumetric flask or other graduated vessel. Rinse the beaker and any remaining solid material with distilled water and add the rinses to the flask. Dilute to the mark with distilled water (Type I) water and shake. The final extraction solution concentration is 3 % HNO₃/8% HCl. The filtered sample is now ready for analysis

2.1. Analysis of samples:

i. Instrument / Equipment:

A light beam containing the corresponding wavelength of the energy required to raise the atoms of the analyte from the ground state to the excited state is directed through the flame or furnace. This wavelength is observed by a monochromator and a detector that measure the amount of light absorbed by the element, hence the number of atoms in the ground state in the flame or furnace. A hollow cathode lamp for the element being determined provides a source of that metal's particular absorption wavelength. The method describes both flame atomic absorption (FAA) spectroscopy and graphite furnace atomic absorption (GFAA) spectroscopy. Atomic Absorption Spectrophotometer - analyze the metals by Flame, if results are below detection limit then go for GTA. Arsenic is analyzed by Flame – VGA.

ii. Flame Procedure:

Set the atomic absorption spectrophotometer for the standard condition as follows: choose the correct hollow cathode lamp, align the instrument, position the monochromator at the value recommended by the manufacturer, select the proper monochromator slit width, set the light source current, ignite the flame, regulate the flow of fuel and oxidant, adjust the burner for maximum absorption and stability and balance the meter. Run a series of standards of the metal of interest and construct a calibration curve. Aspirate the blanks and samples. Dilute samples that exceed the calibration range. For Lead (Pb) and Nickel (Ni), the wavelength required for analysis is 217nm and 232nm respectively. Where as in case of Arsenic (As), the VGA should attach with Flame and the wavelength required for analysis is 193.7nm.

3. Calibration:

Prepare standard solutions from the stock solutions. Select at least three standards to cover linear range as recommended by method. Aspirate the standards into the flame or inject the standards into the furnace and record the absorbance. Prepare the calibration graph by plotting absorbance and concentration in $\mu\text{g/ml}$.

i. Preparation of Standards:

For each metal that is to be determined, standards of known concentration must be acquired commercially certified standards.

ii. Standard Curve:

Standard curve is prepared by using standard solutions of known concentration.

4. Calculations:**i. Sample Air Volume:**

Sample air volume can be calculated by using the following equation:

$$V = (Q)(t)$$

Where,

V = volume of air, m^3

Q = average sampling rate, m^3/min .

t = time in minutes.

ii. Metal Concentration:

$$C = (Ms - Mb) \times Vs \times Fa / V \times Ft$$

Where,

C = concentration, $\mu\text{g metal}/\text{m}^3$

Ms = metal concentration $\mu\text{g/mL}$

Mb = blank concentration $\mu\text{g/mL}$

Vs = total volume of extraction in mL

Fa = total area of exposed filter in cm^2

V = Volume of air sampled in m^3

Ft = Area of filter taken for digestion in cm^2

3.1.8. Sampling and analysis of Benzo- α -pyrene:

Benzo (α) Pyrene (BaP) is one of the most important constituent of PAH compounds and also one of the most potent carcinogens. This can be measured in both particulate phase and vapour phase. In the vapour phase the concentration of B(a)P is significantly less than the particulate phase. Therefore, more care to be taken for the measurement of Benzo (α) Pyrene in the particulate phase. The molecular formula of B(a)P is C₂₀H₁₂ having molecular weight 252.

It is based on BIS method IS 5182 (Part 12):2004 and USEPA method (TO-13). This method is designed to collect particulate phase PAHs in ambient air and fugitive emissions and to determine individual PAH compounds using capillary gas chromatograph equipped with flame ionization detector. It is a high volume (1.2m³/min) sampling method capable of detecting sub.ng/m³ concentration of PAH in 24 hours sample (i.e. collected in 3 shifts of 8 hour each with 480 m³ sampling volume of air).

i. Sampling:

i. Instrument/Filter Selection:

24 hr. sampling using PM₁₀ high volume sampler with 8 hourly samples using EPM-2000 glass fibre or equivalent filter

ii. Sample Processing

a. Extraction:

Filter papers (half of all the filters papers collected in a day) are cut into strips using scissors and transfer to 250 ml beaker. Add ~50 ml. of Toluene (GC/HPLC grade). These samples are extracted with toluene using ultra sonic bath. The sample can be extracted using soxhlet bath for about 30 minutes. Repeat the procedure twice (50ml x 2 times) for complete extraction. Alternatively, extraction apparatus for about 8 hr. with Toluene and repeat it twice.

b. Filtration:

Filter the extracted samples with Whatman filter paper No. 41 containing 2 gm of Anhydrous Sodium Sulphate (to remove moisture).

c. Concentration:

After filtration, the filtrate is concentrated using Rotary vacuum evaporator to 2ml final volume.

d. Clean-up with silica Gel:

To clean up the Impurities, pass 2 ml of concentrated sample through silica gel column (pre conditioned, 60-80 mesh, and 200-250mmx10 mm with Teflon stopcock). After cleaning add 5ml cyclohexane and collect the elute in 25 ml beaker. Repeat the process for at least 3 times and collect it in the same beaker. Alternatively Solid Phase Extraction (SPE) may be used for clean up the impurities of sample.

e. Re-concentration with rotary vacuum evaporator:

The Cleaned up extract/filtrate (approximately 17 ml) is further concentrated using rotary evaporator and it is evaporated to nearly dryness with Nitrogen.

f. Final Sample volume:

The dried sample is re-dissolved in 1ml of toluene and transfer into 4 or 5 ml amber vials final analysis.

ii. Calculations:

Calculate the concentration in ng/ μ l of each identified analyte or B(a)P in the sample extract (Cs) as follows:

Calculate the air volume from the periodic flow reading taken during sampling using the following equation:

$$V = Q \times T$$

Where,

Q = Average flow rate of sampling m³/min

T = sampling time, in min.

V = total sample volume at ambient conditions in m³

Concentration of analyte i.e B(a)P:

The concentration of PAH compound or Benzo (a) pyrene in ng /m³ in the air sampled is given by:

$$C (\text{ng/m}^3) = Cs * Ve / Vi * Vs$$

Where,

Cs : Concentration of Benzo (a) pyrene in ng / μl in the sample extract recorded by GC.

Ve : Final volume of extract in μl (i.e 1000)

Vi : Injection Volume (i.e 1 μl)

Vs : Volume of air sample in m³

4.0 Results

4.1 Ambient Air Quality

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|---|
| Name of the Industry | M/s. Mangalore SEZ Limited |
| Address of the Industry | 3 rd Floor, MUDA Building, Ashok Nagar, Urwa Stores, Mangalore- 575006 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | CETP |
| Sampling Date | 27.10.2017 |
| Report Date | 07.11.2017 |
| Report No | HECS/AA/001/071117 |

CONSOLIDATED TEST RESULTS: OCTOBER 2017

| Parameter Monitored | NAAQ Standard, 2009 | Results |
|--|---------------------|---------|
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60* | 20 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100* | 59 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80* | 07 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80* | 12 |
| CO (mg/m^3) | 2** | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100** | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400* | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1* | BDL |
| As (ng/m^3) | 6*** | BDL |
| Ni (ng/m^3) | 20*** | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 5*** | BDL |
| B(a)P (ng/m^3) | 1*** | BDL |

Note: *: 24 hours average; **: 8 hours average; ***: Annual average

Note: BDL =Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂ Sulphur dioxide; NO₂ - Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³); O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$); NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$); As-Arsenic (DL 0.1 ng/m³); Ni-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(a)P- Benzo -a-pyrene (DL 0.1 ng/m³); ng/m³: nanogram per cubic meter; $\mu\text{g}/\text{m}^3$ - microgram per cubic meter

CONCLUSION: All the parameters meet the NAAQ Standards, 2009

*****End of Report *****


Sampled by


Prepared by


Checked by



TEST REPORT: AMBIENT AIR MONITORING (AAQ); OCTOBER 2017

| | |
|-------------------------|---|
| Name of the Industry | M/s. Mangalore SEZ Limited |
| Address of the Industry | 3 rd Floor, MUDA Building, Ashok Nagar, Urwa Stores, Mangalore- 575006 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | WTP |
| Sampling Date | 30.10.2017 |
| Report Date | 07.11.2017 |
| Report No | HECS/AA/002/071117 |

| Parameter Monitored | NAAQ Standard, 2009 | Results |
|--|---------------------|---------|
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60* | 18 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100* | 53 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80* | 09 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80* | 13 |
| CO (mg/m^3) | 2** | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100** | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400* | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1* | BDL |
| As (ng/m^3) | 6*** | BDL |
| Ni (ng/m^3) | 20*** | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 5*** | BDL |
| B(α)P (ng/m^3) | 1*** | BDL |

Note: * 24 hours average; ** 8 hours average; *** Annual average


Note: BDL =Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂ Sulphur dioxide; NO₂ - Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³); O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$); NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$); As-Arsenic (DL 0.1 ng/m³); Ni-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(α)P- Benzo- α -pyrene (DL0.1 ng/m³); ng/m³: nanogram per cubic meter; $\mu\text{g}/\text{m}^3$ - microgram per cubic meter

CONCLUSION: All the parameters meet the NAAQ Standards, 2009

*****End of Report *****


Sampled by


Prepared by


Checked by



5. MONITORING SCHEDULE OF MANGALORE SEZ LIMITED
ENVIRONMENTAL MONITORING

| Sl.No | Environmental Attributes monitored | Parameters analyzed and presented in analysis Report | Monitoring requirement |
|-------|------------------------------------|--|---|
| 1 | Ambient Air Quality | PM _{2.5} , PM ₁₀ , SO ₂ , NO ₂ , CO, O ₃ , NH ₃ , Pb, As, Ni, Benzene, B(α)P | Two Locations/Month, 24 hrs/day |
| 2 | Surface/ Ground Water Quality | Colour, pH (at 25 °C), Odour, Taste, Turbidity, Total Dissolved Solids, Alkalinity as CaCO ₃ , Total Hardness, Calcium as Ca, Magnesium as Mg, Iron as Fe, Sulphate as SO ₄ , Chloride as Cl, Boron as B, Residual free chlorine, Fluoride, Phenolic Compounds, Carbon monoxide, Manganese as Mn, Zinc as Zn, Arsenic as As, Cyanide as CN, Cadmium as Cd, Chromium as Cr, Aluminium as Al, Selenium as Se, Lead as Pb, Mercury as Hg, Nitrate Nitrogen NO ₃ , E.Coli | Ten Locations, Seasons (Summer, Winter, Post monsoon), By using Grab Sampling technique |
| 3 | Ambient Noise Level | Noise Level (db) in Day and Night | Two Locations, Seasons (Summer, Winter, Post monsoon), Fortnightly interval |




Mangalore SEZ Limited

ENVIRONMENTAL MONITORING REPORT

AMBIENT AIR QUALITY, WATER QUALITY AND NOISE LEVEL MONITORING
REPORT FOR THE MONTH OF NOVEMBER 2017

Submitted To

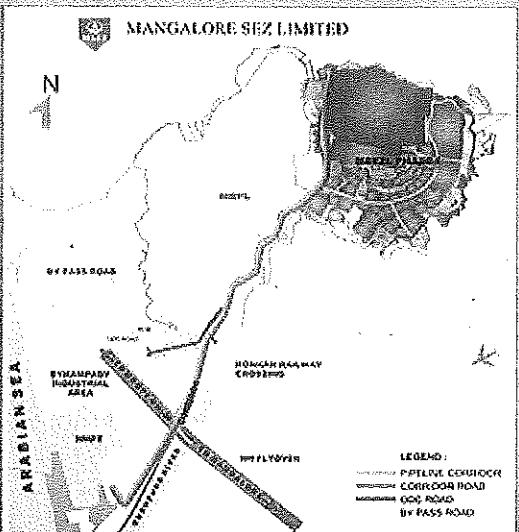

Submitted By



M/s Hubert Enviro Care Systems Private Limited

(NABL Accredited & MOEF Recognized Laboratory)

7/C-45, Baikampady Industrial Estate, Mangaluru, Karnataka - 575011

Email: krom@hecs.in; kro@hecs.in

INDEX

| Sl. No. | DESCRIPTION | Page No. |
|---------|---|--------------|
| 1 | Introduction - M SEZ | 1 |
| 2 | Environmental Monitoring | 1 |
| 3 | Scope and Methodology | 1-11 |
| 3.1 | Ambient Air Quality | 1-8 |
| 3.2 | Noise Level | 9-10 |
| 3.3 | Water Quality | 11 |
| 4 | Results | 12 |
| 4.1 | Ambient Air Quality | 12-13 |
| 4.2 | Noise Level | 14 |
| 4.3 | Water Quality | 15-23 |
| 5 | MSEZ Environmental Monitoring Schedule | 24 |
| 6 | Annexure | 26-28 |

AMBIENT AIR, WATER QUALITY AND NOISE MONITORING REPORT - NOVEMBER 2017

1. INTRODUCTION

Mangalore Special Economic Zone, known as MSEZ is spread across 1638 acres, located 15 km from Mangalore city, off Cochin-Mumbai NH 66, 5 km from Mangalore International Airport and 8 km from all-weather deep draft sea port, New Mangalore Port in Mangalore, Karnataka, India. MSEZ limited is jointly promoted by Oil and Natural Gas Corporation (ONGC), a fortune 500 company and infrastructure leasing & finance services, one of India's leading infrastructure development and finance companies, Karnataka Industrial Area Development Board (KIADB) and Kanara Chamber of Commerce and Industry (KCCI). A unique combination of Government entities, a large financial institution and an apex chamber brings in the expertise to develop MSEZL with world-class industrial infrastructure.

2. ENVIRONMENT MONITORING

Environmental monitoring is being carried out at Mangalore SEZ, following guidelines and regulations of MoEF/CPCB and KSPCB statutory norms. In this regard, MSEZL has awarded the work to M/s Hubert EnviroCare Systems Pvt Ltd. and to monitor air quality, water quality & noise level for the three years. As per work order, during November 2017, we have conducted ambient air quality, ground water quality and noise level monitoring at 2, 9 and 2 locations respectively.

3. SCOPE AND METHODOLOGY

The scope of work carried out and methodology adopted for the survey are described below:

3.1. Ambient Air Quality

Ambient air quality monitoring was carried out at each location on 24 hour basis on two consecutive days per month. The identified monitoring stations are: A₁-CETP & A₂-WTP Area. To assess the ambient air quality status, monitoring stations are identified on the basis of meteorology in the upwind and downwind direction as well as to represent the cross sectional scenario of the MSEZ. Based on the activities the parameters chosen for assessment of air quality are PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂-Sulphur dioxide; NO₂-Nitrogen-di-oxide; CO-Carbon Mono Oxide (DL 0.1 mg/m³); O₃-Ozone (DL 10 µg/m³); NH₃-Ammonia (DL 5 µg/m³); Pb-Lead (DL 0.05 µg/m³); As-Arsenic (DL 0.1 ng/m³); Ni- (DL 0.5 ng/m³); Benzene-(DL 1 µg/m³); B(α)P-Benzo-α-pyrene (DL 0.1 ng/m³) as per CPCB stipulation.

3.1.1. Sampling and analysis of PM_{2.5} and PM₁₀ in ambient air (Gravimetric Method)

- i. Condition a filter paper in oven (i.e. 10 or 2.5 µm diameter)
- ii. Prepare a sampling assembly by uncorking screws of the bracket
- iii. Take a tare (initial) weight of the filter paper (w_i , mg)
- iv. Place the filter in the sampling system securely and tighten the screws of the bracket
- v. Set the timer for the period of sampling.
- vi. Start the sampler and adjust flow rate to about 2L/ min for 24 hrs sampling
- vii. Note the flow rate at the end of the desired sampling period and stop the sampler
- viii. Transit the sampling train to environmental laboratory carefully with scientific precautions
- ix. Condition the filter paper again for the same period as was done prior to sampling.

Laboratory analysis:

Weighing of exposed samples:

- i. Take final weight of the exposed filter with a standard balance (w_f , mg)

Calculations:

- i. Average flow rate (initial and final flow rates) in L/ min
 $= (\text{Initial flow rate} + \text{final flow rate}) / 2$
- ii. Total vol. of air sampled (TVA) in m³
 $= \text{Avg. flow rate (L/min)} * 10^{-3} (\text{m}^3/\text{L}) * \text{sampling time (hr)} * 60 (\text{min/hr})$
- iii. Concentration of SPM in µg/m³
 $= (w_f - w_i) (\text{mg}) / \text{TVA (m}^3\text{)} * 10^6 \mu\text{g/m}^3$

3.1.2. Sampling and analysis of Sulphur dioxide

- i. Prepare absorbing reagent (sodium tetra-chloromercurate) by dissolving 27.2 g mercuric chloride and 11.7 g sodium chloride in 1 lit of water
- ii. Prepare a sampling train of at least 2 gas bubblers (for average reading) properly washed with distilled water and air dried.
- iii. Place bubblers in the sampling system securely connecting to the manifold. Check the connections of bubblers with the manifold and the inlet and outlet
- iv. Fill the bubblers with an absorbing reagent with an amount sufficient to last for 24 hours (approximately 15 ml for 8 hours sampling to 50 ml for 24 hours sampling)
- v. To eliminate interference of traces metals, if any ,1 drop of 0.01% EDTA solution may be added to the reagent prior to sampling ;similarly, effect of oxide of nitrogen may also be eliminated by adding 1 ml of 0.06% sulphamic acid to the reagent at site
- vi. Start the sampler and adjust flow rate to 2 lit/ min.
- vii. Note the flow rate at the end of desired sampling period and stop the sampler
- viii. Transit the sampling train to environmental laboratory carefully with scientific precautions and preserve the sample tubes in a controlled environmental conditions

Laboratory analysis:**Calibration curve:**

- i. Prepare a standard solution of SO₂ concentrations ranging from 0 to 25 µg SO₂ by taking definite amount of std. sulphur dioxide solution in a 25 ml volumetric flasks
- ii. Add 14 ml of absorbing reagent and 1 ml of pararosaniline hydrochloride to each of the flasks making a total volume of 20 ml.
- iii. Measure absorbance for each flasks by spectrophotometer at 540 nm wavelength
- iv. Plot graph of absorbance v/s concentration

Absorbance in samples:

- i. Transfer samples to a 25 ml flask and develop colour as done in calibration curve
- ii. Measure absorbance at 540 nm
- iii. Find out the concentration (μgSO_2) corresponding to the measured absorbance from the calibration curve

Calculations:

- i. Average flow rate (if there is a significant difference in initial and final flow rates)
- ii. Total volume of air sampled (TVA) in m³

$$= \text{Avg. flow rate (lit)} * 10^{-3} (\text{m}^3/\text{lit}) * \text{sampling time (hr)} * 60 (\text{min/hr})$$
- iii. $\mu\text{gSO}_2/\text{TVA}$

3.1.3. Sampling and analysis of Nitrogen-di-oxide

- i. Prepare absorbing reagent (a solution of sodium hydroxide and arsenite) by dissolving 4 g sodium hydroxide and 1 g of sodium arsenite in 1 lit of distilled water
- ii. Prepare a sampling train of at least 2 gas bubblers (for average reading) properly washed with distilled water and air dried .
- iii. Place bubblers in the sampling system securely connecting to the manifold. Check the connections of bubblers with the manifold and the inlet and outlet
- iv. Fill the bubblers with an absorbing reagent with an amount sufficient to last for 24 hours (approximately 15 ml for 8 hours sampling to 50 ml for hours sampling)
- v. To eliminate interference of sulphur dioxide , drop of hydrogen peroxide may be added to the reagents to convert sulphur dioxide into sulphate during analysis
- vi. Start the sampler and adjust flow rate to about 0.2 lit/ min for 24 hours sampling
- vii. Note the flow rate at the end of desired sampling period and stop the sampler
- viii. Transit the sampling train to environmental laboratory carefully with scientific precautions and preserve the sample tubes in a controlled environmental conditions

Laboratory analysis:**Calibration curve:**

- i. Prepare a standard solution of NO_x concentrations ranging from 0 to 25 µg SO₂ by taking definite amount of std. sulphur dioxide solution in a 25 ml volumetric flasks
- ii. Add 14 ml of absorbing reagent and 1 ml of pararosaniline hydrochloride to each of the flasks making a total volume of 20 ml.
- iii. Measure absorbance for each flasks by spectrophotometer at 540 nm wavelength
- iv. Plot graph of absorbance v/s concentration

Absorbance in samples:

- i. Transfer samples to a 25 ml flask and develop colour as done in calibration curve
- ii. Measure absorbance at 540 nm
- iii. Find out the concentration (µg NO_x) corresponding to the measured absorbance from the calibration curve

Calculations:

- i. Average flow rate (if there is a significant difference in initial and final flow rates)
- ii. Total volume of air sampled (TVA) in m³

$$\text{= Avg. flow rate (lit)} * 10^{-3} (\text{m}^3/\text{lit}) * \text{sampling time (hr)} * 60 (\text{min/hr})$$

$$\mu\text{gNO}_x/\text{TVA}$$

3.1.4. Sampling and analysis of Carbon Mono Oxide**Preparation of sample train:**

- i. Sampling begins with conditioning a sampling train and then gas analyzer
- ii. Pressure system is preferred to condition the sampling train by installing pump before the analyzer. Reducing valve needs to be fitted between the analyser and pump to eliminate the pulsing effect of pump on the analyzer
- iii. Flow meter is to be installed just before the analyzer
- iv. A fibre filter is used to capture the particulate matter prior to the optical cell to prevent its interference. As it often accumulates on the optical cell reducing the efficiency
- v. To eliminate the interference of water vapour ,refrigeration or desiccant with magnesium perchlorate may be used

Mode of operation:

- i. Continuous analysis is carried out at the flow rate of about 100 ml/min to 1000 ml/min (depending upon the level of pollution near the location) for the desired sampling period
- ii. Discrete sampling may also be possible with infra red analyzer. It however requires proper cleaning of the sampling train.

Steps:

- i. Calibration of analyzer can be carried out if required using standard gases
- ii. Sampler is allowed to warm up for some time before actual readings are taken till the sampler gives steady response and temperature stability

3.1.5. Sampling and analysis of Ozone**Dynamic calibration:**

- i. Dynamic calibration may be performed by preparing a large mixture of ozone in air
- ii. The output of an ozonizer is fed into the intake of a small blower delivering air. The mixture of gas however emerges through a short length of pipe
- iii. One portion of this mixture is analyzed in the recorder.
- iv. Another portion is analyzed through a faintly blue iodine solution containing starch and potassium iodide.
- v. Titrated this solution with sodium thiosulphate(0.1N)
- vi. The end point established by comparison with the blue starch iodine solution
- vii. Mixture of ozone and air in polyester film bag may be prepared and admitted to the analyzer.
- viii. The mixture is analyzed at the time it is used since the ozone decomposes gradually
- ix. Analysis is then performed by passing a measured volume through an impinge containing buffered KI solution and determined the released iodine by spectrometer method
- x. Make the second mixture about midscale concentration and adjust sample or reagent flow rates until the recorder reading agrees with the absorbance scale according to the analytically determined concentration of ozone
- xi. Check several other points on the curve if desired and liner or logarithmic chart may be prepared followed by a calibration curve to read in ppm

Laboratory analysis:**Calibration curve:**

- i. Plot graph of absorbance v/s concentration

Procedure:

- i. Place a fresh absorbent solution in the storage bottle and operate the solution pump until the liquid are full
- ii. After the flow has stabilized itself, zero the recorder and start the air pump
- iii. Set the flow at convenient rates such as 4 ml/ min of solution and 4 l/min of air
- iv. Check and adjust the flow rates daily.
- v. Adjust the pH of the solution once or twice a week ,at time the solution shall be brought up to volume by addition of distilled water
- vi. Change the carbon filter about once a month. Also change the absorbing solution at the same time

3.1.6. Sampling and analysis of Ammonia:

Ammonia is collected in dilute Sulphuric acid solution in midget impingers to form Ammonium Sulphate. The solution is treated with Nesselers reagent to produce a yellow brown complex. The Ammonia concentration is determined by reading the absorption of the complex at 440 nm and comparing with a standard curve.

3.1.7. Sampling and analysis of Lead, Nickel, Arsenic:

1. Sampling procedure:

Tilt back the inlet and secure it according to manufacturer's instructions. Loosen the face-plate wing-nuts and remove the face plate. Remove the filter from its jacket and centre it on the support screen with the rough side of the filter facing upwards. Replace the face-plate and tighten the wing-nuts to secure the rubber gasket against the filter edge. Gently lower the inlet. For automatically flow-controlled units, record the designated flow rate on the data sheet. Record the reading of the elapsed time meter. The specified length of sampling is commonly 8 hours or 24 hours. During this period, several reading (hourly) of flow rate should be taken. After the required time of sampling, record the flow meter reading and take out the filter media from the sampler and put in a container or envelope

2. Analysis:

i. Hot plate procedure:

Cut a 1" x 8" strip or half the filter from the 8" x 10" filter using a stainless steel pizza cutter. Place the filter in a beaker using vinyl gloves or plastic forceps. Cover the filter with the extraction solution (3% HNO₃ & 8% HCl). Place beaker on the hotplate, contained in a fume hood, and reflux gently while covered with a watch glass for 30 min. Do not allow sample to dry. Remove the beakers from the hot-plate and allow to cool. Rinse the beaker walls and wash with distilled water. Add approximately 10 mL reagent water to the remaining filter material in the beaker and allow to stand for at least 30 min. Transfer the extraction fluid in the beaker to a 100 mL volumetric flask or other graduated vessel. Rinse the beaker and any remaining solid material with distilled water and add the rinses to the flask. Dilute to the mark with distilled water (Type I) water and shake. The final extraction solution concentration is 3 % HNO₃/8% HCl. The filtered sample is now ready for analysis

2.1. Analysis of samples:

i. Instrument / Equipment:

A light beam containing the corresponding wavelength of the energy required to raise the atoms of the analyte from the ground state to the excited state is directed through the flame or furnace. This wavelength is observed by a monochromator and a detector that measure the amount of light absorbed by the element, hence the number of atoms in the ground state in the flame or furnace. A hollow cathode lamp for the element being determined provides a source of that metal's particular absorption wavelength. The method describes both flame atomic absorption (FAA) spectroscopy and graphite furnace atomic absorption (GFAA) spectroscopy. Atomic Absorption Spectrophotometer - analyze the metals by Flame, if results are below detection limit then go for GTA. Arsenic is analyzed by Flame – VGA.

ii. Flame Procedure:

Set the atomic absorption spectrophotometer for the standard condition as follows: choose the correct hollow cathode lamp, align the instrument, position the monochromator at the value recommended by the manufacturer, select the proper monochromator slit width, set the light source current, ignite the flame, regulate the flow of fuel and oxidant, adjust the burner for maximum absorption and stability and balance the meter. Run a series of standards of the metal of interest and construct a calibration curve. Aspirate the blanks and samples. Dilute samples that exceed the calibration range. For Lead (Pb) and Nickel (Ni), the wavelength required for analysis is 217nm and 232nm respectively. Where as in case of Arsenic (As), the VGA should attach with Flame and the wavelength required for analysis is 193.7nm.

3. Calibration:

Prepare standard solutions from the stock solutions. Select at least three standards to cover linear range as recommended by method. Aspirate the standards into the flame or inject the standards into the furnace and record the absorbance. Prepare the calibration graph by plotting absorbance and concentration in $\mu\text{g/ml}$.

i. Preparation of Standards:

For each metal that is to be determined, standards of known concentration must be acquired commercially certified standards.

ii. Standard Curve:

Standard curve is prepared by using standard solutions of known concentration.

4. Calculations:**i. Sample Air Volume:**

Sample air volume can be calculated by using the following equation:

$$V = (Q) (t)$$

Where,

V = volume of air, m^3

Q = average sampling rate, m^3/min .

t = time in minutes.

ii. Metal Concentration:

$$C = (Ms - Mb) \times Vs \times Fa/V \times Ft$$

Where,

C = concentration, $\mu\text{g metal}/\text{m}^3$

Ms = metal concentration $\mu\text{g/mL}$

Mb = blank concentration $\mu\text{g/mL}$

Vs = total volume of extraction in mL

Fa = total area of exposed filter in cm^2

V = Volume of air sampled in m^3

Ft = Area of filter taken for digestion in cm^2

3.1.8. Sampling and analysis of Benzo- α -pyrene:

Benzo (a) Pyrene (BaP) is one of the most important constituent of PAH compounds and also one of the most potent carcinogens. This can be measured in both particulate phase and vapour phase. In the vapour phase the concentration of B(a)P is significantly less than the particulate phase. Therefore, more care to be taken for the measurement of Benzo (a) Pyrene in the particulate phase. The molecular formula of B(a)P is C₂₀H₁₂ having molecular weight 252.

It is based on BIS method IS 5182 (Part 12):2004 and USEPA method (TO-13). This method is designed to collect particulate phase PAHs in ambient air and fugitive emissions and to determine individual PAH compounds using capillary gas chromatograph equipped with flame ionization detector. It is a high volume (1.2m³/min) sampling method capable of detecting sub.ng/m³ concentration of PAH in 24 hours sample (i.e. collected in 3 shifts of 8 hour each with 480 m³ sampling volume of air).

i. Sampling:

i. Instrument/Filter Selection:

24 hr. sampling using PM₁₀ high volume sampler with 8 hourly samples using EPM-2000 glass fibre or equivalent filter

ii. Sample Processing

a. Extraction:

Filter papers (half of all the filters papers collected in a day) are cut into strips using scissors and transfer to 250 ml beaker. Add ~50 ml. of Toluene (GC/HPLC grade). These samples are extracted with toluene using ultra sonic sample can be extracted using soxhlet bath for about 30 minutes. Repeat the procedure twice (50ml x 2 times) for complete extraction. Alternatively, extraction apparatus for about 8 hr. with Toluene and repeat it twice.

b. Filtration:

Filter the extracted samples with Whatman filter paper No. 41 containing 2 gm of Anhydrous Sodium Sulphate (to remove moisture).

c. Concentration:

After filtration, the filtrate is concentrated using Rotary vacuum evaporator to 2ml final volume.

d. Clean-up with silica Gel:

To clean up the impurities, pass 2 ml of concentrated sample through silica gel column (pre conditioned, 60-80 mesh, and 200-250mmx10 mm with Teflon stopcock). After cleaning add 5ml cyclohexane and collect the elute in 25 ml beaker. Repeat the process for at least 3 times and collect it in the same beaker. Alternatively Solid Phase Extraction (SPE) may be used for clean up the impurities of sample.

e. Re-concentration with rotary vacuum evaporator:

The Cleaned up extract/filtrate (approximately 17 ml) is further concentrated using rotary evaporator and it is evaporated to nearly dryness with Nitrogen.

f. Final Sample volume:

The dried sample is re-dissolved in 1ml of toluene and transfer into 4 or 5 ml amber vials final analysis.

ii. Calculations:

Calculate the concentration in ng/ μ l of each identified analyte or B(a)P in the sample extract (Cs) as follows:

Calculate the air volume from the periodic flow reading taken during sampling using the following equation:

$$V = Q \times T$$

Where,

Q = Average flow rate of sampling m³/min

T = sampling time, in min.

V = total sample volume at ambient conditions in m³

Concentration of analyte i.e B(a)P:

The concentration of PAH compound or Benzo(a)pyrene in ng /m³ in the air sampled is given by:

$$C (\text{ng/m}^3) = Cs * Ve / Vi * Vs$$

Where,

Cs : Concentration of Benzo (a) pyrene in ng / μl in the sample extract recorded by GC.

Ve : Final volume of extract in μl (i.e 1000)

Vi : Injection Volume (i.e 1 μl)

Vs : Volume of air sample in m³

3.2 Noise Levels

In general, noise is sound which is composed of many frequency components of various loudness distributed over the audible frequency range. Various noise scales have been introduced to describe, in a single number, the response of an average human to a complex sound made up of various frequencies at different loudness levels. The most common and universally accepted scale is the A weighted scale which is measured as decibel (dB). This is more suitable for audible range of 20 to 20000 HZ and has been designed to weigh various components of noise according to the response of human ear.

The impact of noise from the construction can be undertaken by taking in to consideration various factors like potential damage to hearing. Physiological responses, annoyance and general community responses, which have several effects, like Noise Induced Hearing Loss (NIHL). Noise generating sources are identified based on the activities like vehicle movement & associated construction activities. Accordingly, about 5 locations were identified to assess the noise levels in different zones viz, IISER Vithura, residential and construction zones. The identified locations are:

N₁-CETP and N₂-WTP

Noise measurements were carried out using Lutron SL 4001 model. The sound level meter used was in accordance with IS: 9779 and IEC 651 standards for noise survey. Instrument calibration was done in NABL accredited.

Noise measurements were undertaken at all locations, with duration of 10 minutes per hour (as per Order one minute per hour) continuously for 24 hours in a day for two days in a week for four weeks in the month. The day noise levels were monitored during 6 am to 10 pm and night levels during 10 pm to 6 am at all locations.

For noise levels measured over a given period of time interval, it is possible to describe important features of noise using statistical quantities. This is calculated using the percent of the time certain noise levels are exceeded during the time interval. The notation for the statistical quantities of noise levels are:

L₁₀ is the noise level exceeded 10 percent of the time,
L₅₀ is the noise level exceeded 50 percent of the time and
L₉₀ is the noise level exceeded 90 percent of the time.

L_{eq} is the Equivalent sound pressure level, which is equivalent to the same sound energy as the actual fluctuating sound.

This is necessary because sound from noise source often fluctuates widely during a given period of time. L_{eq} is calculated from the following equation:

$$L_{eq} (\text{hrly}) = L_{50} + [(L_{10} - L_{90})^2 / 60]$$

The noise rating developed for community noise from all sources is the Day-Night sound Level (L_{dn}). It is similar to a 24 hrs, equivalent sound level except that during night time period a 10 dB(A) weighting penalty is added to the instantaneous sound level before computing the 24 hourly average. This nighttime penalty is added to account for the fact that noise during night when people usually sleep is judged as more annoying than the same noise during the daytime.

The L_{dn} for a given location in a community is calculated from the hourly L_{eq} values by the following equation: $L_{dn} = 10 \log (1/24 (16[10^{Ld/10}] + [10^{Ln-10/10}]))$

Where L_d is the equivalent sound level during the day time (6 am to 10 pm) and L_n is the equivalent sound level during the night time (10 pm to 6 am).

Ambient Noise standards have been notified by the Ministry of environment and Forests vide Gazette notification dated 18th November, 2009 based on the 'A' weighted equivalent noise level (L_{eq}). The standards are given in the Annexure.

Noise measurements were made at 1.5 m above the ground level and a suitable distance from the corridor. The basic Unit of measurements were taken in the fast mode and were sampled to yield statistical information's such as L_{eq} (equivalent noise level), L₁₀ and L₉₀, those exceeded for 10 and 90 percent of the time respectively. The noise level L₁₀ can be considered as long term noise L₉₀ can be considered as the background noise.

Calibration: The monitoring and analytical instruments are being calibrated by ETDC periodically. The correction factors, if any, are being used in computation of the data.

3.3 Water Quality

Any adverse impact or pollution water will have serious effect on the environment. Hence, it becomes important to monitor the water quality periodically in the port project area. The samples were analysed as per IS: 3025 and compared to the specifications of IS: 10500 norms. The locations identified for collection of samples were

- W₁-Oddidakal (GW)
- W₂-Shantigudde (GW)
- W₃-Chandrahas Nagar (GW)
- W₄- Permude (GW)
- W₅- CETP (GW)
- W₆- Non Processing Area (GW)
- W₇- Permude Bajpe Village Bandary (GW)
- W₈- Kalavar (GW)
- W₉- 10ml water Reservoir (GW)

4.0 Results**4.1 Ambient Air Quality****TEST REPORT: AMBIENT AIR MONITORING (AAQ)**

| | |
|-------------------------|---|
| Name of the Industry | M/s. Mangalore SEZ Limited |
| Address of the Industry | 3 rd Floor, MUDA Building, Ashok Nagar, Urwa Stores, Mangalore- 575006 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | CETP |
| Sampling Date | 16.11.2017 |
| Report Date | 07.12.2017 |
| Report No | HECS/AA/001/071217 |

CONSOLIDATED TEST RESULTS: NOVEMBER 2017


| Parameter Monitored | NAAQ Standard, 2009 | Results |
|--|---------------------|---------|
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60* | 17 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 57 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 05 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 10 |
| CO (mg/m^3) | 2** | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100** | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400* | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1* | BDL |
| As (ng/m^3) | 6*** | BDL |
| Ni (ng/m^3) | 20*** | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 5*** | BDL |
| B(a)P (ng/m^3) | 1*** | BDL |

Note: * : 24 hours average; ** : 8 hours average; *** : Annual average


Note: BDL =Below detection limit; DL= Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂ Sulphur dioxide; NO₂ - Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³); O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$); NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$); As-Arsenic (DL 0.1 ng/m³); Ni-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(a)P- Benzo - α -pyrene (DL 0.1 ng/m³); ng/m³: nanogram per cubic meter; $\mu\text{g}/\text{m}^3$ - microgram per cubic meter

CONCLUSION: All the parameters meet the NAAQ Standards, 2009

*****End of Report *****



Sampled by




Prepared by



Checked by

Authorized Signatory



TEST REPORT: AMBIENT AIR MONITORING (AAQ): NOVEMBER 2017

| | |
|-------------------------|---|
| Name of the Industry | M/s. Mangalore SEZ Limited |
| Address of the Industry | 3 rd Floor, MUDA Building, Ashok Nagar, Urwa Stores, Mangalore- 575006 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | WTP |
| Sampling Date | 13.11.2017 |
| Report Date | 07.12.2017 |
| Report No | HECS/AA/002/071217 |

| Parameter Monitored | NAAQ Standard, 2009 | Results |
|--|---------------------|---------|
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60* | 16 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100* | 50 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80* | 08 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80* | 11 |
| CO (mg/m^3) | 2** | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100** | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400* | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1* | BDL |
| As (ng/m^3) | 6*** | BDL |
| Ni (ng/m^3) | 20*** | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 5*** | BDL |
| B(α)P (ng/m^3) | 1*** | BDL |

Note: "24 hours average"; ** : 8 hours average; *** : Annual average

Note: BDL =Below detection limit; DL =Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂ Sulphur dioxide; NO₂ - Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³); O₃-Ozone(DL 10 µg/m³); NH₃-Ammonia (DL 5 µg/m³); Pb-Lead (DL 0.05 µg/m³); As-Arsenic (DL 0.1 ng/m³); Ni-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 µg/m³); B(a)P- Benzo- α -pyrene (DL 0.1 ng/m³); ng/m³ - nanogram per cubic meter; µg/m³ - microgram per cubic meter

CONCLUSION: All the parameters meet the NAAQ Standards, 2009


*****End of Report *****

Ravi
Sampled by


Prepared by

~~Checked by~~


Authorized Signatory



4.2 Noise level:

TEST REPORT: NOISE MONITORING: NOVEMBER 2017

| | |
|-------------------------|---|
| Name of the Industry | M/s. Mangalore SEZ Limited |
| Address of the Industry | 3 rd Floor, MUDA Building, Ashok Nagar, Urwa Stores, Mangalore- 575006 |
| Sample Description | Noise Monitoring |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | CETP & WTP areas |
| Sampling Date | 17.11.2017 |
| Report Date | 07.12.2017 |
| Report No. | HECS/N/001-002/071217 |

| Time (Hrs) | CETP AREA | WTP AREA |
|-------------|-----------|----------|
| 06.00 | 66.2 | 65.7 |
| 07.00 | 67.0 | 66.5 |
| 08.00 | 61.9 | 62.1 |
| 09.00 | 60.8 | 61.6 |
| 10.00 | 63.5 | 60.4 |
| 11.00 | 60.6 | 64.7 |
| 12.00 | 63.3 | 68.0 |
| 13.00 | 68.8 | 67.1 |
| 14.00 | 61.7 | 59.7 |
| 15.00 | 64.8 | 61.2 |
| 16.00 | 71.0 | 62.5 |
| 17.00 | 69.4 | 61.4 |
| 18.00 | 60.1 | 64.1 |
| 19.00 | 61.3 | 69.0 |
| 20.00 | 58.8 | 63.4 |
| 21.00 | 58.0 | 58.8 |
| 22.00 | 55.1 | 58.7 |
| 23.00 | 52.7 | 53.5 |
| 00.00 | 56.6 | 51.9 |
| 01.00 | 54.5 | 45.6 |
| 02.00 | 46.0 | 45.0 |
| 03.00 | 48.2 | 46.1 |
| 04.00 | 43.7 | 47.3 |
| 05.00 | 47.0 | 49.2 |
| MIN | 43.7 | 45.0 |
| MAX | 71.0 | 69.0 |
| Day dB(A) | 63.08 | 63.23 |
| Night dB(A) | 49.81 | 48.37 |

Limits: Industrial Area: Day Time-75 dB (A), Night Time-70 dB (A). Commercial Area: Day Time-65 dB (A), Night Time-55 dB (A). Residential Area: Day Time-55 dB (A), Night Time-45 dB (A). Silence Zone: Day Time-50 dB (A), Night Time-40 dB (A).

Note: Monitoring Date represents 24 hours from 6:00 am to 6:00am next day. Legend: Leq- Equivalent Noise Level (hourly); Ld-Day Time Equivalent Noise Level (06:00-22:00 hrs); Ln-Night Time Equivalent Noise Level (22:00-06:00 hrs); and Ldn-24 hourly Equivalent Noise Level. Reference: The Noise Pollution (Regulation and Control) Rules, 2000, CPCB, New Delhi

CONCLUSION: All the parameters meet MoEF Standards

Ravi
Sampled by

Prepared by

Checked by

Authorized Signatory



4.3 Water Analysis Results

TEST REPORT

| Name of the Industry | M/s. Mangalore SEZ Limited | | | |
|-------------------------|---|-----------|---------------|--|
| Address of the Industry | 3 rd Floor, MUDA Building, Ashok Nagar, Urwa Stores, Mangalore- 575006 | | | |
| Sample Description | Oddidakal (GW) | | | |
| Date of Sampling | 16.11.2017 | | | |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd | | | |
| Report Date | 07.12.2017 | | | |
| Report No | HECS/W/001/071217 | | | |
| Sl.No. | Parameters monitored | Units | Results | As per IS 10500:2012 standard limit |
| | | | | Acceptable (max) |
| 1. | Colour | Hazen | 1 (DL 1) | 5 15 |
| 2. | pH (at 25 °C) | - | 6.8 | 6.5-8.5 No Relaxation |
| 3. | Electrical Conductivity | µS/cm | 95 | Nil Nil |
| 4. | Odour | - | Agreeable | Agreeable |
| 5. | Taste | - | Agreeable | Agreeable |
| 6. | Turbidity | NTU | BDL (DL 0.1) | 1 5 |
| 7. | Total Dissolved Solids | mg/L | 62 | 500 2000 |
| 8. | Alkalinity as CaCO ₃ | mg/L | 49 | 200 600 |
| 9. | Total Hardness | mg/L | 45 | 200 600 |
| 10. | Calcium as Ca | mg/L | 14 | 75 200 |
| 11. | Magnesium as Mg | mg/L | 2 | 30 100 |
| 12. | Iron as Fe | mg/L | BDL(DL 0.02) | 0.3 No Relaxation |
| 13. | Sulphate as SO ₄ | mg/L | 5.3 | 200 400 |
| 14. | Chloride as Cl | mg/L | 12 | 250 1000 |
| 15. | Boron as B | mg/L | BDL(DL 0.1) | 0.5 1.0 |
| 16. | Residual free chlorine | mg/L | BDL (DL 0.1) | 0.2 1 |
| 17. | Fluoride | mg/L | 0.20 | 1.0 1.5 |
| 18. | Phenolic Compounds | mg/L | BDL(DL 0.001) | 0.001 0.002 |
| 19. | Manganese as Mn | mg/L | BDL(DL 0.01) | 0.1 0.3 |
| 20. | Zinc as Zn | mg/L | BDL(DL 0.01) | 5 15 |
| 21. | Arsenic as As | mg/L | BDL(DL 0.005) | 0.01 0.05 |
| 22. | Cyanide as CN | mg/L | BDL (DL 0.01) | 0.05 No Relaxation |
| 23. | Cadmium as Cd | mg/L | BDL(DL 0.01) | 0.003 No Relaxation |
| 24. | Chromium as Cr | mg/L | BDL(DL 0.01) | 0.05 No Relaxation |
| 25. | Aluminium | mg/L | BDL(DL 0.02) | 0.03 0.2 |
| 26. | Selenium as Se | mg/L | BDL(DL 0.005) | 0.01 No Relaxation |
| 27. | Lead as Pb | mg/L | BDL(DL 0.01) | 0.01 No Relaxation |
| 28. | Mercury as Hg | mg/L | BDL(DL 0.001) | 0.001 No Relaxation |
| 29. | Nitrate Nitrogen NO ₃ | mg/L | 0.4 | 45 No Relaxation |
| 30. | E.Coli | MPN/100mL | Nil | Shall not be detectable in any 100 mL sample |


Note:-BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L- Milligrams per Liter;
MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012
End of Report

Durgam
Prepared by

TP
Checked by

Authorised Signatory



TEST REPORT

| Name of the Industry | M/s. Mangalore SEZ Limited | | | |
|-------------------------|---|-----------|---------------|--|
| Address of the Industry | 3 rd Floor, MUDA Building, Ashok Nagar, Urwa Stores, Mangalore- 575006 | | | |
| Sample Description | Shantigudde (GW) | | | |
| Date of Sampling | 16.11.2017 | | | |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd | | | |
| Report Date | 07.12.2017 | | | |
| Report No | HECS/W/002/071217 | | | |
| Sl.No. | Parameters monitored | Units | Results | As per IS 10500:2012 standard limit |
| | | | | Acceptable (max) |
| 1. | Colour | Hazen | 2 (DL 1) | 5 15 |
| 2. | pH (at 25 °C) | - | 6.5 | 6.5-8.5 No Relaxation |
| 3. | Electrical Conductivity | µS/cm | 97 | Nil Nil |
| 4. | Odour | - | Agreeable | Agreeable |
| 5. | Taste | - | Agreeable | Agreeable |
| 6. | Turbidity | NTU | BDL(DL 0.1) | 1 5 |
| 7. | Total Dissolved Solids | mg/L | 63 | 500 2000 |
| 8. | Alkalinity as CaCO ₃ | mg/L | 58 | 200 600 |
| 9. | Total Hardness | mg/L | 47 | 200 600 |
| 10. | Calcium as Ca | mg/L | 8.1 | 75 200 |
| 11. | Magnesium as Mg | mg/L | 3.2 | 30 100 |
| 12. | Iron as Fe | mg/L | BDL(DL 0.02) | 0.3 No Relaxation |
| 13. | Sulphate as SO ₄ | mg/L | 5.8 | 200 400 |
| 14. | Chloride as Cl | mg/L | 30 | 250 1000 |
| 15. | Boron as B | mg/L | BDL(DL 0.1) | 0.5 1.0 |
| 16. | Residual free chlorine | mg/L | BDL(DL 0.1) | 0.2 1 |
| 17. | Fluoride | mg/L | 0.26 | 1.0 1.5 |
| 18. | Phenolic Compounds | mg/L | BDL(DL 0.001) | 0.001 0.002 |
| 19. | Manganese as Mn | mg/L | BDL(DL 0.01) | 0.1 0.3 |
| 20. | Zinc as Zn | mg/L | BDL(DL 0.01) | 5 15 |
| 21. | Arsenic as As | mg/L | BDL(DL 0.005) | 0.01 0.05 |
| 22. | Cyanide as CN | mg/L | BDL(DL 0.01) | 0.05 No Relaxation |
| 23. | Cadmium as Cd | mg/L | BDL(DL 0.01) | 0.003 No Relaxation |
| 24. | Chromium as Cr | mg/L | BDL(DL 0.02) | 0.05 No Relaxation |
| 25. | Aluminium | mg/L | BDL(DL 0.01) | 0.03 0.2 |
| 26. | Selenium as Se | mg/L | BDL(DL 0.005) | 0.01 No Relaxation |
| 27. | Lead as Pb | mg/L | BDL(DL 0.01) | 0.01 No Relaxation |
| 28. | Mercury as Hg | mg/L | BDL(DL 0.001) | 0.001 No Relaxation |
| 29. | Nitrate Nitrogen NO ₃ | mg/L | 1.3 | 45 No Relaxation |
| 30. | E.Coli | MPN/100mL | Nil | Shall not be detectable in any 100 mL sample |


Note:-BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012
End of Report

Prepared by

Checked by

Authorized Signatory




TEST REPORT

| Name of the Industry | M/s. Mangalore SEZ Limited | | | | |
|-------------------------|--|-----------|---------------|--|-------------------|
| Address of the Industry | 3 rd Floor, MUDA Building, Ashok Nagar, Urwa Stores, Mangalore- 575006 Chandras Nagar (GW) | | | | |
| Sample Description | 16.11.2017 | | | | |
| Date of Sampling | Hubert Enviro Care Systems (P) Ltd | | | | |
| Sample Collected by | 07.12.2017 | | | | |
| Report Date | HECS/W/003/071217 | | | | |
| Report No | | | | | |
| Sl.No. | Parameters monitored | Units | Results | As per IS 10500:2012 standard limit | |
| | | | | Acceptable (max) | Permissible (max) |
| 1. | Colour | Hazen | 1 (DL 1) | 5 | 15 |
| 2. | pH (at 25 °C) | - | 6.5 | 6.5-8.5 | No Relaxation |
| 3. | Electrical Conductivity | µS/cm | 75 | Nil | Nil |
| 4. | Odour | - | Agreeable | Agreeable | Agreeable |
| 5. | Taste | - | Agreeable | Agreeable | Agreeable |
| 6. | Turbidity | NTU | BDL (DL 0.1) | 1 | 5 |
| 7. | Total Dissolved Solids | mg/L | 49 | 500 | 2000 |
| 8. | Alkalinity as CaCO ₃ | mg/L | 19 | 200 | 600 |
| 9. | Total Hardness | mg/L | 15 | 200 | 600 |
| 10. | Calcium as Ca | mg/L | 5.2 | 75 | 200 |
| 11. | Magnesium as Mg | mg/L | 1.9 | 30 | 100 |
| 12. | Iron as Fe | mg/L | BDL(DL 0.02) | 0.3 | No Relaxation |
| 13. | Sulphate as SO ₄ | mg/L | 2.1 | 200 | 400 |
| 14. | Chloride as Cl | mg/L | 18 | 250 | 1000 |
| 15. | Boron as B | mg/L | BDL(DL 0.1) | 0.5 | 1.0 |
| 16. | Residual free chlorine | mg/L | BDL(DL 0.1) | 0.2 | 1 |
| 17. | Fluoride | mg/L | 0.23 | 1.0 | 1.5 |
| 18. | Phenolic Compounds | mg/L | BDL(DL 0.001) | 0.001 | 0.002 |
| 19. | Manganese as Mn | mg/L | BDL(DL 0.01) | 0.1 | 0.3 |
| 20. | Zinc as Zn | mg/L | BDL(DL 0.01) | 5 | 15 |
| 21. | Arsenic as As | mg/L | BDL(DL 0.005) | 0.01 | 0.05 |
| 22. | Cyanide as CN | mg/L | BDL(DL 0.01) | 0.05 | No Relaxation |
| 23. | Cadmium as Cd | mg/L | BDL(DL 0.01) | 0.003 | No Relaxation |
| 24. | Chromium as Cr | mg/L | BDL(DL 0.01) | 0.05 | No Relaxation |
| 25. | Aluminiuum | mg/L | BDL(DL 0.02) | 0.03 | 0.2 |
| 26. | Selenium as Se | mg/L | BDL(DL 0.005) | 0.01 | No Relaxation |
| 27. | Lead as Pb | mg/L | BDL(DL 0.01) | 0.01 | No Relaxation |
| 28. | Mercury as Hg | mg/L | BDL(DL 0.001) | 0.001 | No Relaxation |
| 29. | Nitrate Nitrogen NO ₃ | mg/L | 1.0 | 45 | No Relaxation |
| 30. | E.Coli | MPN/100mL | Nil | Shall not be detectable in any 100 mL sample | |


Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012
End of Report


Prepared by


Checked by


Authorized Signatory




TEST REPORT

| Name of the Industry | M/s. Mangalore SEZ Limited | | | |
|-------------------------|---|-----------|---------------|--|
| Address of the Industry | 3 rd Floor, MUDA Building, Ashok Nagar, Urwa Stores, Mangalore- 575006 | | | |
| Sample Description | Permude (GW) | | | |
| Date of Sampling | 16.11.2017 | | | |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd | | | |
| Report Date | 07.12.2017 | | | |
| Report No. | HECS/W/004/071217 | | | |
| Sl.No. | Parameters monitored | Units | Results | As per IS 10500:2012 standard limit |
| | | | | Acceptable (max) |
| 1. | Colour | Hazen | 1 (DL 1) | 5 15 |
| 2. | pH (at 25 °C) | - | 6.6 | 6.5-8.5 No Relaxation |
| 3. | Electrical Conductivity | µS/cm | 87 | Nil Nil |
| 4. | Odour | - | Agreeable | Agreeable |
| 5. | Taste | - | Agreeable | Agreeable |
| 6. | Turbidity | NTU | BDL (DL 0.1) | 1 5 |
| 7. | Total Dissolved Solids | mg/L | 57 | 500 2000 |
| 8. | Alkalinity as CaCO ₃ | mg/L | 23 | 200 600 |
| 9. | Total Hardness | mg/L | 28 | 200 600 |
| 10. | Calcium as Ca | mg/L | 8 | 75 200 |
| 11. | Magnesium as Mg | mg/L | 1.7 | 30 100 |
| 12. | Iron as Fe | mg/L | BDL(DL 0.02) | 0.3 No Relaxation |
| 13. | Sulphate as SO ₄ | mg/L | 1.9 | 200 400 |
| 14. | Chloride as Cl | mg/L | 18 | 250 1000 |
| 15. | Boron as B | mg/L | BDL(DL 0.1) | 0.5 1.0 |
| 16. | Residual free chlorine | mg/L | BDL(DL 0.1) | 0.2 1 |
| 17. | Fluoride | mg/L | 0.11 | 1.0 1.5 |
| 18. | Phenolic Compounds | mg/L | BDL(DL 0.001) | 0.001 0.002 |
| 19. | Manganese as Mn | mg/L | BDL(DL 0.01) | 0.1 0.3 |
| 20. | Zinc as Zn | mg/L | BDL(DL 0.01) | 5 15 |
| 21. | Arsenic as As | mg/L | BDL(DL 0.005) | 0.01 0.05 |
| 22. | Cyanide as CN | mg/L | BDL(DL 0.01) | 0.05 No Relaxation |
| 23. | Cadmium as Cd | mg/L | BDL(DL 0.01) | 0.003 No Relaxation |
| 24. | Chromium as Cr | mg/L | BDL(DL 0.01) | 0.05 No Relaxation |
| 25. | Aluminium | mg/L | BDL(DL 0.02) | 0.03 0.2 |
| 26. | Selenium as Se | mg/L | BDL(DL 0.005) | 0.01 No Relaxation |
| 27. | Lead as Pb | mg/L | BDL(DL 0.01) | 0.01 No Relaxation |
| 28. | Mercury as Hg | mg/L | BDL(DL 0.001) | 0.001 No Relaxation |
| 29. | Nitrate Nitrogen NO ₃ | mg/L | 0.91 | 45 No Relaxation |
| 30. | E.Coli | MPN/100mL | Nil | Shall not be detectable in any 100 mL sample |

Note:-BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012
End of Report


Prepared by


Checked by

Authorized Signatory




TEST REPORT


| Name of the Industry | M/s. Mangalore SEZ Limited | | | | |
|-------------------------|---|-----------|---------------|--|-------------------|
| Address of the Industry | 3 rd Floor, MUDA Building, Ashok Nagar, Urwa Stores, Mangalore- 575006 | | | | |
| Sample Description | CETP (GW) | | | | |
| Date of Sampling | 16.11.2017 | | | | |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd | | | | |
| Report Date | 07.12.2017 | | | | |
| Report No | HECS/W/006/071217 | | | | |
| Sl.No. | Parameters monitored | Units | Results | As per IS 10500:2012 standard limit | |
| | | | | Acceptable (max) | Permissible (max) |
| 1. | Colour | Hazen | 1 (DL 1) | 5 | 15 |
| 2. | pH (at 25 °C) | - | 6.5 | 6.5-8.5 | No Relaxation |
| 3. | Electrical Conductivity | µS/cm | 91 | Nil | Nil |
| 4. | Odour | - | Agreeable | Agreeable | Agreeable |
| 5. | Taste | - | Agreeable | Agreeable | Agreeable |
| 6. | Turbidity | NTU | BDL (DL 0.1) | 1 | 5 |
| 7. | Total Dissolved Solids | mg/L | 59 | 500 | 2000 |
| 8. | Alkalinity as CaCO ₃ | mg/L | 64 | 200 | 600 |
| 9. | Total Hardness | mg/L | 49 | 200 | 600 |
| 10. | Calcium as Ca | mg/L | 1.0 | 75 | 200 |
| 11. | Magnesium as Mg | mg/L | 5.2 | 30 | 100 |
| 12. | Iron as Fe | mg/L | BDL(DL 0.02) | 0.3 | No Relaxation |
| 13. | Sulphate as SO ₄ | mg/L | 7 | 200 | 400 |
| 14. | Chloride as Cl | mg/L | 6 | 250 | 1000 |
| 15. | Boron as B | mg/L | BDL(DL 0.1) | 0.5 | 1.0 |
| 16. | Residual free chlorine | mg/L | BDL (DL 0.1) | 0.2 | 1 |
| 17. | Fluoride | mg/L | 0.14 | 1.0 | 1.5 |
| 18. | Phenolic Compounds | mg/L | BDL(DL 0.001) | 0.001 | 0.002 |
| 19. | Manganese as Mn | mg/L | BDL(DL 0.01) | 0.1 | 0.3 |
| 20. | Zinc as Zn | mg/L | BDL(DL 0.01) | 5 | 15 |
| 21. | Arsenic as As | mg/L | BDL(DL 0.005) | 0.01 | 0.05 |
| 22. | Cyanide as CN | mg/L | BDL (DL 0.01) | 0.05 | No Relaxation |
| 23. | Cadmium as Cd | mg/L | BDL(DL 0.01) | 0.003 | No Relaxation |
| 24. | Chromium as Cr | mg/L | BDL(DL 0.02) | 0.05 | No Relaxation |
| 25. | Aluminium | mg/L | BDL(DL 0.005) | 0.03 | 0.2 |
| 26. | Selenium as Se | mg/L | BDL(DL 0.01) | 0.01 | No Relaxation |
| 27. | Lead as Pb | mg/L | BDL(DL 0.001) | 0.01 | No Relaxation |
| 28. | Mercury as Hg | mg/L | BDL(DL 0.001) | 0.001 | No Relaxation |
| 29. | Nitrate Nitrogen NO ₃ | mg/L | BDL (0.1) | 45 | No Relaxation |
| 30. | E.Coli | MPN/100mL | Nil | Shall not be detectable in any 100 mL sample | |

Note:-BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
MPN- Most Probable Number; mL-Milliliter


CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report


Prepared by


Checked by


Authorized Signatory



TEST REPORT

| Name of the Industry | M/s. Mangalore SEZ Limited | | | |
|-------------------------|---|-----------|---------------|--|
| Address of the Industry | 3 rd Floor, MUDA Building, Ashok Nagar, Urwa Stores, Mangalore- 575006 | | | |
| Sample Description | Non Processing Area(GW) | | | |
| Date of Sampling | 16.11.2017 | | | |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd | | | |
| Report Date | 07.12.2017 | | | |
| Report No | HECS/W/007/071217 | | | |
| Sl.No. | Parameters monitored | Units | Results | As per IS 10500:2012 standard limit |
| | | | | Acceptable (max) |
| 1. | Colour | Hazen | 1 (DL 1) | 5 15 |
| 2. | pH (at 25 °C) | - | 6.7 | 6.5-8.5 No Relaxation |
| 3. | Electrical Conductivity | µS/cm | 43 | Nil Nil |
| 4. | Odour | - | Agreeable | Agreeable |
| 5. | Taste | - | Agreeable | Agreeable |
| 6. | Turbidity | NTU | BDL (DL 0.1) | 1 5 |
| 7. | Total Dissolved Solids | mg/L | 28 | 500 2000 |
| 8. | Alkalinity as CaCO ₃ | mg/L | 8 | 200 600 |
| 9. | Total Hardness | mg/L | 11 | 200 600 |
| 10. | Calcium as Ca | mg/L | 3 | 75 200 |
| 11. | Magnesium as Mg | mg/L | BDL (0.1) | 30 100 |
| 12. | Iron as Fe | mg/L | BDL(DL 0.02) | 0.3 No Relaxation |
| 13. | Sulphate as SO ₄ | mg/L | 2 | 200 400 |
| 14. | Chloride as Cl | mg/L | 11 | 250 1000 |
| 15. | Boron as B | mg/L | BDL(DL 0.1) | 0.5 1.0 |
| 16. | Residual free chlorine | mg/L | BDL (DL 0.1) | 0.2 1 |
| 17. | Fluoride | mg/L | 0.25 | 1.0 1.5 |
| 18. | Phenolic Compounds | mg/L | BDL(DL 0.001) | 0.001 0.002 |
| 19. | Manganese as Mn | mg/L | BDL(DL 0.01) | 0.1 0.3 |
| 20. | Zinc as Zn | mg/L | BDL(DL 0.01) | 5 15 |
| 21. | Arsenic as As | mg/L | BDL(DL 0.005) | 0.01 0.05 |
| 22. | Cyanide as CN | mg/L | BDL (DL 0.01) | 0.003 No Relaxation |
| 23. | Cadmium as Cd | mg/L | BDL(DL 0.01) | 0.05 No Relaxation |
| 24. | Chromium as Cr | mg/L | BDL(DL 0.01) | 0.03 0.2 |
| 25. | Aluminium | mg/L | BDL(DL 0.02) | 0.01 No Relaxation |
| 26. | Selenium as Se | mg/L | BDL(DL 0.005) | 0.01 No Relaxation |
| 27. | Lead as Pb | mg/L | BDL(DL 0.01) | 0.01 No Relaxation |
| 28. | Mercury as Hg | mg/L | BDL(DL 0.001) | 0.001 No Relaxation |
| 29. | Nitrate Nitrogen NO ₃ | mg/L | 0.2 | 45 No Relaxation |
| 30. | E.Coli | MPN/100mL | N/I | Shall not be detectable in any 100 mL sample |

Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012
*****End of Report*****

Dinesh
Prepared by

✓
Checked by

Rajesh
Authorized Signatory



TEST REPORT

| Name of the Industry | M/s. Mangalore SEZ Limited | | | |
|-------------------------|---|-----------|---------------|--|
| Address of the Industry | 3 rd Floor, MUDA Building, Ashok Nagar, Urwa Stores, Mangalore- 575006 | | | |
| Sample Description | Permude Bajpe Village Boundary (GW) | | | |
| Date of Sampling | 16.11.2017 | | | |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd | | | |
| Report Date | 07.12.2017 | | | |
| Report No | HECS/W/008/071217 | | | |
| Sl.No. | Parameters monitored | Units | Results | As per IS 10500:2012 standard limit |
| | | | | Acceptable (max) |
| 1. | Colour | Hazen | 1 (DL 1) | 5 15 |
| 2. | pH (at 25 °C) | - | 6.5 | 6.5-8.5 No Relaxation |
| 3. | Electrical Conductivity | µS/cm | 36 | Nil Nil |
| 4. | Odour | - | Agreeable | Agreeable |
| 5. | Taste | - | Agreeable | Agreeable |
| 6. | Turbidity | NTU | BDL (DL 0.1) | 1 5 |
| 7. | Total Dissolved Solids | mg/L | 23 | 500 2000 |
| 8. | Alkalinity as CaCO ₃ | mg/L | 9 | 200 600 |
| 9. | Total Hardness | mg/L | 11 | 200 600 |
| 10. | Calcium as Ca | mg/L | 3.2 | 75 200 |
| 11. | Magnesium as Mg | mg/L | 1.9 | 30 100 |
| 12. | Iron as Fe | mg/L | BDL(DL0.02) | 0.3 No Relaxation |
| 13. | Sulphate as SO ₄ | mg/L | 6.0 | 200 400 |
| 14. | Chloride as Cl | mg/L | 8 | 250 1000 |
| 15. | Boron as B | mg/L | BDL(DL 0.1) | 0.5 1.0 |
| 16. | Residual free chlorine | mg/L | BDL(DL 0.1) | 0.2 1 |
| 17. | Fluoride | mg/L | 0.24 | 1.0 1.5 |
| 18. | Phenolic Compounds | mg/L | BDL(DL 0.001) | 0.001 0.002 |
| 19. | Manganese as Mn | mg/L | BDL(DL 0.01) | 0.1 0.3 |
| 20. | Zinc as Zn | mg/L | BDL(DL 0.01) | 5 15 |
| 21. | Arsenic as As | mg/L | BDL(DL 0.005) | 0.01 0.05 |
| 22. | Cyanide as CN | mg/L | BDL(DL 0.01) | 0.003 No Relaxation |
| 23. | Cadmium as Cd | mg/L | BDL(DL 0.01) | 0.05 No Relaxation |
| 24. | Chromium as Cr | mg/L | BDL(DL 0.02) | 0.03 0.2 |
| 25. | Aluminium | mg/L | BDL(DL 0.005) | 0.01 No Relaxation |
| 26. | Selenium as Se | mg/L | BDL(DL 0.01) | 0.01 No Relaxation |
| 27. | Lead as Pb | mg/L | BDL(DL 0.001) | 0.001 No Relaxation |
| 28. | Mercury as Hg | mg/L | 0.33 | 45 No Relaxation |
| 29. | Nitrate Nitrogen NO ₃ | mg/L | Nil | Shall not be detectable in any 100 mL sample |
| 30. | E.Coli | MPN/100mL | | |

Note:-BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report


Prepared by


Checked by


Authorized Signatory




TEST REPORT

| Name of the Industry | M/s. Mangalore SEZ Limited 3 rd Floor, MUDA Building, Ashok Nagar, Urwa Stores, Mangalore- 575006 | | | |
|-------------------------|---|-----------|---------------|--|
| Address of the Industry | Kalavar (GW) | | | |
| Sample Description | 16.11.2017 | | | |
| Date of Sampling | Hubert Enviro Care Systems (P) Ltd | | | |
| Sample Collected by | 07.12.2017 | | | |
| Report Date | HECS/W/009/071217 | | | |
| Report No | | | | |
| Sl.No. | Parameters monitored | Units | Results | As per IS 10500:2012 standard limit |
| | | | | Acceptable (max) |
| 1. | Colour | Hazen | 1 (DL 1) | 5 15 |
| 2. | pH (at 25 °C) | - | 6.6 | 6.5-8.5 No Relaxation |
| 3. | Electrical Conductivity | µS/cm | 58 | Nil Nil |
| 4. | Odour | - | Agreeable | Agreeable |
| 5. | Taste | - | Agreeable | Agreeable |
| 6. | Turbidity | NTU | BDL (DL 0.1) | 1 5 |
| 7. | Total Dissolved Solids | mg/L | 38 | 500 2000 |
| 8. | Alkalinity as CaCO ₃ | mg/L | 20 | 200 600 |
| 9. | Total Hardness | mg/L | 27 | 200 600 |
| 10. | Calcium as Ca | mg/L | 8.9 | 75 200 |
| 11. | Magnesium as Mg | mg/L | 1.0 | 30 100 |
| 12. | Iron as Fe | mg/L | BDL(DL 0.02) | 0.3 No Relaxation |
| 13. | Sulphate as SO ₄ | mg/L | 2.2 | 200 400 |
| 14. | Chloride as Cl | mg/L | 9 | 250 1000 |
| 15. | Boron as B | mg/L | BDL(DL 0.1) | 0.5 1.0 |
| 16. | Residual free chlorine | mg/L | BDL(DL 0.1) | 0.2 1 |
| 17. | Fluoride | mg/L | 0.22 | 1.0 1.5 |
| 18. | Phenolic Compounds | mg/L | BDL(DL 0.001) | 0.001 0.002 |
| 19. | Manganese as Mn | mg/L | BDL(DL 0.01) | 0.1 0.3 |
| 20. | Zinc as Zn | mg/L | BDL(DL 0.005) | 0.01 0.05 |
| 21. | Arsenic as As | mg/L | BDL(DL 0.01) | 0.05 No Relaxation |
| 22. | Cyanide as CN | mg/L | BDL(DL 0.01) | 0.003 No Relaxation |
| 23. | Cadmium as Cd | mg/L | BDL(DL 0.01) | 0.05 No Relaxation |
| 24. | Chromium as Cr | mg/L | BDL(DL 0.01) | 0.03 0.2 |
| 25. | Aluminium | mg/L | BDL(DL 0.02) | 0.01 No Relaxation |
| 26. | Selenium as Se | mg/L | BDL(DL 0.005) | 0.01 No Relaxation |
| 27. | Lead as Pb | mg/L | BDL(DL 0.01) | 0.01 No Relaxation |
| 28. | Mercury as Hg | mg/L | BDL(DL 0.001) | 0.001 No Relaxation |
| 29. | Nitrate Nitrogen NO ₃ | mg/L | 0.01 | 45 No Relaxation |
| 30. | E.Coli | MPN/100mL | Nil | Shall not be detectable in any 100 mL sample |

Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report


Prepared by


Checked by



TEST REPORT

| Name of the Industry | M/s. Mangalore SEZ Limited 3 rd Floor, MUDA Building, Ashok Nagar, Urwa Stores, Mangalore- 575006 | | | |
|-------------------------|---|-----------|---------------|--|
| Address of the Industry | 10 ml water Reservoir (GW) | | | |
| Sample Description | 16.11.2017 | | | |
| Date of Sampling | Hubert Enviro Care Systems (P) Ltd | | | |
| Sample Collected by | 07.12.2017 | | | |
| Report Date | HECS/W/009/071217 | | | |
| Report No | | | | |
| Sl.No. | Parameters monitored | Units | Results | As per IS 10500:2012 standard limit |
| | | | | Acceptable (max) |
| 1. | Colour | Hazen | (DL 1) | 5 15 |
| 2. | pH (at 25 °C) | | 6.7 | 6.5-8.5 No Relaxation |
| 3. | Electrical Conductivity | µS/cm | 107 | NIL NIL |
| 4. | Odour | | Agreeable | Agreeable |
| 5. | Taste | | Agreeable | Agreeable |
| 6. | Turbidity | NTU | 38.2 | 1 5 |
| 7. | Total Dissolved Solids | mg/L | 70 | 500 2000 |
| 8. | Alkalinity as CaCO ₃ | mg/L | 61 | 200 600 |
| 9. | Total Hardness | mg/L | 81 | 200 600 |
| 10. | Calcium as Ca | mg/L | 18 | 75 200 |
| 11. | Magnesium as Mg | mg/L | 7.9 | 30 100 |
| 12. | Iron as Fe | mg/L | BDL(DL0.02) | 0.3 No Relaxation |
| 13. | Sulphate as SO ₄ | mg/L | 24 | 200 400 |
| 14. | Chloride as Cl | mg/L | 9 | 250 1000 |
| 15. | Boron as B | mg/L | BDL(DL 0.1) | 0.5 1.0 |
| 16. | Residual free chlorine | mg/L | 0.22 | 0.2 1.5 |
| 17. | Fluoride | mg/L | BDL(DL 0.001) | 0.001 0.002 |
| 18. | Phenolic Compounds | mg/L | BDL(DL 0.01) | 0.1 0.3 |
| 19. | Manganese as Mn | mg/L | BDL(DL 0.01) | 5 15 |
| 20. | Zinc as Zn | mg/L | BDL(DL 0.005) | 0.01 0.05 |
| 21. | Arsenic as As | mg/L | BDL(DL 0.01) | 0.05 No Relaxation |
| 22. | Cyanide as CN | mg/L | BDL(DL 0.01) | 0.003 No Relaxation |
| 23. | Cadmium as Cd | mg/L | BDL(DL 0.01) | 0.05 No Relaxation |
| 24. | Chromium as Cr | mg/L | BDL(DL 0.02) | 0.03 0.2 |
| 25. | Aluminium | mg/L | BDL(DL 0.005) | 0.01 No Relaxation |
| 26. | Selenium as Se | mg/L | BDL(DL 0.01) | 0.01 No Relaxation |
| 27. | Lead as Pb | mg/L | BDL(DL 0.001) | 0.001 No Relaxation |
| 28. | Mercury as Hg | mg/L | 0.02 | 45 No Relaxation |
| 29. | Nitrate Nitrogen NO ₃ | mg/L | Nil | Shall not be detectable in any 100 mL sample |
| 30. | E.Coli | MPN/100mL | | |

Note:-BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
MPN- Most Probable Number; mL-Milliliter


CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Prepared by

Checked by

Authorized Signatory



5. MONITORING SCHEDULE OF MANGALORE SEZ LIMITED
ENVIRONMENTAL MONITORING

| Sl.No | Environmental Attributes monitored | Parameters analyzed and presented in analysis Report | Monitoring requirement |
|-------|------------------------------------|--|---|
| 1 | Ambient Air Quality | PM _{2.5} , PM ₁₀ , SO ₂ , NO ₂ , CO, O ₃ , NH ₃ , Pb, As, Ni, Benzene, B(a)P | Two Locations/Month, 24 hrs/day |
| 2 | Surface/ Ground Water Quality | Colour, pH (at 25 °C), Odour, Taste, Turbidity, Total Dissolved Solids, Alkalinity as CaCO ₃ , Total Hardness, Calcium as Ca, Magnesium as Mg, Iron as Fe, Sulphate as SO ₄ , Chloride as Cl, Boron as B, Residual free chlorine, Fluoride, Phenolic Compounds, Carbon monoxide, Manganese as Mn, Zinc as Zn, Arsenic as As, Cyanide as CN, Cadmium as Cd, Chromium as Cr, Aluminium as Al, Selenium as Se, Lead as Pb, Mercury as Hg, Nitrate Nitrogen NO ₃ , E.Coli | Ten Locations, Seasons (Summer, Winter, Post monsoon), By using Grab Sampling technique |
| 3 | Ambient Noise Level | Noise Level (db) in Day and Night | Two Locations, Seasons (Summer, Winter, Post monsoon), Fortnightly interval |



ANNEXURE



Speed Post

No Q.1501B/4/2014-SPW

Government of India

Ministry of Environment, Forest & Climate Change
CP DivisionIndira Paryavaran Bhawan,
Prithvi, 2nd Floor,
Jorbagh Road, Aliganj,
New Delhi-110 003.
Dated: 18th August, 2016**To,**

M/s Hubert Enviro Care Systems Pvt. Ltd.
No. C-45, Industrial Estate, Balkampady,
Mangalore- 575011,
Karnataka.

Subject: Recognition of M/s Hubert Enviro Care Systems Pvt. Ltd. No. C-45, Industrial Estate, Balkampady, Mangalore- 575011, Karnataka as Environmental Laboratory under the Environment (Protection) Act, 1986 - reg.

Sir,


Kindly refer to your letter no. M/ Dated 17.12.2014 approval for recognition of laboratory under Environment (Protection) Act, 1986 Based on the recommendation of the 44th meeting of Expert Committee for recognition of environmental laboratories held on 09.10.2015 & 14.10.2015 and your acceptance of the terms & conditions at Annexure -III, IV&V of guidelines for recognition of environmental laboratories under the Environment (Protection) Act, 1986 this Ministry approves the recognition of your laboratory for five years as shall be notified in the Gazette of India.

2. The laboratory shall compulsorily participate in the Analytical Quality Control (AQC) exercise conducted by the Central Pollution Control Board, at least once a year to ascertain the capability of the laboratory and analysis from time to time and to provide quarterly progress reports of your laboratory to the MoEF&CC.

3. Periodic surveillance of recognized Environmental Laboratory under Environment (Protection) Act, 1986 will be undertaken by MoEF&CC/Central Pollution Control Board (CPCB) to assess its proper functioning, systematic operation and reliability of data generated at the laboratory.

4. It is also mandatory for the laboratory to renew NABL, ISO 9001:2008, ISO 14001:2004 and OHSAS from time to time.

Yours faithfully,


 (Dr. (Ms.) Rubab Jaffer),
 Deputy Director



NABL

National Accreditation Board for Testing and Calibration Laboratories

(An Autonomous Body under Department of Science & Technology, Govt. of India)

CERTIFICATE OF ACCREDITATION

HUBERT ENVIRO CARE SYSTEMS (P) LIMITED

has been assessed and accredited in accordance with the standard

ISO/IEC 17025:2005

"General Requirements for the Competence of Testing & Calibration Laboratories"

for its facilities at

No. C-45, Industrial Estate, Baikampady, Mangalore, Karnataka

in the discipline of

CHEMICAL TESTING

(To see the scope of accreditation of this laboratory, you may also visit NABL website www.nabl-india.org)

Certificate Number T-3180

Issue Date 31/10/2016



Valid Until 30/10/2018

This certificate remains valid for the Scope of Accreditation as specified in the annexure subject to continued satisfactory compliance to the above standard & the additional requirements of NABL.

Signed for and on behalf of NABL

N. Venkateswaran
N. Venkateswaran
Program Manager

Anil Relia
Anil Relia
Director

S. K. Joshi
Prof. S. K. Joshi
Chairman



रा.प्र.प्र.वो.

राष्ट्रीय परीक्षण और अंशशोधन प्रयोगशाला प्रत्यायन बोर्ड

(विज्ञान एवं प्रौद्योगिकी विभाग, भारत सरकार के अधीन स्वायतंशासी निकाय)

प्रत्यायन प्रमाण-पत्र

हबर्ट एन्वायरो केयर सिस्टम्स (प्रा.) लिमिटेड

का मूल्यांकन और प्रत्यायन निम्न मानक के अनुसार

आई.एस.ओ./आई.इ.सी. 17025:2005

“परीक्षण एवं अशशोधन प्रयोगशालाओं की सक्षमता की सामान्य अपेक्षाएँ”

मैंगलोर, कर्नाटक

में स्थित इसकी सुविधाओं के लिए

रासायनिक परीक्षण

के विषय क्षेत्र में किया गया।

(इस प्रयोगशाला के प्रस्तावन के विषय क्षेत्र की जानकारी एवं ए.यी एस वेबसाइट www.ncbi-india.org से भी प्राप्त कर सकते हैं)

प्रभाण-पत्र संख्या

प.3180

जारी करने की तिथि

31/10/2016



वैधता की तिथि 30/10/2018

यह प्रमाण-पत्र उपर्युक्त मानक तथा राष्ट्रीय परीक्षण और अंशशोधन प्रयोगशाला प्रत्यायन बोर्ड की अतिरिक्त अपेक्षाओं का निरंतर संतोषपूर्द अनुपालन किए जाने पर अनुबंध में निर्विच्छानुसार प्रत्यायन के क्षेत्र के लिए वैध रहेगा।

रा.प्र.प्र.बो. की ओर से हस्ताक्षरित

1947-1952-237

एन. वेंकटेस्वरन
कार्यक्रम प्रबन्धक

३० अ वृत्तिरूप

अनिल रेलिया
निवेशक

संग्रहीत
प्राप्ति

प्रो. श्रीकृष्ण जोशी
अध्यक्ष



Item wise Details of CSR Activities and Proposed time bound Action plan

5% of Approved MSEZL Phase I Project Cost (Rs 15227.5 Crores): Rs 76.375 Crores

| Item wise Details of CSR Activities and Proposed time bound Action Plan | | | | | | | | | | |
|--|--|-----------------------|------------------------------|------------------------|---------------------------------|-----------------------------------|-------------------------------------|-------------------------------------|-------------------------|---------|
| 5% of Approved MSEZL Phase I project Cost (Rs 1527.5 Crores)- Rs 76.375 Crores | | | | | | | | | | |
| S. No. | Description | Proposed CSR Expenses | Amount incl. in Project Cost | Expenses till Oct 2012 | Expenses from Oct 2012-Feb 2014 | Expenses from Feb 2014-March 2015 | Expenses from March 2015-April 2016 | Expenses from April-2016-March 2017 | Total expense till Date | Balance |
| 1 | Water Supply Facilities | | | | | | | | | |
| 1.1 | RCC Over Head water tanks including main supply pipeline in a. Permeade, Bajpe & Kulai Villages & 45 Acre, Drain work b/w HPCL colony & ODC,ford | 2.00 | 1.00 | 0.85 | 0.99 | 0.145 | 0.110 | 0.220 | 2.32 | 0.000 |
| 1.2 | Drinking Water facilities For neighboring Villages 6 acres & 9.58 Acres R&R Colony | 1.50 | 2.20 | 1.20 | 0.26 | 0.04 | 0.00 | 0.370 | 1.87 | -0.37 |
| 1.3 | c Provision of Bore wells in Permeade & Bajpe Villages | 0.70 | 0.17 | 0.00 | 0.550 | 0.000 | | | 0.70 | 0.00 |
| 2 | Sanitation facilities | | | | | | | | | |
| 2.1 | a Development of Under Ground Drainage | 4.09 | 4.09 | 2.60 | 1.08 | 0.00 | 0.13 | 0.25 | 4.06 | 0.03 |
| 2.2 | b Skid mounted STPs for Kulai & Bajpe Villages | 0.60 | 0.60 | 0.17 | 0.00 | 0.235 | 0.077 | 0.48 | 0.12 | 0.07 |
| 3 | Community Facilities | | | | | | | | | |
| 3.1 | Creation of self employment facilities by provision of suitable shops in Kulai & Permeade villages | 0.11 | 0.11 | 0.00 | 0.00 | 0.00 | | | 0.11 | 0.00 |
| 3.2 | Sponsoring of Community facilities including Primary Health Centre, Primary School, Post Office, GravYard, compound wall, temple, Drain work near Bajana mandir, jotted, road repair near swayamlingeshwara temple,bajpe etc etc | 4.00 | 4.00 | 0.00 | 3.85 | 0.150 | 0.000 | | 4.00 | 0.00 |
| 3.3 | c Any Miscellaneous Development works to Local communities | 0.50 | 0.50 | 0.00 | 0.00 | 0.500 | 0.000 | | 0.50 | 0.00 |
| 4 | Educational Sponsorship | | | | | | | | | |
| 4.1 | a Up gradation of Skills & Technical training facilities for local youth. | 6.00 | 6.00 | 5.53 | 0.00 | 0.260 | 0.002 | 0.030 | 5.82 | 0.18 |
| 4.2 | Bypass Road for connectivity between Suratkal to Bajpe for Public use. | 36.98 | 36.98 | 17.84 | 7.26 | 0.00 | 0.00 | | 25.10 | 11.88 |
| 5 | Events Sponsorship | | | | | | | | | |
| 5.1 | Improvement of facilities for various Religious places for local communities and sponsoring traditional ceremonies' of local communities. | 2.00 | 1.37 | 1.37 | 0.00 | 0.530 | 0.000 | | 1.90 | 0.10 |
| 5.2 | Sponsoring of various local events in the major Educational Institutions, Cultural functions, Traditional events, Medical camps, Distribution of Plantations etc in nearby schools & Villages in and around Mangalore. | 2.00 | 0.95 | 0.95 | 0.00 | 0.903 | 0.129 | 0.065 | 2.05 | -0.05 |
| 6 | Sponsoring education and cultural activities to local fishermen Community | 2.97 | 2.93 | 1.27 | 1.36 | 0.40 | 0.21 | | 3.24 | -0.27 |
| 7 | Development roads in surrounding villages & Panchayat roads in Katesee, Permeade & Kuthethoor Villages and villages enroute River water Pipeline | 12.93 | 2.79 | 2.79 | 9.54 | 0.402 | 0.085 | | 12.82 | 0.11 |
| 8 | Total | 76.38 | 63.52 | 34.85 | 24.34 | 4.10 | 0.705 | 0.935 | 64.96 | 11.73 |

ओएनजीसी मंगलूर पेट्रोकेमिकल्स लिमिटेड
(मंगलूर रिफाइनरी एण्ड पेट्रोकेमिकल्स लिमिटेड की सहायक कंपनी)

ONGC Mangalore Petrochemicals Limited

(A Subsidiary of Mangalore Refinery and Petrochemicals Ltd.)

एमएसईजेड, पेर्मुदे, मंगलूर MSEZ, Permude, Mangaluru - 574 509 CIN: U40107KA2006PLC041258
दूरभाष Landline: 0824-2872000, फैक्स: 0824-2872005, Website: www.ompl.co.in

Date: 15/7/2017

REF: OMPL/PCB/SP/2017-18/

To:
The Environmental Officer
Regional Office
KSPCB
Baikampady, Mangalore-11

Dear Sir,

Sub: Submission of Environmental Monitoring Report for the Month of June, 2017, Production Report for June 2017 & Returns Regarding Water Consumed for the Month of June, 2017


Ref: KSPCB Combined Consent Order No. AW-301949 dated 27th January, 2017

With respect to the above subject; we are herewith submitting the following Environmental Monitoring Reports, Production Reports & Returns Regarding Water Consumed in the Month of June 2017 respectively, enclosed herewith.

1. Ambient Air Quality Monitoring at 5 different locations in and around OMPL, enclosed as Annexure- A
2. Water Analysis Reports at 9 different locations in and around OMPL, as Annexure-B
3. Noise Level Monitoring Report at OMPL, as Annexure-C
4. Treated Effluent Analysis Report – D
5. Returns Regarding Water Consumed, for the Month of June 2017, as Annexure-E
6. Production Report as Annexure-F

Thanking You,


Nivapakash
Manager (Env)


28/7/17

REGIONAL OFFICE
Karnataka State Pollution Control Board
Plot No. 10, B. Baikampady Industrial Area
MANGALURU - 574 511

CC: Member Secretary, KSPCB, Bangalore
CC: Head (Technical), MSEZ
CC: CEO, OMPL for info
CC: COO, OMPL for info

ANNEXURES - A

Hubert Enviro Care Systems (P) Ltd.

C-46, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

Laboratory Services Division

Accredited by NABL in the fields of Chemical
 ISO 9001, 14001 & OHSAS 18001 Certified.

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | OMPL - East Side |
| Report Date | 01.07.2017 |
| Report No | HECS/AA/001/010717 |

CONSOLIDATED TEST RESULTS: JUNE 2017

| Parameters | NAAQS | JUNE '17 - Week | | 22-Week | | 23-Week | | 24-Week | | 25-Week | | 26-Week | | Average Value |
|--|-------|-----------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|
| | | 01.06.17 | 05.06.17 | 08.06.17 | 12.06.17 | 15.06.17 | 19.06.17 | 22.06.17 | 27.06.17 | 29.06.17 | 27.06.17 | 29.06.17 | 27.06.17 | |
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60 | 19.3 | 22.0 | 24.8 | 22.9 | 23.1 | 23.6 | 25.2 | 24.7 | 23.4 | 23.22 | 23.22 | 23.22 | |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 56.4 | 57.2 | 60.7 | 59.8 | 56.4 | 61.3 | 59.8 | 60.5 | 61.4 | 59.27 | 59.27 | 59.27 | |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.5 | 3.2 | 3.6 | 3.4 | 3.6 | 3.5 | 3.7 | 3.1 | 3.4 | 3.44 | 3.44 | 3.44 | |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.6 | 3.5 | 3.8 | 3.5 | 3.3 | 3.7 | 3.9 | 3.4 | 3.6 | 3.58 | 3.58 | 3.58 | |
| CO (mg/m^3) | 2.0 | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100 | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400 | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | |
| Pb ($\mu\text{g}/\text{m}^3$) | 1.0 | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | |
| As (ng/m^3) | 6.0 | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | |
| N ⁺ (nm^3) | 20 | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | |
| Benzene ($\mu\text{g}/\text{m}^3$) | 05 | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | |
| B(a)P (ng/m^3) | 01 | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | BDL | |

Note: BDL = Below detection limit; DL - Detection limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂ - Sulphur dioxide; NO₂ - Nitrogen-dl-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³); O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$); NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$); As-Arsenic (DL 0.1 ng/m³); Ni-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(a)P- Benzo - α -pyrene (DL 0.1 ng/m³); ng/m³: nanogram per cubic meter;

CONCLUSION: All the parameters meet the NAAQ Standards

*****End of Report *****

Deep
Prepared by

Checked by



Carla
Authorized Signatory

1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization
2. Samples are not drawn by HECS unless or otherwise mentioned
3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report
4. Under no circumstances lab accepts any liability or loss/damage caused by use or misuse of test report after involving or issue of test report
5. The test results relate only to the test items

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

Laboratory Services Division

Accredited by NABL in the fields of Chemical
 ISO 9001, 14001 & OHSAS 18001 Certified.

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | Shantigudda |
| Report Date | 01.07.2017 |
| Report No | HECS/AA/002/010717 |

CONSOLIDATED TEST RESULTS: JUNE 2017

| JUNE '17 - Week | | 22-Week | 23-Week | | 24-Week | | 25-Week | | 26-Week | | Average Value |
|--|-------|----------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|
| Parameters | NAAQS | 01.06.17 | 05.06.17 | 08.06.17 | 12.06.17 | 15.06.17 | 19.06.17 | 22.06.17 | 27.06.17 | 29.06.17 | |
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60 | 21.4 | 22.2 | 21.8 | 21.6 | 20.5 | 21.6 | 21.9 | 20.7 | 21.3 | 21.44 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 58.2 | 59.6 | 61.8 | 62.3 | 61.4 | 61.4 | 61.9 | 62.8 | 61.3 | 61.18 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 2.9 | 3.2 | 3.3 | 3.4 | 3.6 | 3.1 | 3.5 | 3.0 | 3.2 | 3.24 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.4 | 3.5 | 3.7 | 3.2 | 3.1 | 3.5 | 3.3 | 3.4 | 3.6 | 3.41 |
| CO (mg/m^3) | 2.0 | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100 | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400 | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1.0 | BDL |
| As (ng/m^3) | 6.0 | BDL |
| ng (ng/m^3) | 20 | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 05 | BDL |
| B(a)P (ng/m^3) | 01 | BDL |

Note: BDL = Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂ - Sulphur dioxide; NO₂ - Nitrogen-di-oxide; CO - Carbon-Mono Oxide(DL 0.1 mg/m³); O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$); NH₃-Ammonia-(DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$); As-Arsenic (DL 0.1 ng/m³); Ni-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(a)P- Benzo - α -pyrene (DL 0.1 ng/m³); ng/m³: nanogram per cubic meter;

CONCLUSION: All the parameters meet the NAAQ Standards

*****End of Report *****

Prepared by
Sreej

Checked by
heli



Authorized Signatory

- The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization.
- Samples are not drawn by HECS unless or otherwise mentioned.
- Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report.
- Under no circumstances lab accepts any liability or loss/damage caused by use or misuse of test report after invoicing or issue of test report.
- The test results relate only to the test items.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | Tenka Ekkar |
| Report Date | 01.07.2017 |
| Report No | HECS/AA/003/010717 |

CONSOLIDATED TEST RESULTS: JUNE 2017

| JUNE '17 - Week | | 22-Week | 23-Week | | 24-Week | | 25-Week | | 26-Week | | Average Value |
|--|-------|----------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|
| Parameters | NAAQS | 01.06.17 | 05.06.17 | 08.06.17 | 12.06.17 | 15.06.17 | 19.06.17 | 22.06.17 | 27.06.17 | 29.06.17 | |
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60 | 21.4 | 20.5 | 21.4 | 21.8 | 22.6 | 23.4 | 22.3 | 21.7 | 22.5 | 21.95 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 60.4 | 61.9 | 62.6 | 61.9 | 62.3 | 61.4 | 60.8 | 62.5 | 61.9 | 61.74 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.2 | 3.5 | 3.6 | 3.5 | 3.4 | 3.5 | 3.3 | 3.6 | 3.4 | 3.44 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.7 | 3.5 | 3.6 | 3.5 | 3.2 | 3.4 | 3.6 | 3.3 | 3.5 | 3.47 |
| CO (mg/m^3) | 2.0 | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100 | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400 | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1.0 | BDL |
| As (ng/m^3) | 6.0 | BDL |
| Ni (ng/m^3) | 20 | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 05 | BDL |
| B(a)P (ng/m^3) | 01 | BDL |

Note: BDL =Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂-Sulphur dioxide; NO₂- Nitrogen-dil-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³);O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$);NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$);As-Arsenic (DL 0.1 $\mu\text{g}/\text{m}^3$);Ni-Nickel (DL 0.5 $\mu\text{g}/\text{m}^3$); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(a)P- Benzo -a-pyrene (DL 0.1 $\mu\text{g}/\text{m}^3$); ng/m³: nanogram per cubic meter; $\mu\text{g}/\text{m}^3$: microgram per cubic meter.

CONCLUSION: All the parameters meet the NAAQ Standards

*****End of Report *****

Prepared by

Checked by



Authorized Signatory

- The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization.
- Samples are not drawn by HECS unless or otherwise mentioned.
- Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report.
- Under no circumstances lab accepts any liability or loss / damage caused by use or misuse of test report after Invoicing or issue of test report.
- The test results relate only to the test items.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | Premude Village |
| Report Date | 01.07.2017 |
| Report No | HECS/AA/004/010717 |

CONSOLIDATED TEST RESULTS: JUNE 2017

| JUNE '17 - Week | | 22-Week | 23-Week | | 24-Week | | 25-Week | | 26-Week | | Average Value |
|--|-------|----------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|
| Parameters | NAAQS | 01.06.17 | 05.06.17 | 08.06.17 | 12.06.17 | 15.06.17 | 19.06.17 | 22.06.17 | 27.06.17 | 29.06.17 | |
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60 | 21.4 | 21.6 | 22.4 | 23.8 | 22.7 | 21.6 | 22.5 | 23.4 | 22.7 | 22.45 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 60.7 | 61.2 | 60.8 | 61.6 | 62.5 | 61.8 | 60.5 | 61.9 | 60.8 | 61.31 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.5 | 3.6 | 3.3 | 3.4 | 3.6 | 3.7 | 3.5 | 3.3 | 3.7 | 3.51 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.3 | 3.2 | 3.3 | 3.5 | 3.4 | 3.6 | 3.5 | 3.4 | 3.3 | 3.38 |
| CO (mg/m^3) | 2.0 | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100 | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400 | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1.0 | BDL |
| As (ng/m^3) | 6.0 | BDL |
| NI (ng/m^3) | 20 | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 05 | BDL |
| B(a)P (ng/m^3) | 01 | BDL |

Note: BDL =Below detection limit; DL = Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂ Sulphur dioxide; NO₂ - Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³); O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$); NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$); As-Arsenic (DL 0.1 ng/m³); Ni-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(a)P- Benzo - α -pyrene (DL 0.1 ng/m³); ng/m³: nanogram per cubic meter;

CONCLUSION: All the parameters meet the NAAQ Standards

*****End of Report*****

Shy
Prepared by

Checked by



Authorized Signatory

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | OMPL - West Side |
| Report Date | 01.07.2017 |
| Report No. | HECS/AA/005/010717 |

CONSOLIDATED TEST RESULTS: JUNE 2017

| JUNE '17 - Week | | 22-Week | 23-Week | | 24-Week | | 25-Week | | 26-Week | | Average Value |
|--|-------|----------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|
| Parameters | NAAQS | 01.06.17 | 05.06.17 | 08.06.17 | 12.06.17 | 15.06.17 | 19.06.17 | 22.06.17 | 27.06.17 | 29.06.17 | |
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60 | 22.7 | 21.4 | 20.6 | 22.5 | 21.3 | 22.8 | 21.5 | 22.2 | 21.6 | 21.84 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 61.4 | 60.3 | 62.8 | 61.5 | 62.3 | 61.6 | 60.4 | 61.9 | 62.7 | 61.65 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.3 | 3.5 | 3.4 | 3.6 | 3.3 | 3.4 | 3.5 | 3.4 | 3.6 | 3.44 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.4 | 3.6 | 3.5 | 3.2 | 3.1 | 3.4 | 3.5 | 3.2 | 3.4 | 3.36 |
| CO (mg/m^3) | 2.0 | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100 | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400 | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1.0 | BDL |
| As (ng/m^3) | 6.0 | BDL |
| Ni (ng/m^3) | 20 | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 05 | BDL |
| B(a)P (ng/m^3) | 01 | BDL |

Note: BDL =Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂ - Sulphur di-oxide; NO₂ - Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³);O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$);NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$);As-Arsenic (DL 0.1 ng/m³);Ni-Nickel (DL 0.5 ng/m³); Benzene (DL 1 $\mu\text{g}/\text{m}^3$); B(a)P- Benzo -a-pyrene (DL 0.1 ng/m³); ng/m³: nanogram per cubic meter;

CONCLUSION: All the parameters meet the NAAQ Standards

*****End of Report *****

Deep
Prepared by

hkh
Checked by



Raju
Authorized Signatory

1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization.
2. Samples are not drawn by HECS unless or otherwise mentioned.
3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report.
4. Under no circumstances lab accept any liability or loss / damage caused by use or misuse of test report after issuing or issue of test report.
5. The test results relate only to the test items.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011,
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
H.O. # 18, 92nd Street, Ashok Nagar, Chennai - 600 083,
Ph: 42986555 Fax : 42985500 E-mail : labsales@hecs.in

Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

TEST REPORT: GROUND WATER MONITORING (GWM)

| | |
|-------------------------|---|
| Name of the Industry | M/s. ONGC, Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | GW1 - Ground Water collected from Narayana Guru Community Hall, Permude |
| Date of Sampling | 20.06.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.07.2017 |
| Report No | HECS/W/001/010717 |


RESULTS


| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|---------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.66 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 1.5 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 36.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 9.2 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 89.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 8.9 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 5.0 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 157.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 13.0 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | 0.42 | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 8.5 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff. 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L - Detection Limit; NTU - Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
MPN - Most Probable Number; mL - Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report


Prepared by


Checked by




Authorized Signatory

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

TEST REPORT: GROUND WATER MONITORING (GWM)

| | |
|-------------------------|---|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | GW2 - Ground Water collected from Gagtel Labor Colony |
| Date of Sampling | 20.06.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.07.2017 |
| Report No | HECS/W/002/010717 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 6.71 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 1.20 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 38.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 8.5 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 39.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 14.6 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 5.4 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 94.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 7.3 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 1.41 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff.2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff.2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L - Detection Limit; NTU - Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
 MPN - Most Probable Number; mL - Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Prepared by

Checked by

Authorized Signatory



Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111; Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

TEST REPORT: GROUND WATER MONITORING (GWM)

| | |
|-------------------------|---|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | GW3- Ground Water collected from L&T New Labor Colony |
| Date of Sampling | 20.06.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.07.2017 |
| Report No. | HECS/W/003/010717 |


RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.74 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 1.34 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 6.5 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 17.0 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 57.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 19.4 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 6.7 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 153.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 9.8 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 1.39 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L - Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
 MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report


Prepared by


Checked by


Authorized Signatory



Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985600 E-mail : labsales@hecs.in

Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

TEST REPORT: GROUND WATER MONITORING (GWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | GW4-Ground Water collected Near OMPL – ETP |
| Date of Sampling | 20.06.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.07.2017 |
| Report No | HECS/W/004/010717 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | | 7.45 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | BDL (DL 0.1) | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 57.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 14.1 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 47.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 19.5 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 5.25 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 158.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 8.12 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 2.25 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
 MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Prepared by

Checked by

Authorized Signatory



- The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization.
- Samples are not drawn by HECS unless or otherwise mentioned.
- Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report.
- Under no circumstances lab accepts any liability or loss / damage caused by use or misuse of test report after invoicing or issue of test report.
- The test results relate only to the test items.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.

Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.

Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

TEST REPORT: OPEN WELL WATER MONITORING (OWWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | OW1- Open Water collected from Tenka Ekkar |
| Date of Sampling | 20.06.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.07.2017 |
| Report No | HECS/W/005/010717 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.49 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 2.54 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 46.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 9.7 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 47 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 9.2 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 6.0 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 83.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 6.15 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 2.10 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
MPN- Most Probable Number; mL-Milliliter

CONCLUSION: OPENWELL WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Prepared by

Checked by

Authorized Signatory



Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

TEST REPORT: OPEN WELL WATER MONITORING (OWWM)

| | |
|-------------------------|---|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | OW2 - Open Water collected from Shantigudda Village |
| Date of Sampling | 20.06.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd. |
| Report Date | 01.07.2017 |
| Report No | HECS/W/006/010717 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.53 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | 2.68 | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | BDL (DL 0.1) | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 34.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 9.35 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 65.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 13.4 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 4.5 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 79.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 6.3 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 2.24 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
 MPN- Most Probable Number; mL-Milliliter

CONCLUSION: OPENWELL WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Prepared by

Checked by

Authorized Signatory



Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985600 E-mail : labsales@hecs.in

Laboratory Services Division

Accredited by NABL in the fields of Chemical
 ISO 9001, 14001 & OHSAS 18001 Certified.

TEST REPORT: OPEN WELL WATER MONITORING (OWWM)


| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | OW3 - Open Water collected from Permude Village |
| Date of Sampling | 20.06.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.07.2017 |
| Report No | HECS/W/007/010717 |

RESULTS


| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.26 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 2.68 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 27.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 8.14 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 23.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 13.0 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 4.1 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 54.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 4.2 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 3.4 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(Raff. 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(Raff 2009) | Per 100mL | Absent | Not Detectable |


Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
 MPN- Most Probable Number; mL-Milliliter

CONCLUSION: OPENWELL WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012


Prepared by

End of Report

 Checked by

 Authorized Signatory



- The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization.
- Samples are not drawn by HECS unless or otherwise mentioned.
- Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report.
- Under no circumstances lab accepts any liability or loss / damage caused by use or misuse of test report after invoicing or issue of test report.
- The test results relate only to the test items.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

TEST REPORT: SURFACE WATER MONITORING (SWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | SW1 - Surface Water collected Near OMPL - Flare Area |
| Date of Sampling | 20.06.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.07.2017 |
| Report No | HECS/W/008/010717 |


RESULTS


| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.42 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 2.5 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 199 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 54.0 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 126.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 18.0 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 9.5 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 574 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 75.6 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | 0.33 | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 2.26 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | 0.14 | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note: BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per liter; NA-Not Available

CONCLUSION: SURFACE WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report


Prepared by


Checked by


Authorized Signatory



Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.

Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.

Ph: 42985565 Fax : 42985500 E-mail : labsales@hecs.in

Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

TEST REPORT: SURFACE WATER MONITORING (SWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | SW2 - Surface Water collected Near OMPL - Near Central Warehouse |
| Date of Sampling | 20.06.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.07.2017 |
| Report No | HECS/W/009/010717 |

RESULTS

| No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-----|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.04 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 3.9 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 78 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 16.4 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 33 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 72.0 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 8.2 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 181 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 65 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 4.26 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | 0.17 | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coli form Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:-BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per liter

CONCLUSION: SURFACE WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS:10500:2012

End of Report

Prepared by

Checked by



Authorized Signatory

- The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization.
- Samples are not drawn by HECS unless or otherwise mentioned.
- Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report.
- Under no circumstances lab accepts any liability or loss / damage caused by use or misuse of test report after invoicing or issue of test report.
- The test results relate only to the test items.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.

Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.

Ph: 42985555 Fax: 42985500 E-mail : labsales@hecs.in

Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

TEST REPORT: NOISE MONITORING

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Noise Monitoring |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | OMPL – North, South, East and West sides |
| Sampling Date | 20.06.2017 |
| Report Date | 01.07.2017 |
| Report No. | HECS/N/001/010717 |

NOISE MONITORING: JUNE 2017

| S.No. | Sampling Location | MoEF requirements in dB | | Avg. Noise level observed in dB | |
|-------|-------------------|-------------------------|-------|---------------------------------|-------|
| | | Day | Night | Day | Night |
| 1. | OMPL-North | | | 65.8 | 63.5 |
| 2. | OMPL-South | | | 64.5 | 62.2 |
| 3. | OMPL-East | 75 | 70 | 67.4 | 65.8 |
| 4. | OMPL-West | | | 66.6 | 64.4 |

Note: dB: Decibel

CONCLUSION: All the parameters meet MoEF Standards

*****End of Report*****

Prepared by

Checked by

Authorized Signatory



Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

Laboratory Services Division

Accredited by NABL in the fields of Chemical
 ISO 9001, 14001 & OHSAS 18001 Certified.

TEST REPORT: ETP EFFULENT MONITORING (ETP EM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Guard Pond Pump Discharge (ETP Effluent) |
| Date of Sampling | 10.06.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.07.2017 |
| Report No | HECS/W/011/010717 |

RESULTS

| No. | Parameters monitored | Test method followed | Units | Results | Permissible Limit |
|-----|--|------------------------------------|-------------|--------------|--|
| 1. | Color | IS:3025:(Pt 4)1983 (Reaff 2006) | Hazen Units | 4.0 | All efforts should be made to remove colour and unpleasant odour as far as practicable |
| 2. | Odour | IS 3025 (Part5)-1983, Reaff 2006 | - | Agreeable | |
| 3. | Total suspended Solids | 2540D APHA 22nd Edn.. 2012 | mg/L | 9.4 | 100 |
| 4. | pH | IS:3025:(Pt 11):1983 (Reaff 2006) | - | 6.82 | 6.0-8.5 |
| 5. | Temperature | IS 3025 (Pt.9):1983 (Reaff:2006) | °C | 32.0 | Shall not exceed 5 degree Centigrade above the receiving water temperature |
| 6. | Oil & Grease | IS 3025,4(Pt 39):2000 (Reaff 2009) | mg/L | BDL(DL 1) | 5 |
| 7. | Total Residual Chlorine as Cl ₂ | IS:3025 (Pt26)1986 (Reaff 2009) | mg/L | BDL (DL 0.1) | 1 |
| 8. | Ammonical Nitrogen as N | IS 3025 Part (34)1988 | mg/L | 8.9 | 50 |
| 9. | Total Kjeldhal Nitrogen as N | IS 3025 Part (34)1988 | mg/L | 23.0 | 100 |
| 10. | Free Ammonia as NH ₃ | IS:3025 (Part34)1998 Reaff. 2003 | mg/L | BDL(DL 0.02) | 5 |
| 11. | BOD, 3 days @ 27°C as O ₂ | IS:3025 (Pt 44)1993 (Reaff 2009) | mg/L | 11.0 | 30 |
| 12. | COD as O ₂ | IS 3025 Part (58)2006 | mg/L | 50.0 | 125 |
| 13. | Lead as Pb | IS:3025 (Pt 47)1994 (Reaff 2009) | mg/L | BDL(DL 0.1) | 0.1 |
| 14. | Chromium (Hexavalent) as Cr ⁶⁺ | IS 3025 Part (52):2003 | mg/L | BDL(DL 0.01) | 0.1 |
| 15. | Total Chromium as Cr | IS 3025(Pt52):2003 (Reaff 2009) | mg/L | BDL(DL 0.01) | 2.0 |
| 16. | Copper as Cu | IS:3025.5,(Pt 42)1992 (Reaff 2009) | mg/L | BDL(DL 0.05) | 1.0 |
| 17. | Zinc as Zn | IS:3025 (Part49)1994 (Reaff 2009) | mg/L | BDL(DL 0.1) | 5.0 |

Prepared by

Checked by

Authorized Signatory



- The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization.
- Samples are not drawn by HECS unless or otherwise mentioned.
- Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report.
- Under no circumstances lab accepts any liability or loss / damage caused by use or misuse of test report after invoicing or issue of test report.
- The test results refers only to the test items.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

TEST REPORT: ETP EFFULENT MONITORING (ETP EM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Guard Pond Pump Discharge (ETP Effluent) |
| Date of Sampling | 10.06.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.07.2017 |
| Report No | HECS/W/011/010717 |

RESULTS

| No. | Parameters monitored | Test method followed | Units | Results | Permissible Limit |
|-----|-----------------------------------|-----------------------------------|-------|---------------------------|--|
| 18. | Nickel as Ni | IS:3025 (Part54)2003 (Reaff 2009) | mg/L | BDL(DL 0.05) | 1.0 |
| 19. | Fluoride as F- | IS 3025 part (60):2008 | mg/L | BDL(DL 0.2) | 1.0 |
| 20. | Sulphide as S ²⁻ | IS:3025 (Pt 29)1986 (Reaff 2009) | mg/L | BDL(DL 0.04) | 2.0 |
| 21. | Particle Size of Suspended solids | APHA 22nd Edition | - | Passed through 850 micron | 850 micron |
| 22. | Arsenic as As | IS:3025 (Part37)1988(Reaff 2009) | mg/L | BDL(DL 0.005) | 0.2 |
| 23. | Mercury as Hg | IS:3025 (Part48)1994 RA 1999 | mg/L | BDL(DL 0.001) | 0.01 |
| 24. | Cadmium as Cd | IS:3025 (Part41)1991 | mg/L | BDL(DL 0.01) | 0.1 |
| 25. | Selenium as Se | IS:3025 (Part56)2003 | mg/L | BDL(DL 0.005) | 0.05 |
| 26. | Cyanide as CN | IS:3025 (Part27)1986 Reaff. 2009 | mg/L | BDL(DL 0.01) | 0.2 |
| 27. | Phenolic Compounds as C6H5OH | IS 3025 Part (43)1992,RA 2009 | mg/L | BDL(DL 0.001) | 0.35 |
| 28. | Total Iron as Fe | IS 3025(Pt 53):2003(Reaff-2009) | mg/L | 0.28 | 3 |
| 29. | Manganese | IS:3025:(Pt-59):2006 | mg/L | BDL(DL 0.01) | 2 |
| 30. | Total Phosphorous as P | IS 3025(Pt 31):1988(Reaff 2009) | mg/L | BDL(DL 0.01) | 3 |
| 31. | Nitrate | IS 3025 (Pt 34):1988 (Reaff 2009) | mg/L | BDL(DL 1) | 20 |
| 32. | Vanadium as V | IS:3025 (Part56)2003 | mg/L | BDL(DL 0.01) | 0.1 |
| 33. | Benzo(a)pyrene | USEPA 8270C | mg/L | BDL(DL 0.0001) | 0.2 |
| 34. | Benzene | USEPA 8270C | mg/L | BDL(DL 0.0001) | 0.1 |
| 35. | Bioassay Test | IS 6582(Part 2):2001 | Tf | 9.5 | 90% survival of fish after 96 hrs in 100% effluent |

Note:-BDL - Below Detection Limit; D.L- Detection Limit; mg/L - Milligrams per liter

CONCLUSION: ETP OUTLET EFFULENT WATER AS ABOVE PARAMETERS ARE WITHIN STANDARDS

End of Report

Prepared by

Checked by



Authorized Signatory

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: krc@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

Laboratory Services Division


Accredited by NABL in the fields of Chemical
 ISO 9001, 14001 & OHSAS 18001 Certified.


TEST REPORT: ETP EFFLUENT MONITORING (ETP EM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Guard Pond Pump Discharge (ETP Effluent) |
| Date of Sampling | 20.06.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.07.2017 |
| Report No. | HECS/W/015/010717 |


RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | Permissible Limit |
|-------|--|------------------------------------|-------------|--------------|--|
| 1. | Color | IS:3025:(Pt 4)1983 (Reaff 2006) | Hazen Units | 3.2 | All efforts should be made to remove colour and unpleasant odour as far as practicable |
| 2. | Odour | IS 3025 (Part5)-1983; Reaff 2006 | | Agreeable | |
| 3. | Total suspended Solids | 2540D APHA 22nd Edn.. 2012 | mg/L | 9.4 | 100 |
| 4. | pH | IS:3025:(Pt 11):1983 (Reaff 2006) | | 7.59 | 6.0-8.5 |
| 5. | Temperature | IS 3025 (Pt.9):1983 (Reaff:2006) | °C | 30.0 | Shall not exceed 5 degree Centigrade above the receiving water temperature |
| 6. | Oil & Grease | IS 3025,4(Pt 39):2000 (Reaff 2009) | mg/L | BDL(DL 1) | 5 |
| 7. | Total Residual Chlorine as Cl ₂ | IS:3025 (Pt26)1986 (Reaff 2009) | mg/L | BDL (DL 0.1) | 1 |
| 8. | Ammonical Nitrogen as N | IS 3025 Part (34)1988 | mg/L | 9.2 | 50 |
| 9. | Total Kjeldhal Nitrogen as N | IS 3025 Part (34)1988 | mg/L | 19.5 | 100 |
| 10. | Free Ammonia as NH ₃ | IS:3025 (Part34)1998 Reaff. 2003 | mg/L | BDL(DL 0.02) | 5 |
| 11. | BOD, 3 days @ 27°C as O ₂ | IS:3025 (Pt 44)1993 (Reaff 2009) | mg/L | 11.1 | 30 |
| 12. | COD as O ₂ | IS 3025 Part (58)2006 | mg/L | 54 | 125 |
| 13. | Lead as Pb | IS:3025 (Pt 47)1994 (Reaff 2009) | mg/L | BDL(DL 0.1) | 0.1 |
| 14. | Chromium (Hexavalent) as Cr ⁶⁺ | IS 3025 Part (52):2003 | mg/L | BDL(DL 0.01) | 0.1 |
| 15. | Total Chromium as Cr | IS 3025(Pt52):2003 (Reaff 2009) | mg/L | BDL(DL 0.01) | 2.0 |
| 16. | Copper as Cu | IS:3025:5,(Pt 42)1992 (Reaff 2009) | mg/L | BDL(DL 0.05) | 1.0 |
| 17. | Zinc as Zn | IS:3025 (Part49)1994 (Reaff 2009) | mg/L | BDL(DL 0.1) | 5.0 |


Prepared by


Checked by




Authorized Signatory

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O. # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO-9001, 14001 & OHSAS 18001 Certified.

TEST REPORT: ETP EFFLUENT MONITORING (ETP EM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Guard Pond Pump Discharge (ETP Effluent) |
| Date of Sampling | 20.06.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.07.2017 |
| Report No | HECS/W/Q15/010717 |


RESULTS


| S.No. | Parameters monitored | Test method followed | Units | Results | Permissible Limit |
|-------|-----------------------------------|-----------------------------------|-------|---------------------------|--|
| 18. | Nickel as Ni | IS:3025 (Part54)2003 (Reaff 2009) | mg/L | BDL(DL 0.05) | 1.0 |
| 19. | Fluoride as F- | IS 3025 part (60):2008 | mg/L | BDL(DL 0.2) | 1.0 |
| 20. | Sulphide as S ²⁻ | IS:3025 (Pt 29)1986 (Reaff 2009) | mg/L | BDL(DL 0.04) | 2.0 |
| 21. | Particle Size of Suspended solids | APHA 22nd Edition | | Passed through 850 micron | 850 micron |
| 22. | Arsenic as As | IS:3025 (Part37)1988(Reaff 2009) | mg/L | BDL(DL 0.005) | 0.2 |
| 23. | Mercury as Hg | IS:3025 (Part48)1994 RA 1999 | mg/L | BDL(DL 0.001) | 0.01 |
| 24. | Cadmium as Cd | IS:3025 (Part41)1991 | mg/L | BDL(DL 0.01) | 0.1 |
| 25. | Selenium as Se | IS:3025 (Part56)2003 | mg/L | BDL(DL 0.005) | 0.05 |
| 26. | Cyanide as CN | IS:3025 (Part27)1986 Reaff. 2009 | mg/L | BDL(DL 0.01) | 0.2 |
| 27. | Phenolic Compounds as C6H5OH | IS 3025 Part (43)1992,RA 2009 | mg/L | BDL(DL 0.001) | 0.35 |
| 28. | Total Iron as Fe | IS 3025(Pt 53):2003(Reaff 2009) | mg/L | 0.20 | 3 |
| 29. | Manganese | IS:3025:(Pt-59):2006 | mg/L | BDL(DL 0.01) | 2 |
| 30. | Total Phosphorous as P | IS 3025(Pt 31):1988(Reaff 2009) | mg/L | BDL(DL 0.01) | 3 |
| 31. | Nitrate | IS 3025 (Pt 34):1988 (Reaff 2009) | mg/L | BDL(DL 1) | 20 |
| 32. | Vanadium as V | IS:3025 (Part56)2003 | mg/L | BDL(DL 0.01) | 0.1 |
| 33. | Benzo(a)pyrene | USEPA 8270C | mg/L | BDL(DL 0.0001) | 0.2 |
| 34. | Benzene | USEPA 8270C | mg/L | BDL(DL 0.0001) | 0.1 |
| 35. | Bioassay Test | IS 6582(Part 2):2001 | Tf | 9:1 | 90% survival of fish after 96 hrs in 100% effluent |

Note:-BDL - Below Detection Limit; D.L- Detection Limit; mg/L - Milligrams per liter

CONCLUSION: ETP OUTLET EFFLUENT WATER AS ABOVE PARAMETERS ARE WITHIN STANDARDS

End of Report


Prepared by


Checked by




Authorized Signatory

Form-1 (Rule 4)
Returns Regarding Water Consumed during the Month of June, 2017

| Name and address of the Consumer | | Returns Regarding Water Consumed during the Month of June, 2017 | | Quantity of water qualifying for rebate according to the assessee |
|---|--|---|--|---|
| Purpose for which water consumed | Reading at the beginning of the first day of the calendar month under report | Reading at the end of the last day of the calendar month under report | Quantity of Water Consumed in Kilo Letters | |
| Industrial cooling, spraying in inline pits or boiler feed | 0 | 73561 | 73561 | |
| Cooling Water | 0 | 66839 | 66839 | |
| Boiler Feed Water | 0 | 18658 | 18658 | |
| Fire Water | 0 | 4098 | 4098 | |
| Domestic purpose | | | | |
| Drinking Water & Sanitation | | | | |
| Processing water by water gets polluted and the pollutants are easily biodegradable | | | | |
| Total Consumption | | 5890 | 5890 | |
| | | 16947 | 16947 | |
| | | | | Subtracting total flow from BFW, Cr & Drinking water consumption |

Signature of the Consumer

Shri S. Prakash, Manager(Env)

Name

Address

M/s ONGC Mangalore Petrochemicals Limited, Mangalore Special Economic Zone, Permitde, Mangalore -574 508

M/s ONGC Mangalore Petrochemicals Limited, Mangalore Special Economic Zone, Permitde, Mangalore -574 508

ANNEXURE I

ONGC Mangalore Petrochemicals Limited

Production Details for June, 2017

Net Naptha Processed – 1,16,039 MT

| Sl. No. | Name of the Product | Quantity, MT |
|---------|----------------------|--------------|
| 1 | Paraxylene (Product) | 54,499 |
| 2 | Benzene (Co product) | 17,470 |

Rakesh

Vijay Kumar
Ramdas
30/8/17

ओएनजीसी मंगलूर पेट्रोकेमिकल्स लिमिटेड

(मंगलूर रिफाइनरी एण्ड पेट्रोकेमिकल्स लिमिटेड की सहायक कंपनी)

ONGC Mangalore Petrochemicals Limited

(A Subsidiary of Mangalore Refinery and Petrochemicals Ltd.)

एमएसईजे, पेर्मुदे, मंगलूर MSEZ, Permude, Mangaluru - 574 509 CIN: U40107KA2006PLC041258

दूरभाष Landline:- 0824-2872000, फैक्स Fax:- 0824-2872005, Website: www.ompl.co.in

REF: OMPL/PCB/SP/2017-18/

Date: 15/8/2017

To:
The Environmental Officer
Regional Office
KSPCB
Baikampady, Mangalore-11



Dear Sir,

Sub: Submission of Environmental Monitoring Report for the Month of July, 2017, Production Report for July 2017 & Returns Regarding Water Consumed for the Month of July, 2017

Ref: KSPCB Combined Consent Order No. AW-301949 dated 27th January, 2017

With respect to the above subject, we are herewith submitting the following Environmental Monitoring Reports, Production Reports & Returns Regarding Water Consumed in the Month of July 2017 respectively, enclosed herewith.

1. Ambient Air Quality Monitoring at 5 different locations in and around OMPL, enclosed as Annexure-A
2. Water Analysis Reports at 9 different locations in and around OMPL, as Annexure-B
3. Noise Level Monitoring Report at OMPL, as Annexure-C
4. Treated Effluent Analysis Report – D
5. Returns Regarding Water Consumed, for the Month of July 2017, as Annexure-E
6. Production Report as Annexure-F

Thanking You,

Shri Aprakash
Manager (Env)

CC: Member Secretary, KSPCB, Bangalore

CC: Head (Technical), MSEZ

CC: CEO, OMPL for info

CC: COO, OMPL for info

ANNEXURE - A

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 576011.

Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.

Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | OMPL - East Side |
| Report Date | 04.08.2017 |
| Report No | HECS/AA/001/040817 |

CONSOLIDATED TEST RESULTS: JULY 2017

| JULY '17 - Week | | 27-Week | | 28-Week | | 29-Week | | 30-Week | | 31-Week | Average Value |
|--|-------|----------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|
| Parameters | NAAQS | 03.07.17 | 06.07.17 | 10.07.17 | 13.07.17 | 17.07.17 | 20.07.17 | 24.07.17 | 27.07.17 | 31.07.17 | |
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60 | 16.8 | 15.9 | 16.4 | 17.2 | 17.7 | 19.3 | 18.5 | 19.1 | 18 | 17.66 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 45.8 | 47.2 | 46.3 | 47.8 | 47.3 | 46.7 | 46 | 45.5 | 45.9 | 46.5 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 2.7 | 2.6 | 2.8 | 2.7 | 2.9 | 2.6 | 2.8 | 2.7 | 2.9 | 2.74 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 2.9 | 2.8 | 2.8 | 3 | 2.9 | 3 | 2.8 | 3 | 2.9 | 2.9 |
| CO (mg/m^3) | 2.0 | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100 | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400 | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1.0 | BDL |
| As (ng/m^3) | 6.0 | BDL |
| Ni (ng/m^3) | 20 | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 05 | BDL |
| B(a)P (ng/m^3) | 01 | BDL |


Note: BDL = Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂- Sulphur dioxide; NO₂ - Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³); O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$); NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$); As-Arsenic (DL 0.1 ng/m³); Ni-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(a)P- Benzo -a-pyrene (DL 0.1 ng/m³); ng/m³: nanogram per cubic meter; $\mu\text{g}/\text{m}^3$ - microgram per cubic meter

CONCLUSION: All the parameters meet the NAAQ Standards

*****End of Report *****

Shifa
Prepared by

Deep
Checked by



Lavu
Authorized Signatory

1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss / damage caused by use or misuse of test report after Invoicing or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42986555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | Shantigudda |
| Report Date | 04.08.2017 |
| Report No | HECS/AA/002/040817 |

CONSOLIDATED TEST RESULTS: JULY 2017

| JULY '17 - Week | | 27-Week | | 28-Week | | 29-Week | | 30-Week | | 31-Week | Average Value |
|--|-------|----------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|
| Parameters | NAAQS | 03.07.17 | 06.07.17 | 10.07.17 | 13.07.17 | 17.07.17 | 20.07.17 | 24.07.17 | 27.07.17 | 31.07.17 | |
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60 | 18.2 | 17.9 | 18.7 | 19.0 | 16.6 | 17.5 | 16.9 | 17.2 | 18.4 | 17.82 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 47.4 | 48.6 | 46.9 | 46.2 | 45.8 | 47.7 | 48.1 | 46.5 | 47.0 | 47.13 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 2.8 | 2.7 | 3.0 | 2.9 | 3.1 | 2.8 | 3.0 | 2.7 | 2.9 | 2.88 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 2.9 | 3.0 | 3.2 | 2.9 | 2.8 | 3.1 | 2.8 | 3.0 | 2.9 | 2.96 |
| CO (mg/m^3) | 2.0 | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100 | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400 | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1.0 | BDL |
| As (ng/m^3) | 6.0 | BDL |
| Ni (ng/m^3) | 20 | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 05 | BDL |
| B(α)P (ng/m^3) | 01 | BDL |

Note: BDL = Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂- Sulphur dioxide; NO₂ - Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³);O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$);NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$);As-Arsenic (DL 0.1 ng/m³);Ni-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(α)P- Benzo- α -pyrenè (DL 0.1 ng/m³); ng/m³: nanogram per cubic meter; $\mu\text{g}/\text{m}^3$ - microgram per cubic meter

CONCLUSION: All the parameters meet the NAAQ Standards

*****End of Report *****

Shilpa
Prepared by

Devi
Checked by



Lew
Authorized Signatory

- The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization.
- Samples are not drawn by HECS unless or otherwise mentioned.
- Unless specifically requested by customer the test items will not be retained more than 16 days from the date of issue of test report.
- Under no circumstances lab accepts any liability or loss/damage caused by use or misuse of test report after issuing or issue of test report.
- The test results relate only to the test items.
- #not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 576011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
 ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premudé Village, Mangalore - 574509 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | Tenka Ekkar |
| Report Date | 04.08.2017 |
| Report No | HECS/AA/003/040817 |

CONSOLIDATED TEST RESULTS: JULY 2017

| JULY '17 - Week | | 27-Week | | 28-Week | | 29-Week | | 30-Week | | 31-Week | Average Value |
|--|-------|----------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|
| Parameters | NAAQS | 03.07.17 | 06.07.17 | 10.07.17 | 13.07.17 | 17.07.17 | 20.07.17 | 24.07.17 | 27.07.17 | 31.07.17 | |
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60 | 16.6 | 18.1 | 17.4 | 16.1 | 17.9 | 18.5 | 17.3 | 16.4 | 17.0 | 17.26 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 47.1 | 46.4 | 48.9 | 48.1 | 46.8 | 47.5 | 48.6 | 47.7 | 46.9 | 47.56 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.0 | 3.1 | 2.9 | 2.9 | 3.1 | 3.0 | 2.9 | 3.1 | 3.0 | 3.00 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.0 | 3.2 | 3.1 | 3.0 | 3.2 | 3.0 | 3.1 | 3.1 | 3.0 | 3.08 |
| CO (mg/m^3) | 2.0 | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100 | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400 | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1.0 | BDL |
| As (ng/m^3) | 6.0 | BDL |
| W _x (ng/m^3) | 20 | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 05 | BDL |
| B(a)P (ng/m^3) | 01 | BDL |

Note: BDL = Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂ - Sulphur dioxide; NO₂ - Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³); O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$); NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$); As-Arsenic (DL 0.1 ng/m³); Ni-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(a)P- Benzo -a-pyrene (DL 0.1 ng/m³); ng/m³: nanogram per cubic meter; $\mu\text{g}/\text{m}^3$ - microgram per cubic meter

CONCLUSION: All the parameters meet the NAAQ Standards

*****End of Report*****

Shifa
Prepared by

Checked by



Authorized Signatory

[Signature]

1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss / damage caused by use or misuse of test report after invoking or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.

Ph: 0824 - 2408111, Email: krc@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.

Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified

Certificate No. T-3180

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|--|
| Name of the Industry | M/s.ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | Premude Village |
| Report Date | 04.08.2017 |
| Report No | HECS/AA/004/040817 |

CONSOLIDATED TEST RESULTS: JULY 2017

| JULY '17 - Week | | 27-Week | | 28-Week | | 29-Week | | 30-Week | | 31-Week | Average Value |
|--|-------|----------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|
| Parameters | NAAQS | 03.07.17 | 06.07.17 | 10.07.17 | 13.07.17 | 17.07.17 | 20.07.17 | 24.07.17 | 27.07.17 | 31.07.17 | |
| PM _{2.5} (µg/m ³) | 60 | 16.4 | 15.9 | 17.1 | 18.0 | 17.7 | 15.5 | 16.8 | 16.2 | 17.4 | 16.78 |
| PM ₁₀ (µg/m ³) | 100 | 46.4 | 47.1 | 47.7 | 48.3 | 46.9 | 47.3 | 48.4 | 46.8 | 48.0 | 47.43 |
| SO ₂ (µg/m ³) | 80 | 3.0 | 3.2 | 3.1 | 2.9 | 3.2 | 3.0 | 2.9 | 3.1 | 3.0 | 3.04 |
| NO ₂ (µg/m ³) | 80 | 3.0 | 2.9 | 2.9 | 3.1 | 2.9 | 3.0 | 3.1 | 3.1 | 2.9 | 2.99 |
| CO (mg/m ³) | 2.0 | BDL |
| O ₃ (µg/m ³) | 100 | BDL |
| NH ₃ (µg/m ³) | 400 | BDL |
| Pb (µg/m ³) | 1.0 | BDL |
| As (ng/m ³) | 6.0 | BDL |
| IV _i (ng/m ³) | 20 | BDL |
| Benzene (µg/m ³) | 05 | BDL |
| B(a)P (ng/m ³) | 01 | BDL |


Note:- BDL =Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂- Sulphur dioxide; NO₂- Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³);O₃-Ozone(DL 10 µg/m³);NH₃-Ammonia (DL 5 µg/m³); Pb-Lead (DL 0.05 µg/m³);As-Arsenic (DL 0.1 ng/m³);Ni-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 µg/m³); B(a)P- Benzo -a-pyrene (DL 0.1 ng/m³); ng/m³: nanogram per cubic meter; µg/m³ - microgram per cubic meter

CONCLUSION: All the parameters meet the NAAQ Standards

*****End of Report *****

Swipa
Prepared by

Deep
Checked by



[Signature]
Authorized Signatory

- The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization.
- Samples are not drawn by HECS unless or otherwise mentioned.
- Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report.
- Under no circumstances lab accepts any liability or loss/damage caused by use or misuse of test report after involving or issue of test report.
- The test results relate only to the test items.
- #not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.

Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.

Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified

Certificate No. T-3180

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | OMPL - West Side |
| Report Date | 04.08.2017 |
| Report No | HECS/AA/005/040817 |

CONSOLIDATED TEST RESULTS: JULY 2017

| (JULY '17 - Week | | 27-Week | | 28-Week | | 29-Week | | 30-Week | | 31-Week | | Average Value |
|--|-------|----------|----------|----------|----------|----------|----------|----------|----------|----------|--|---------------|
| Parameters | NAAQS | 03.07.17 | 06.07.17 | 10.07.17 | 13.07.17 | 17.07.17 | 20.07.17 | 24.07.17 | 27.07.17 | 31.07.17 | | |
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60 | 16.3 | 17.1 | 17.8 | 15.9 | 16.7 | 15.4 | 17.9 | 16.6 | 15.8 | | 16.61 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 47.2 | 45.3 | 46.8 | 48.1 | 47.6 | 46.3 | 45.9 | 47.0 | 45.7 | | 46.66 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.1 | 2.9 | 2.9 | 3.1 | 3.0 | 3.0 | 2.9 | 3.1 | 3.0 | | 3.00 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 2.8 | 2.7 | 2.7 | 2.9 | 2.7 | 2.9 | 2.8 | 2.8 | 2.9 | | 2.80 |
| CO (mg/m^3) | 2.0 | BDL | | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100 | BDL | | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400 | BDL | | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1.0 | BDL | | BDL |
| As (ng/m^3) | 6.0 | BDL | | BDL |
| (ng/m^3) | 20 | BDL | | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 05 | BDL | | BDL |
| B(a)P (ng/m^3) | 01 | BDL | | BDL |

Note: BDL = Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10-Micron; SO₂-Sulphur dioxde; NO₂- Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³);O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$);NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$);As-Arsenic (DL 0.1 ng/m³);Ni-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(a)P- Benzo-a-pyrene (DL 0.1 ng/m³); ng/m³: nanogram per cubic meter; $\mu\text{g}/\text{m}^3$ - microgram per cubic meter

CONCLUSION: All the parameters meet the NAAQ Standards

*****End of Report*****

Shifa
Prepared by

Checked by



Authorized Signatory

1. The report in full or part shall not be used for any promotional or publicly purpose without written consent by HECS. 2. Samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of receipt of test report. 4. Under no circumstances lab accepts any liability or loss / damage caused by use or misuse of test report after invoicing or issue of test report. 5. The test results relate only to the test items. 6. #not under scope of accreditation.

ANNEXURE - B

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011
 Ph: 0824 - 2408111, Email: krc@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
 ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: GROUND WATER MONITORING (GWM)

| | |
|-------------------------|---|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | GW1 - Ground Water collected from Narayana Guru Community Hall, Permude |
| Date of Sampling | 22.07.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 04.08.2017 |
| Report No | HECS/W/001/040817 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.60 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 1.4 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 34.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 8.9 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 84.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 8.6 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 4.9 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 146.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 12.0 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | 0.40 | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 8.3 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
 MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Shalpa
Prepared by

Dinesh
Checked by



Lair
Authorized Signatory

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011
Ph: 0824 - 2408111, Email: krc@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax: 42985500 E-mail: labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: GROUND WATER MONITORING (GWM)

| | |
|-------------------------|---|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | GW2 - Ground Water collected from Gagtel Labor Colony |
| Date of Sampling | 22.07.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 04.08.2017 |
| Report No | HECS/W/002/040817 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 6.66 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 1.1 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 36.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 8.4 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 36.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 13.2 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 5.2 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 88.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 7.0 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 1.40 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52)-2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
MPN- Most Probable Number; mL-Milliliter


CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Slipper
Prepared by

Checked by

Shyam



R. Karthik
Authorized Signatory

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: GROUND WATER MONITORING (GWM)

| | |
|-------------------------|---|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | GW3- Ground Water collected from L&T New Labor Colony |
| Date of Sampling | 22.07.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 04.08.2017 |
| Report No | HECS/W/003/040817 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.70 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 1.32 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 6.2 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 15.0 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 54.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 17.8 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 6.4 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 140.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 8.9 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 1.35 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coli form Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;

MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Shilpa
Prepared by

Shilpa
Checked by



Authorized Signatory

lal

- The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization.
- Samples are not drawn by HECS unless or otherwise mentioned.
- Unless specifically requested by customer the test items will not be retained more than 16 days from the date of issue of test report.
- Under no circumstances lab accepts any liability or loss / damage caused by use or misuse of test report after invoicing or issue of test report.
- The test results relate only to the test items.
- # not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011
Ph: 0824 - 2408111, Email: krc@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: GROUND WATER MONITORING (GWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | GW4-Ground Water collected Near OMPL – ETP |
| Date of Sampling | 22.07.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 04.08.2017 |
| Report No | HECS/W/004/040817 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.41 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | BDL (DL 0.1) | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | " | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | " | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 53.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 12.8 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 44.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 17.7 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 5.01 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 144.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 7.67 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 2.02 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |


Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS:10500:2012

End of Report

Sweta
Prepared by

Shyam
Checked by



Authorized Signatory

[Signature]

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: OPEN WELL WATER MONITORING (OWWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | OW1- Open Water collected from Tenka Ekkar |
| Date of Sampling | 22.07.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 04.08.2017 |
| Report No | HECS/W/005/040817 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | -- | 7.45 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 2.51 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 43.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 8.8 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 44 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 8.7 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 5.0 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 77.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 5.76 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 2.0 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |


Note:- BDL- Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
MPN- Most Probable Number; mL-Milliliter

CONCLUSION: OPENWELL WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Stamps
Prepared by

Checked by



Authorized Signatory

[Signature]

1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss / damage caused by use or misuse of test report after invoicing or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011

Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.

Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: OPEN WELL WATER MONITORING (OWWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | OW2- Open Water collected from Shantigudda Village |
| Date of Sampling | 22.07.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 04.08.2017 |
| Report No | HECS/W/006/040817 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.48 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | 2.64 | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | BDL (DL 0.1) | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 31.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 8.41 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 60.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 12.2 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 4.1 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 74.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 6.0 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 2.21 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL= Below Detection Limit; D.L= Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L = Milligrams per Liter;


MPN- Most Probable Number; mL-Milliliter

CONCLUSION: OPENWELL WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Sweta
Prepared by

Shyam
Checked by



[Signature]
Authorized Signatory

Hubert Enviro Care Systems (P) Ltd.

C-48, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.



Certificate No. T-3180

TEST REPORT: OPEN WELL WATER MONITORING (OWWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | OW3 - Open Water collected from Permude Village |
| Date of Sampling | 22.07.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 04.08.2017 |
| Report No | HECS/W/007/040817 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|-------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.21 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Haizen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 2.64 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 25.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 7.5 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 21.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 11.7 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 4.2 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 50.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 4.1 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 3.2 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |


Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
MPN- Most Probable Number; mL-Milliliter

CONCLUSION: OPENWELL WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Checked by
Shyam

Prepared by
Shyam



Lalitha
Authorized Signatory

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083,
Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: SURFACE WATER MONITORING (SWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | SW1 - Surface Water collected Near OMPL - Flare Area |
| Date of Sampling | 22.07.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 04.08.2017 |
| Report No | HECS/W/008/040817 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.40 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 2.1 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 176 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 49.0 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 112.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 16.0 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 8.4 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 491 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 68.1 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | 0.31 | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 2.19 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | 0.12 | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per liter; NA-Not Available

CONCLUSION: SURFACE WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Shilpa
Prepared by

Shilpa
Checked by



Signature

Authorized Signatory

1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss/damage caused by use or misuse of test report after invoicing or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax: 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL In the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: SURFACE WATER MONITORING (SWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | SW2 - Surface Water collected Near OMPL - Near Central Warehouse |
| Date of Sampling | 22.07.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 04.08.2017 |
| Report No | HECS/W/009/040817 |

RESULTS

| s.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.07 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 3.7 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 72 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 14.8 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 30 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 66.0 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 7.3 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 165 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 61 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 4.01 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | 0.15 | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L - Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per liter


CONCLUSION: SURFACE WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Slippa
Prepared by

Checked by

Shyf



Authorized Signatory

- The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization.
- Samples are not drawn by HECS unless or otherwise mentioned.
- Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report.
- Under no circumstances lab accepts any liability or loss / damage caused by use or misuse of test report after invoking or issue of test report.
- The test results relate only to the test items.
- #not under scope of accreditation.

ANNEXURE-C

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax: 42985500 E-mail: labsales@hecs.in

Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.



Certificate No. T-3180

TEST REPORT: NOISE MONITORING

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Noise Monitoring |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | OMPL – North, South, East and West sides |
| Sampling Date | 22.07.2017 |
| Report Date | 04.08.2017 |
| Report No. | HECS/N/001/040817 |

NOISE MONITORING: JUNE 2017

| S.No. | Sampling Location | MoEF requirements in dB | | Avg. Noise level observed in dB | |
|-------|-------------------|-------------------------|-------|---------------------------------|-------|
| | | Day | Night | Day | Night |
| 1. | OMPL-North | 75 | 70 | 66.1 | 63.9 |
| 2. | OMPL-South | | | 63.9 | 62.0 |
| 3. | OMPL-East | | | 67.8 | 66.2 |
| 4. | OMPL-West | | | 66.1 | 63.9 |

Note: dB: Decibel

CONCLUSION: All the parameters meet MoEF Standards

*****End of Report*****

Shilpa
Prepared by

Reuf
Checked by



Lavu
Authorized Signatory

1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss / damage caused by use or misuse of test report after issuing or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.

ANNEXURE - D

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

**Laboratory Services Division**

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: ETP EFFLUENT MONITORING (ETP EM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Guard Pond Pump Discharge (ETP Effluent) |
| Date of Sampling | 22.07.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 04.08.2017 |
| Report No | HECS/W/015/040817 |

RESULTS

| No. | Parameters monitored | Test method followed | Units | Results | Permissible Limit |
|-----|--|------------------------------------|-------------|--------------|--|
| 1. | Color | IS:3025:(Pt 4)1983 (Reaff 2006) | Hazen Units | 3.1 | All efforts should be made to remove colour and unpleasant odour as far as practicable |
| 2. | Odour | IS 3025 (Part5)-1983, Reaff 2006 | - | Agreeable | |
| 3. | Total suspended Solids | 2540D APHA 22nd Edn.. 2012 | mg/L | 9.0 | 100 |
| 4. | pH | IS:3025:(Pt 11):1983 (Reaff 2006) | - | 7.54 | 6.0-8.5 |
| 5. | Temperature | IS 3025 (Pt 9):1983 (Reaff:2006) | °C | 29.0 | Shall not exceed 5 degree Centigrade above the receiving water temperature |
| 6. | Oil & Grease | IS 3025,4(Pt 39):2000 (Reaff 2009) | mg/L | BDL(DL 1) | 5 |
| 7. | Total Residual Chlorine as Cl ₂ | IS:3025 (Pt26)1986 (Reaff 2009) | mg/L | BDL (DL 0.1) | 1 |
| 8. | Ammonical Nitrogen as N | IS 3025 Part (34)1988 | mg/L | 8.9 | 50 |
| 9. | Total Kjeldhal Nitrogen as N | IS 3025 Part (34)1988 | mg/L | 17.6 | 100 |
| 10. | Free Ammonia as NH ₃ | IS:3025 (Part34)1998 Reaff. 2003 | mg/L | BDL(DL 0.02) | 5 |
| 11. | BOD, 3 days @ 27°C as O ₂ | IS:3025 (Pt 44)1993 (Reaff 2009) | mg/L | 10.0 | 30 |
| 12. | COD as O ₂ | IS 3025 Part (58)2006 | mg/L | 50 | 125 |
| 13. | Lead as Pb | IS:3025 (Pt 47)1994 (Reaff 2009) | mg/L | BDL(DL 0.1) | 0.1 |
| 14. | Chromium (Hexavalent) as Cr ⁶⁺ | IS 3025 Part (52):2003 | mg/L | BDL(DL 0.01) | 0.1 |
| 15. | Total Chromium as Cr | IS 3025(Pt52):2003 (Reaff 2009) | mg/L | BDL(DL 0.01) | 2.0 |
| 16. | Copper as Cu | IS:3025:5,(Pt 42)1992 (Reaff 2009) | mg/L | BDL(DL 0.05) | 1.0 |
| 17. | Zinc as Zn | IS:3025 (Part49),1994 (Reaff 2009) | mg/L | BDL(DL 0.1) | 5.0 |

Sweta
Prepared by

Checked by
Surf



Surf
Authorized Signatory

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011
Ph: 0824 - 2408111, Email: krc@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: ETP EFFLUENT MONITORING (ETP EM)

| | |
|-------------------------|--|
| Name of the Industry | M/s: ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Guard Pond Pump Discharge (ETP Effluent) |
| Date of Sampling | 22.07.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 04.08.2017 |
| Report No | HECS/W/015/040817 |

RESULTS

| No. | Parameters monitored | Test method followed | Units | Results | Permissible Limit |
|-----|-----------------------------------|-----------------------------------|-------|---------------------------|--|
| 18. | Nickel as Ni | IS:3025 (Part54)2003 (Reaff 2009) | mg/L | BDL(DL 0.05) | 1.0 |
| 19. | Fluoride as F- | IS 3025 part (60):2008 | mg/L | BDL(DL 0.2) | 1.0 |
| 20. | Sulphide as S ²⁻ | IS:3025 (Pt 29)1986 (Reaff 2009) | mg/L | BDL(DL 0.04) | 2.0 |
| 21. | Particle Size of Suspended solids | APHA 22nd Edition | | Passed through 850 micron | 850 micron |
| 22. | Arsenic as As | IS:3025 (Part37)1988(Reaff 2009) | mg/L | BDL(DL 0.005) | 0.2 |
| 23. | Mercury as Hg | IS:3025 (Part48)1994 RA 1999 | mg/L | BDL(DL 0.001) | 0.01 |
| 24. | Cadmium as Cd | IS:3025 (Part41)1991 | mg/L | BDL(DL 0.01) | 0.1 |
| 25. | Selenium as Se | IS:3025 (Part56)2003 | mg/L | BDL(DL 0.005) | 0.05 |
| 26. | Cyanide as CN | IS:3025 (Part27)1986 Reaff. 2009 | mg/L | BDL(DL 0.01) | 0.2 |
| 27. | Phenolic Compounds as C6H5OH | IS 3025 Part (43)1992,RA 2009 | mg/L | BDL(DL 0.001) | 0.35 |
| 28. | Total Iron as Fe | IS 3025(Pt 53):2003(Reaff 2009) | mg/L | 0.19 | 3 |
| 29. | Manganese | IS:3025:(Pt-59):2006 | mg/L | BDL(DL 0.01) | 2 |
| 30. | Total Phosphorous as P | IS 3025(Pt 31):1988(Reaff 2009) | mg/L | BDL(DL 0.01) | 3 |
| 31. | Nitrate | IS 3025 (Pt 34):1988 (Reaff 2009) | mg/L | BDL(DL 1) | 20 |
| 32. | Vanadium as V | IS:3025 (Part56)2003 | mg/L | BDL(DL 0.01) | 0.1 |
| 33. | Benzo(a)pyrene | USEPA 8270C | mg/L | BDL(DL 0.0001) | 0.2 |
| 34. | Benzene | USEPA 8270C | mg/L | BDL(DL 0.0001) | 0.1 |
| 35. | Bioassay Test | IS 6582(Part 2):2001 | Tf | 9:1 | 90% survival of fish after 96 hrs in 100% effluent |

Note:-BDL - Below Detection Limit; D.L- Detection Limit; mg/L - Milligrams per liter

CONCLUSION: ETP OUTLET EFFLUENT WATER AS ABOVE PARAMETERS ARE WITHIN STANDARDS

End of Report

Shripa
Prepared by

Deep
Checked by



Deep
Authorized Signatory

- The report in full or part shall not be used for any promotional or publicly purpose without written consent by HECS organization.
- Samples are not drawn by HECS unless or otherwise mentioned.
- Unless specifically requested by customer the test items will not be retained more than 16 days from the date of issue of test report.
- Under no circumstances lab accepts any liability or loss/damage caused by use or misuse of test report after involving or issue of test report.
- The test results relate only to the test items.
- #not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax: 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: ETP EFFULENT MONITORING (ETP EM)


| | |
|-------------------------|--|
| Name of the Industry :: | M/s. ONGC Mangalore Pétrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Guard Pond Pump Discharge (ETP Effluent) |
| Date of Sampling | 08.07.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 04.08.2017 |
| Report No. | HECS/W/011/040817 |

RESULTS

| s.No. | Parameters monitored | Test method followed | Units | Results | Permissible Limit |
|-------|--|------------------------------------|-------------|--------------|--|
| 1. | Color | IS:3025:(Pt 4)1983 (Reaff 2006) | Hazen Units | 3.0 | All efforts should be made to remove colour and unpleasant odour as far as practicable |
| 2. | Odour | IS 3025 (Part5)-1983, Reaff 2006 | | Agreeable | |
| 3. | Total suspended Solids | 2540D APHA 22nd Edn., 2012 | mg/L | 8.9 | 100 |
| 4. | pH | IS:3025:(Pt 11):1983 (Reaff 2006) | | 6.80 | 6.0-8.5 |
| 5. | Temperature | IS 3025 (Pt 9):1983 (Reaff:2006) | °C | 30.0 | Shall not exceed 5 degree Centigrade above the receiving water temperature |
| 6. | Oil & Grease | IS 3025,4(Pt 39):2000 (Reaff 2009) | mg/L | BDL(DL 1) | 5 |
| 7. | Total Residual Chlorine as Cl ₂ | IS:3025 (Pt26)1986 (Reaff 2009) | mg/L | BDL (DL 0.1) | 1 |
| | Ammonical Nitrogen as N | IS 3025 Part (34)1988 | mg/L | 8.5 | 50 |
| 9. | Total Kjeldhal Nitrogen as N | IS 3025 Part (34)1988 | mg/L | 21.0 | 100 |
| 10. | Free Ammonia as NH ₃ | IS:3025 (Part34)1998 Reaff. 2003 | mg/L | BDL(DL 0.02) | 5 |
| 11. | BOD, 3 days @ 27°C as O ₂ | IS:3025 (Pt 44)1993 (Reaff 2009) | mg/L | 10.0 | 30 |
| 12. | COD as C ₂ | IS 3025 Part (58)2006 | mg/L | 47.0 | 125 |
| 13. | Lead as Pb | IS:3025 (Pt 47)1994 (Reaff 2009) | mg/L | BDL(DL 0.1) | 0.1 |
| 14. | Chromium (Hexavalent) as Cr ⁶⁺ | IS 3025 Part (52):2003 | mg/L | BDL(DL 0.01) | 0.1 |
| 15. | Total Chromium as Cr | IS 3025(Pt52):2003 (Reaff 2009) | mg/L | BDL(DL 0.01) | 2.0 |
| 16. | Copper as Cu | IS:3025:5,(Pt 42)1992 (Reaff 2009) | mg/L | BDL(DL 0.05) | 1.0 |
| 17. | Zinc as Zn | IS:3025 (Part49)1994 (Reaff 2009) | mg/L | BDL(DL 0.1) | 5.0 |

Shiva
Prepared by

Shiv
Checked by



Authorized Signatory

1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss/damage caused by use or misuse of test report after involving or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600083.
Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: ETP EFFULENT MONITORING (ETP EM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Guard Pond Pump Discharge (ETP Effluent) |
| Date of Sampling | 08.07.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 04.08.2017 |
| Report No | HECS/W/011/040817 |

RESULTS

| No. | Parameters monitored | Test method followed | Units | Results | Permissible Limit |
|-----|-----------------------------------|-----------------------------------|-------|---------------------------|--|
| 18. | Nickel as Ni | IS:3025 (Part54)2003 (Reaff 2009) | mg/L | BDL(DL 0.05) | 1.0 |
| 19. | Fluoride as F- | IS 3025 part (60);2008 | mg/L | BDL(DL 0.2) | 1.0 |
| 20. | Sulphide as S ²⁻ | IS:3025 (Pt 29)1986 (Reaff 2009) | mg/L | BDL(DL 0.04) | 2.0 |
| 21. | Particle Size of Suspended solids | APHA 22nd Edition | | Passed through 850 micron | 850 micron |
| 22. | Arsenic as As | IS:3025 (Part37)1988(Reaff 2009) | mg/L | BDL(DL 0.005) | 0.2 |
| 23. | Mercury as Hg | IS:3025 (Part48)1994 RA 1999 | mg/L | BDL(DL 0.001) | 0.01 |
| 24. | Cadmium as Cd | IS:3025 (Part41)1991 | mg/L | BDL(DL 0.01) | 0.1 |
| 25. | Selenium as Se | IS:3025 (Part56)2003 | mg/L | BDL(DL 0.005) | 0.05 |
| 26. | Cyanide as CN | IS:3025 (Part27)1986 Reaff. 2009 | mg/L | BDL(DL 0.01) | 0.2 |
| 27. | Phenolic Compounds as C6H5OH | IS 3025 Part (43)1992,RA 2009 | mg/L | BDL(DL 0.001) | 0.35 |
| 28. | Total Iron as Fe | IS 3025(Pt 53):2003(Reaff 2009) | mg/L | 0.26 | 3 |
| 29. | Manganese | IS:3025:(Pt-59):2006 | mg/L | BDL(DL 0.01) | 2 |
| 30. | Total Phosphorous as P | IS 3025(Pt 31):1988(Reaff 2009) | mg/L | BDL(DL 0.01) | 3 |
| 31. | Nitrate | IS 3025 (Pt 34):1988 (Reaff 2009) | mg/L | BDL(DL 1) | 20 |
| 32. | Vanadium as V | IS:3025 (Part56)2003 | mg/L | BDL(DL 0.01) | 0.1 |
| 33. | Benzo(a)pyrene | USEPA 8270C | mg/L | BDL(DL 0.0001) | 0.2 |
| 34. | Benzene | USEPA 8270C | mg/L | BDL(DL 0.0001) | 0.1 |
| 35. | Bioassay Test | IS 6582(Part 2):2001 | Tf | 9:1 | 90% survival of fish after 96 hrs in 100% effluent |

Note:-BDL - Below Detection Limit; D.L- Detection Limit; mg/L- Milligrams per liter

CONCLUSION: ETP OUTLET EFFULENT WATER AS ABOVE PARAMETERS ARE WITHIN STANDARDS

End of Report

Shilpa
Prepared by

Checked by



Authorized Signatory

- The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization.
- Samples are not drawn by HECS unless or otherwise mentioned.
- Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report.
- Under no circumstances lab accepts any liability or loss / damage caused by use or misuse of test report after Invoicing or issue of test report.
- The test results relate only to the test items.
- #not under scope of accreditation.

ANNEXURE - E

Form-1 (Rule 4)
Returns Regarding Water Consumed during the Month of June, 2017

| Name and address of the Consumer | Purpose for which water consumed | Reading at the beginning of the first day of the calendar month under report | Reading at the end of the last day of the calendar month under report | Quantity of Water Consumed in Kilo Letters | If the meter was out of order, the monthly average consumption of water for the previous 3 months of the working period | Quantity of water qualifying for rebate according to the aforesaid | Remarks |
|--|---|--|---|--|---|--|---------|
| M/s ONGC Mangalore Petrochemicals Limited, Mangalore Special Economic Zone, Perrmude, Mangalore -574 509 | Industrial cooling, spraying in mine pits or boiler feed | 0 | 66714 | 66714 | | | |
| | Cooling Water | 0 | 86038 | 86038 | | | |
| | Boiler Feed Water | 0 | 24637 | 24637 | | | |
| | Fire Water | 0 | 2759 | 2759 | | | |
| | Domestic purpose | 0 | | | | | |
| | Drinking Water & Sanitation | | | | | | |
| | Processing industry water gets polluted and the pollutants are easily biodegradable | | | | | | |
| | Service Water | | | 4126 | 4126 | | |
| | Total Consumption | | | 184304 | 184304 | | |

Signature of the Consumer

Name

Shrikar Parkash, Manager(Env)
M/s ONGC Mangalore Petrochemicals Limited, Mangalore Special Economic Zone, Perrmude, Mangalore -574 509

Address


ANNEXURE-1

ONGC Mangalore Petrochemicals Limited

Production Details for July, 2017

Net Naptha Processed – 86,309 MT

| Sl. No. | Name of the Product | Quantity; MT |
|---------|----------------------|--------------|
| 1 | Paraxylene (Product) | 52,533 |
| 2 | Benzene (Co product) | 13,117 |

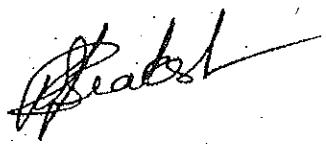A handwritten signature in black ink, appearing to read "Rakesh".

ओएनजीसी मंगलूर पेट्रोकेमिकल्स लिमिटेड

(मंगलूर रिफाइनरी एण्ड पेट्रोकेमिकल्स लिमिटेड की सहायक कंपनी)

ONGC Mangalore Petrochemicals Limited


(A Subsidiary of Mangalore Refinery and Petrochemicals Ltd.)

एनजीसीएल, पेरुदि, मंगलूर MSEZ, Pernude, Mangaluru - 574 509 CIN: U40107KA2006PLC041258
दूरभाष Landline:- 0824-2872000, फैक्स: Fax:- 0824-2872005, Website: www.ompl.co.in

REF: OMPL/PCB/SP/2017-18/

Date: 11/09/2017

To:
The Environmental Officer
Regional Office
KSPCB
Baikampady, Mangalore-11

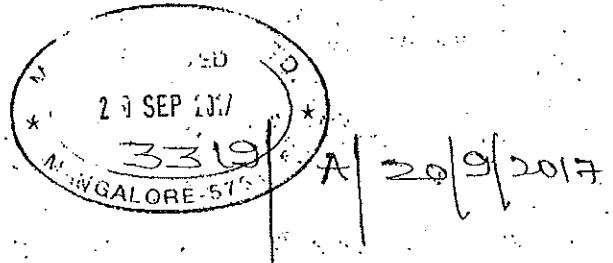

Dear Sir,

Sub: Submission of Environmental Monitoring Report for the Month of August, 2017, Production Report for August 2017 & Returns Regarding Water Consumed for the Month of August, 2017

Ref: KSPCB Combined Consent Order No. AW-301949 dated 27th January, 2017

With respect to the above subject, we are herewith submitting the following Environmental Monitoring Reports, Production Reports & Returns Regarding Water Consumed in the Month of August 2017 respectively, enclosed herewith.

1. Ambient Air Quality Monitoring at 5 different locations in and around OMPL, enclosed as Annexure- A
2. Water Analysis Reports at 9 different locations in and around OMPL, as Annexure-B
3. Noise Level Monitoring Report at OMPL, as Annexure-C
4. Stack Monitoring Report as Annexure-D
5. Treated Effluent Analysis Report – E
6. Returns Regarding Water Consumed, for the Month of August 2017, as Annexure-F
7. Production Report as Annexure-G

Thanking You,

Shiva Prakash
Manager (Env)

Vinay Kumar
Chetan Dabholkar
Devendra

CC: Member Secretary, KSPCB, Bangalore
CC: Head (Technical), MSEZ
CC: CEO, OMPL for info
CC: COO, OMPL for info

ANNEAURE-A

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax : 42985500 E-mail: labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | OMPL - East Side |
| Report Date | 05.09.2017 |
| Report No | HECS/AA/001/050917 |

CONSOLIDATED TEST RESULTS: AUGUST 2017

| AUGUST'17 - Week | | 31-Week | 32-Week | | 33-Week | | 34-Week | | 35-Week | | Average Value |
|--|-------|----------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|
| Parameters | NAAQS | 03.08.17 | 07.08.17 | 10.08.17 | 14.08.17 | 17.08.17 | 21.08.17 | 24.08.17 | 28.08.17 | 31.08.17 | |
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60 | 16.2 | 15.9 | 16.7 | 16.4 | 15.5 | 15.2 | 16.0 | 16.9 | 15.8 | 16.07 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 43.6 | 45.0 | 44.2 | 44.7 | 43.9 | 43.3 | 42.8 | 43.5 | 44.4 | 43.93 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 2.8 | 2.6 | 2.7 | 2.7 | 2.8 | 2.9 | 2.8 | 2.7 | 2.6 | 2.73 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.0 | 2.8 | 2.9 | 2.9 | 2.8 | 3.0 | 2.8 | 2.9 | 3.0 | 2.90 |
| CO (mg/m^3) | 2.0 | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100 | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400 | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1.0 | BDL |
| As (ng/m^3) | 6.0 | BDL |
| Ni (ng/m^3) | 20 | BDL |
| Benzene ($\text{n}\text{g}/\text{m}^3$) | 05 | BDL |
| B(a)P (ng/m^3) | 01 | BDL |

Note: BDL =Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂-Sulphur dioxide; NO₂- Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³);O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$);NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$); As-Arsenic (DL 0.1 ng/m³);Ni-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(a)P- Benzo - α -pyrène (DL 0.1 ng/m^3); ng/m³: nanogram per cubic meter; $\mu\text{g}/\text{m}^3$ - microgram per cubic meter

CONCLUSION: All the parameters meet the NAAQ Standards


*****End of Report*****

Sampled by

Prepared by

Checked by

Authorized Signatory



- The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization.
- Samples are not drawn by HECS unless otherwise mentioned.
- Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report.
- Under no circumstances can HECS be held liable or loss/damage caused by use or misuse of test report after Invoicing or issue of test report.
- The test results relate only to the test items.
- #not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.

Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O. # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.

Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | Shantigudda |
| Report Date | 05.09.2017 |
| Report No | HECS/AA/002/050917 |

CONSOLIDATED TEST RESULTS: AUGUST 2017

| AUGUST '17 - Week | | 31-Week | 32-Week | | 33-Week | | 34-Week | | 35-Week | | Average Value |
|--|-------|----------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|
| Parameters | NAAQS | 03.08.17 | 07.08.17 | 10.08.17 | 14.08.17 | 17.08.17 | 21.08.17 | 24.08.17 | 28.08.17 | 31.08.17 | |
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60 | 15.9 | 16.4 | 17.0 | 16.7 | 16.2 | 16.5 | 15.1 | 15.6 | 17.3 | 16.30 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 45.2 | 44.7 | 44.3 | 45.0 | 45.9 | 46.3 | 45.6 | 44.8 | 44.0 | 45.09 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.0 | 2.9 | 2.9 | 2.8 | 3.0 | 3.0 | 2.8 | 2.9 | 2.8 | 2.90 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.1 | 3.0 | 2.9 | 3.2 | 3.1 | 2.9 | 2.9 | 3.0 | 3.1 | 3.02 |
| CO (mg/m^3) | 2.0 | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100 | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400 | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1.0 | BDL |
| As (ng/m ³) | 6.0 | BDL |
| Ni (ng/m ³) | 20 | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 05 | BDL |
| B(a)P (ng/m ³) | 01 | BDL |

Note: BDL =Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂ ($\mu\text{g}/\text{m}^3$); As-Arsenic (DL 0.1 ng/m³); Ni-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(a)P- Benzo -a-pyrene (DL 0.1 ng/m³); ng/m³: nanogram per cubic meter;


CONCLUSION: All the parameters meet the NAAQ Standards

*****End of Report *****

Sampled by

Prepared by

Checked by

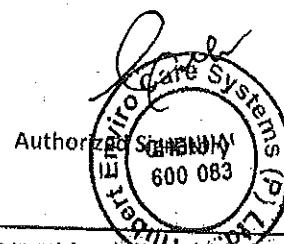

- The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization.
- Samples are not drawn by HECS unless otherwise mentioned.
- Unless specifically requested by customer the test items will not be retained more than 16 days from the date of issue of test report.
- Under no circumstances lab accepts any liability or loss/damage caused by use or misuse of test report after involving or issue of test report.
- The test results relate only to the test items.
- #not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | Tenka Ekkar |
| Report Date | 05.09.2017 |
| Report No | HECS/AA/003/050917 |

CONSOLIDATED TEST RESULTS: AUGUST 2017

| AUGUST '17 - Week | | 31-Week | 32-Week | | 33-Week | | 34-Week | | 35-Week | | Average Value |
|--|-------|----------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|
| Parameters | NAAQS | 03.08.17 | 07.08.17 | 10.08.17 | 14.08.17 | 17.08.17 | 21.08.17 | 24.08.17 | 28.08.17 | 31.08.17 | |
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60 | 14.8 | 15.0 | 15.8 | 16.0 | 15.4 | 13.8 | 14.2 | 13.5 | 14.9 | 14.82 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 45.8 | 44.6 | 45.3 | 46.0 | 46.5 | 45.7 | 44.8 | 46.2 | 45.5 | 45.60 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.0 | 2.9 | 2.9 | 3.0 | 2.8 | 2.9 | 3.0 | 2.8 | 2.8 | 2.90 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.2 | 3.0 | 3.2 | 3.1 | 3.1 | 3.0 | 3.2 | 3.1 | 3.0 | 3.10 |
| CO (mg/m^3) | 2.0 | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100 | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400 | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1.0 | BDL |
| As (ng/m^3) | 6.0 | BDL |
| Ni (ng/m^3) | 20 | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 05 | BDL |
| B(α)P (ng/m^3) | 01 | BDL |

Note: BDL =Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂ $\mu\text{g}/\text{m}^3$; NO₂ - Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m^3); O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$); NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$); As-Arsenic (DL 0.1 ng/m^3); Ni-Nickel (DL 0.5 ng/m^3); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(α)P- Benzo - α -pyrene (DL 0.1 ng/m^3); ng/m³, nanogram per cubic meter;

CONCLUSION: All the parameters meet the NAAQ Standards


*****End of Report *****

Sampled by

Prepared by

Checked by

Authorized Signature



1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization 2. Samples are not drawn by HECS unless otherwise mentioned 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances shall any liability or loss/damage caused by use or misuse of test report after issuing or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | Premude Village |
| Report Date | 05.09.2017 |
| Report No | HECS/AA/004/050917 |

CONSOLIDATED TEST RESULTS: AUGUST 2017

| AUGUST '17 - Week | | 31-Week | 32-Week | | 33-Week | | 34-Week | | 35-Week | | Average Value |
|--|-------|----------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|
| Parameters | NAAQS | 03.08.17 | 07.08.17 | 10.08.17 | 14.08.17 | 17.08.17 | 21.08.17 | 24.08.17 | 28.08.17 | 31.08.17 | |
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60 | 15.1 | 14.9 | 14.2 | 15.3 | 16.0 | 15.8 | 15.4 | 14.7 | 14.1 | 15.06 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 47.1 | 46.3 | 46.9 | 45.2 | 45.8 | 46.5 | 47.0 | 46.1 | 45.4 | 46.26 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.1 | 3.2 | 3.1 | 3.0 | 3.0 | 3.2 | 3.1 | 3.0 | 3.1 | 3.09 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 2.9 | 3.1 | 3.0 | 3.1 | 3.1 | 3.0 | 2.9 | 3.1 | 3.0 | 3.02 |
| CO (mg/m^3) | 2.0 | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100 | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400 | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1.0 | BDL |
| As (ng/m^3) | 6.0 | BDL |
| N ⁺ (g/m^3) | 20 | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 05 | BDL |
| B(a)P (ng/m^3) | 01 | BDL |

Note: BDL =Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂ $\mu\text{g}/\text{m}^3$; NO₂ - Nitrogen-di-oxide; CO - Carbon-Mono Oxide(DL 0.1 mg/m³); O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$); NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$ - microgram per cubic meter)


CONCLUSION: All the parameters meet the NAAQ Standards

*****End of Report *****

Sampled by

Prepared by

Checked by

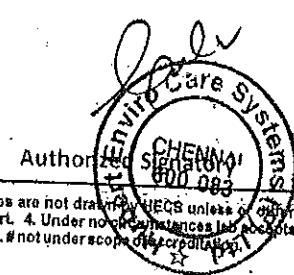

- The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization.
- Samples are not drawn by HECS unless otherwise mentioned.
- Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report.
- Under no circumstances lab accepts any liability or loss/damage caused by use or misuse of test report after invoicing or issue of test report.
- The test results relate only to the test items.
- # not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.

Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.

Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | OMPL - West Side |
| Report Date | 05.09.2017 |
| Report No | HECS/AA/005/050917 |

CONSOLIDATED TEST RESULTS: AUGUST 2017

| AUGUST '17 - Week | | 31-Week | 32-Week | | 33-Week | | 34-Week | | 35-Week | | Average Value |
|--|-------|----------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|
| Parameters | NAAQS | 03.08.17 | 07.08.17 | 10.08.17 | 14.08.17 | 17.08.17 | 21.08.17 | 24.08.17 | 28.08.17 | 31.08.17 | |
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60 | 15.3 | 15.9 | 16.4 | 15.7 | 15.0 | 14.1 | 14.8 | 14.6 | 15.4 | 15.24 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 45.4 | 44.8 | 44.3 | 45.1 | 45.9 | 46.3 | 45.6 | 44.5 | 45.0 | 45.21 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 2.9 | 2.9 | 3.0 | 3.1 | 3.0 | 2.9 | 3.0 | 2.9 | 2.9 | 2.96 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 2.9 | 2.8 | 2.7 | 2.7 | 2.8 | 2.9 | 2.8 | 2.7 | 2.9 | 2.80 |
| CO (mg/m^3) | 2.0 | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100 | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400 | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1.0 | BDL |
| As (ng/m^3) | 6.0 | BDL |
| Ni (ng/m^3) | 20 | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | .05 | BDL |
| B(α)P (ng/m^3) | 01 | BDL |

Note: BDL =Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron; PM₁₀-Particulate matter size less than 10 Micron; SO₂-Sulphur dioxide; NO₂- Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³); O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$); NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$); As-Arsenic (DL 0.1 ng/m³); Ni-Nickel (DL 0.5 ng/m³); Benzene-[DL 1 $\mu\text{g}/\text{m}^3$]; B(α)P- Benzo- α -pyrene (DL 0.1 ng/m³); ng/m³: nanogram per cubic meter; $\mu\text{g}/\text{m}^3$ - microgram per cubic meter


CONCLUSION: All the parameters meet the NAAQ Standards

*****End of Report *****

Sampled by

Prepared by

Checked by

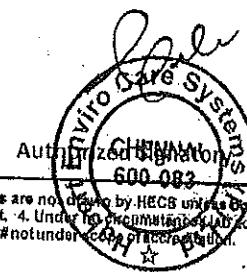

- The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization.
- Samples are not retained by HECS unless otherwise mentioned.
- Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report.
- Liability or loss/damage caused by use or misuse of test report after Invoicing or issue of test report.
- The test results relate only to the test items.
- No under no circumstances accept any liability.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

ANNEXURE - F

Laboratory Services Division

Accredited by NABL in the fields of Chemical
 ISO 9001, 14001 & OHSAS 18001 Certified.

TEST REPORT: GROUND WATER MONITORING (GWM)

| | |
|-------------------------|---|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | GW1 - Ground Water collected from Narayana Guru Community Hall, Permude |
| Date of Sampling | 16.08.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 05.09.2017 |
| Report No | HECS/W/001/050917 |

RESULTS

| S.No. | Parameter's monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.65 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 max |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 1.5 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 37.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 9.6 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 90.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 9.1 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 5.2 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 157.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 13.0 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | 0.42 | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 8.9 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L- Milligrams per Liter;


MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Shiva
Prepared by

Checked by



Ree
Authorized Signatory

Hubert Enviro Care Systems (P) Ltd.
 C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

Laboratory Services Division
 Accredited by NABL in the fields of Chemical
 ISO 9001, 14001 & OHSAS 18001 Certified.

TEST REPORT: GROUND WATER MONITORING (GWM)

| | |
|-------------------------|---|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | GW2 - Ground Water collected from Gagtel Labor Colony |
| Date of Sampling | 16.08.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 05.09.2017 |
| Report No. | HECS/W/002/050917 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 6.70 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 max |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 1.2 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 39.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 9.0 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 40.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 14.3 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 5.4 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 96.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 8.0 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 1.42 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;

MPN- Most Probable Number; mL-Milliliter.

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Shivra
Prepared by

Checked by



Cola
Authorized Signatory

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka -575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001; 14001 & OHSAS 18001 Certified.

TEST REPORT: GROUND WATER MONITORING (GWM)

| | |
|-------------------------|---|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | GW3- Ground Water collected from L&T New Labor Colony |
| Date of Sampling | 16.08.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 05.09.2017 |
| Report No. | HECS/W/003/050917 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.75 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 max |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 1.34 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 6.5 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 16.5 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 59.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 19.2 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 6.8 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 153.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 9.4 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 1.37 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL = Below Detection Limit; D.L= Detection Limit; NTU=Nephelometric Turbidity Unit; mg/L= Milligrams per Liter;


MPN= Most Probable Number; mL=Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Shreya
Prepared by

Dinesh
Checked by



Enviro Care Systems
CHENNAI
600 083
Authorized Signatory

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.

Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.

Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001-Certified.

TEST REPORT: GROUND WATER MONITORING (GWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | GW4-Ground Water collected Near OMPL- ETP |
| Date of Sampling | 16.08.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 05.09.2017 |
| Report No | HECS/W/004/050917 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.46 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 max |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | BDL (DL 0.1) | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 63.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 15.1 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 53.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 21.0 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 5.10 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 158.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 7.79 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 2.05 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note: BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Shilpa
Prepared by

Dhananjay
Checked by



Chen
Authorized Signatory

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.

Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083,

Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

Laboratory Services Division

Accredited by NABL in the fields of Chemical

ISO 9001, 14001 & OHSAS 18001 Certified:

TEST REPORT: OPEN WELL WATER MONITORING (OWWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s.ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | OW1- Open Water collected from Tenka Ekkar |
| Date of Sampling | 16.08.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd. |
| Report Date | 05.09.2017 |
| Report No | HECS/W/005/050917 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|-------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.50 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 max |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 2.54 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 47.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 9.3 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 47 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 9.2 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 5.11 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 84.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 5.88 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 2.02 | 45 max |
| 15. | Iron as Fe | IS3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
MPN- Most Probable Number; mL-Milliliter

CONCLUSION: OPENWELL WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Shalpa
Prepared by

Checked by



Authorized Signatory

1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization . 2. Samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss / damage caused by use or misuse of test report after issuing or issue of test report. 5. The test results relate only to the test items.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011,

Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083,

Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

Laboratory Services Division

Accredited by NABL in the fields of Chemical

ISO 9001, 14001 & OHSAS 18001 Certified.

TEST REPORT: OPEN WELL WATER MONITORING (OWWM)

| | |
|-------------------------|---|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | OW2 - Open Water collected from Shantigudda Village |
| Date of Sampling | 16.08.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 05.09.2017 |
| Report No | HECS/W/006/050917 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.53 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | 2.67 | 15 max |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | BDL (DL:0.1) | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 34.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 8.92 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 66.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 13.4 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 4.3 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 81.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 6.5 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL: 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 2.24 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL:0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL:0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff.2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff.2009) | Per 100mL | Absent | Not Detectable |

Note: BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;


MPN- Most Probable Number; mL-Milliliter

CONCLUSION: OPENWELL WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Shyam
Prepared by

Checked by



Boyle
Authorized Signatory

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

TEST REPORT: OPEN WELL WATER MONITORING (OWWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description: | OW3 - Open Water collected from Premude Village |
| Date of Sampling | 16.08.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 05.09.2017 |
| Report No | HECS/W/007/050917 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.26 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 max |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 2.66 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 28.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 7.9 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 23.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 12.8 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 4.4 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 55.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 4.4 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 3.3 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff.2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff.2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
 MPN- Most Probable Number; mL-Milliliter.

CONCLUSION: OPENWELL WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

Shifa
Prepared by

End of Report

Checked by



CHENNAI
600 083
Authorized Signatory

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax : 42985500 E-mail: labsales@hecs.in

Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

TEST REPORT: SURFACE WATER MONITORING (SWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | SW1 - Surface Water collected Near OMPL - Flare Area |
| Date of Sampling | 16.08.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 05.09.2017 |
| Report No | HECS/W/008/050917 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|-------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | | 7.46 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Haizen unit | BDL (DL 1) | 15 max |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 2.2 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 191 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 54.0 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 123.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 17.5 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 8.9 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 406.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 74.3 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | 0.32 | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 2.21 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | 0.13 | 0.3 max |
| 16. | Hexavalent Chromium: Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per liter; NA-Not Available

CONCLUSION: SURFACE WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Shilpa
Prepared by

Checked by



[Signature]
Authorized Signatory

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.

Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: #18, 92nd Street, Ashok Nagar, Chennai - 600 083.

Ph: 42985555 Fax: 42985500 E-mail: labsales@hecs.in

Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

TEST REPORT: SURFACE WATER MONITORING (SWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | SW2 - Surface Water collected Near OMPL - Near Central Warehouse |
| Date of Sampling | 16.08.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 05.09.2017 |
| Report No | HECS/W/009/050917 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | | 7.11 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 max |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 3.8 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 79.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 16.0 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 33.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 72.0 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 7.8 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 181.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 67 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 4.04 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | 0.17 | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |


Note:- BDL - Below Detection Limit; D.L - Detection Limit; NTU - Nephelometric Turbidity Unit; mg/L - Milligrams per liter

CONCLUSION: SURFACE WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Shilpa
Prepared by

Checked by



1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss/damage caused by use or misuse of test report after issuing or issue of test report. 5. The test results relate only to the test items.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax: 42985500 E-mail: labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: NOISE MONITORING

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Noise Monitoring |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | OMPL – North, South, East and West sides |
| Sampling Date | 16.08.2017 |
| Report Date | 05.09.2017 |
| Report No. | HECS/N/001/050917 |

NOISE MONITORING: AUGUST 2017

| S.No. | Sampling Location | MoEF requirements in dB | | Avg. Noise level observed in dB | |
|-------|-------------------|-------------------------|-------|---------------------------------|-------|
| | | Day | Night | Day | Night |
| 1. | OMPL-North | | | 66.5 | 64.3 |
| 2. | OMPL-South | | | 64.5 | 61.7 |
| 3. | OMPL-East | 75 | 70 | 67.2 | 65.4 |
| 4. | OMPL-West | | | 65.6 | 63.0 |

Note: dB: Decibel

CONCLUSION: All the parameters meet MoEF Standards

*****End of Report*****

Renuka
Sampled by

Shilpa
Prepared by

Darren
Checked by

John
Authorized Signatory



Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT

TEST REPORT: STACK EMISSION MONITORING FOR THE MONTH OF AUGUST - 2017

Page No. 1 of 9

| | |
|-------------------------------|---|
| Name of the Industry | M/s Mangalore Petrochemicals Limited |
| Address of the Industry | Mangalore SEZ, Permude Village, Mangalore-574509, Karnataka, India. |
| Stack ID | NHT Charge heater. |
| Sample Description | Manual Stack Emission Monitoring |
| Sampling Date | 09.08.2017 |
| Sample Receipt | 11.08.2017 |
| Equipment Used | Vayubodhan VSS1 |
| Method of Sampling & Analysis | IS 11255:1995 Methods for Measurement of Emission from Stationary Sources |
| Sample Drawn by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 05.09.2017 |
| Report No. | HECS-OMPL/SEM/001/050917 |

| General Details | |
|--|---------|
| Ambient Temperature (°C) | 30 |
| Stack Diameter (m) | 1.94 |
| Stack Height (m) | 65 |
| Stack Temperature (°C) | 232 |
| Flue Gas Velocity (m/s) | 9.8 |
| Flue gas flow rate (Nm ³ /hr) | 57286.8 |

| Parameter monitored | Protocol | Results | Standard Norms |
|--------------------------------------|-----------------------|------------------------|----------------|
| SPM | IS 11255(Part 1)-1985 | 3 mg/NM ³ | 5 |
| Sulphur Dioxide(SO ₂) | IS 11255(Part 3)-1985 | BDL | 50 |
| Oxides of Nitrogen(NO _x) | IS 11255(Part 7)-2005 | 38 mg/NM ³ | 250 |
| Carbon monoxide(CO) | IS 5182(Part 10)-1999 | 0.6 mg/NM ³ | 100 |

Note: mg/NM³: milligram per normal cubic meter; SPM: Suspended Particulate Matter;
m/s - Meter per second; Nm³/hr – Normal cubic meter per hour

Inference: - STACK EMISSIONS AS ABOVE PARAMETERS ARE WITHIN STANDARDS

Sampled by

Prepared by

Verified by

Authorized Signatory

CHENNAI

600 083

10/09/2017

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax: 42986600 E-mail : labsales@hecs.in

**Laboratory Services Division**

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT**TEST REPORT: STACK EMISSION MONITORING FOR THE MONTH OF AUGUST - 2017**

Page No. 2 of 9

| | |
|-------------------------------|---|
| Name of the Industry | M/s Mangalore Petrochemicals Limited |
| Address of the Industry | Mangalore SEZ, Permude Village, Mangalore-574509, Karnataka, India. |
| Stack ID | Isomer Charge Heater |
| Sample Description | Manual Stack Emission Monitoring |
| Sampling Date | 09.08.2017 |
| Sample Receipt | 11.08.2017 |
| Equipment Used | Vayubodhan VSS1 |
| Method of Sampling & Analysis | IS 11255:1995 Methods for Measurement of Emission from Stationary Sources |
| Sample Drawn by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 05.09.2017 |
| Report No | HECS-OMPL/SEM/002/050917 |

| General Details | |
|--|---------|
| Ambient Temperature (°C) | 30 |
| Stack Diameter (m) | 2.3 |
| Stack Height (m) | 65 |
| Stack Temperature (°C) | 184 |
| Flue Gas Velocity (m/s) | 4.5 |
| Flue gas flow rate (Nm ³ /hr) | 42013.5 |

| Parameter monitored | Protocol | Results | Standard Norms |
|--------------------------------------|-----------------------|------------------------|----------------|
| SPM | IS 11255(Part 1)-1985 | 4 mg/NM ³ | 5 |
| Sulphur Dioxide(SO ₂) | IS 11255(Part 3)-1985 | BDL | 50 |
| Oxides of Nitrogen(NO _x) | IS 11255(Part 7)-2005 | 60 mg/NM ³ | 250 |
| Carbon monoxide (CO) | IS 5182(Part 10)-1999 | 0.4 mg/NM ³ | 100 |


Note: mg/NM³ - milligram per normal cubic meter; SPM: Suspended Particulate Matter;
 m/s - Meter per second; NM³/hr - Normal cubic meter per hour

Inference: - STACK EMISSIONS AS ABOVE PARAMETERS ARE WITHIN STANDARDS

Sampled by

Prepared by

Verified by

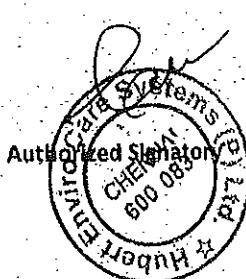

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

Laboratory Services Division

Accredited by NABL in the fields of Chemical
 ISO 9001, 14001 & OHSAS 18001 Certified.



Certificate No. T-3180

TEST REPORT

TEST REPORT: STACK EMISSION MONITORING FOR THE MONTH OF AUGUST - 2017

Page No. 3 of 9

| | |
|-------------------------------|---|
| Name of the Industry | M/s Mangalore Petrochemicals Limited. |
| Address of the Industry | Mangalore SEZ, Permude Village, Mangalore-574509, Karnataka, India. |
| Stack ID | CPP (GTG-HRSG) - 1 |
| Sample Description | Manual Stack Emission Monitoring |
| Sampling Date | 10.08.2017 |
| Sample Receipt | 12.08.2017 |
| Equipment Used | Vayubodhan VSS1 |
| Method of Sampling & Analysis | IS 11255:1995 Methods for Measurement of Emission from Stationary Sources |
| Sample Drawn by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 05.09.2017 |
| Report No. | HECS-OMPL/SEM/003/050917 |

| General Details | |
|--|----------|
| Ambient Temperature (°C) | 31 |
| Stack Diameter (m) | 2.8 |
| Stack Height (m) | 70 |
| Stack Temperature (°C) | 120 |
| Flue Gas Velocity (m/s) | 12.6 |
| Flue gas flow rate (Nm ³ /hr) | 201893.7 |

| Parameter monitored | Protocol | Results | Standard Norms |
|--------------------------------------|-----------------------|------------------------|----------------|
| SPM | IS 11255(Part 1)-1985 | 31 mg/NM ³ | 50 |
| Sulphur Dioxide(SO ₂) | IS 11255(Part 3)-1985 | 41 mg/NM ³ | 850 |
| Oxides of Nitrogen(NO _x) | IS 11255(Part 7)-2005 | 58 mg/NM ³ | 350 |
| Carbon monoxide (CO) | IS 5182(Part 10)-1999 | 0.6 mg/NM ³ | 150 |


Note: mg/NM³ – milligram per normal cubic meter; SPM: Suspended Particulate Matter;
 m/s – Meter per second; Nm³/hr – Normal cubic meter per hour

Inference: - STACK EMISSIONS AS ABOVE PARAMETERS ARE WITHIN STANDARDS

Sampled by

Shifa
Prepared by

Debjay
Verified by

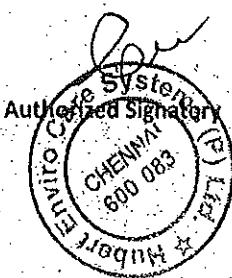

1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2: Samples are not drawn by HECS unless so otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss / damage caused by use or misuse of test report after invoicing or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.



Certificate No. T-3180

TEST REPORT

TEST REPORT: STACK EMISSION MONITORING FOR THE MONTH OF AUGUST - 2017

Page No. 4 of 9

| | |
|-------------------------------|---|
| Name of the Industry | M/s Mangalore Petrochemicals Limited |
| Address of the Industry | Mangalore SEZ, Permude Village, Mangalore-574509, Karnataka, India. |
| Stack ID | Plat former Unit Charge Heater |
| Sample Description | Manual Stack Emission Monitoring |
| Sampling Date | 09.08.2017 |
| Sample Receipt | 11.08.2017 |
| Equipment Used | Vayubodhan VSS1 |
| Method of Sampling & Analysis | IS 11255:1995 Methods for Measurement of Emission from Stationary Sources |
| Sample Drawn by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 05.09.2017 |
| Report No | HECS-OMPL/SEM/004/050917 |

| General Details | |
|---|----------|
| Ambient Temperature (°C) | 30 |
| Stack Diameter (m) | 4.1 |
| Stack Height (m) | 94 |
| Stack Temperature (°C) | 108 |
| Flue Gas Velocity (m/s) | 5.3 |
| Flue gas flow rate (Nm ³ /hr.) | 182795.7 |

| Parameter monitored | Protocol | Results | Standard Norms |
|--------------------------------------|-----------------------|------------------------|----------------|
| SPM | IS 11255(Part 1)-1985 | 3 mg/NM ³ | 5 |
| Sulphur Dioxide(SO ₂) | IS 11255(Part 3)-1985 | BDL | 50 |
| Oxides of Nitrogen(NO _x) | IS 11255(Part 7)-2005 | 15 mg/NM ³ | 250 |
| Carbon monoxide (CO) | IS 5182(Part 10)-1999 | 0.3 mg/NM ³ | 100 |

Note: mg/NM³: milligram per normal cubic meter; SPM: Suspended Particulate Matter;
 m/s ~ Meter per second; NM³/hr ~ Normal cubic meter per hour

Inference: - STACK EMISSIONS AS ABOVE PARAMETERS ARE WITHIN STANDARDS

Devil
Sampled by

Sukta
Prepared by

Richa
Verified by



Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111; Email: kro@hecs.in, Website: www.hecs.in
 H.O.: #18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax: 42985500 E-mail: labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
 ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No: T-3180

TEST REPORT

TEST REPORT: STACK EMISSION MONITORING FOR THE MONTH OF AUGUST - 2017

Page No. 5 of 9

| | |
|-------------------------------|---|
| Name of the Industry | M/s Mangalore Petrochemicals Limited |
| Address of the Industry | Mangalore SEZ, Pärnude Village, Mangalore-574509, Karnataka, India. |
| Stack ID | CPP Utility Boiler |
| Sample Description | Manual Stack Emission Monitoring |
| Sampling Date | 10.08.2017 |
| Sample Receipt | 12.08.2017 |
| Equipment Used | Vayubodhan VSS1 |
| Method of Sampling & Analysis | IS 11255:1995 Methods for Measurement of Emission from Stationary Sources |
| Sample Drawn by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 05.09.2017 |
| Report No | HECS-OMPL/SEM/005/050917 |

| General Details | |
|--|----------|
| Ambient Temperature (°C) | 31 |
| Stack Diameter (m) | 2.74 |
| Stack Height (m) | 70 |
| Stack Temperature (°C) | 173 |
| Flue Gas Velocity (m/s) | 16.0 |
| Flue gas flow rate (Nm ³ /hr) | 215694.5 |

| Parameter monitored | Protocol | Results | Standard Norms |
|--------------------------------------|-----------------------|-----------------------|----------------|
| SPM | IS 11255(Part 1)-1985 | 27 mg/NM ³ | 50 |
| Sulphur Dioxide(SO ₂) | IS 11255(Part 3)-1985 | 15 mg/NM ³ | 850 |
| Oxides of Nitrogen(NO _x) | IS 11255(Part 7)-2005 | 17 mg/NM ³ | 350 |
| Carbon monoxide (CO) | IS 5182(Part 10)-1999 | 1 mg/NM ³ | 150 |


Note: mg/NM³: milligram per normal cubic meter; SPM: Suspended Particulate Matter;
 m/s - Meter per second; NM³/hr - Normal cubic meter per hour

Inference: - STACK EMISSIONS AS ABOVE PARAMETERS ARE WITHIN STANDARDS

Sampled by

Prepared by

Verified by

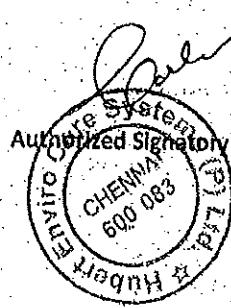



Certificate No. T-3180

TEST REPORT

TEST REPORT: STACK EMISSION MONITORING FOR THE MONTH OF AUGUST - 2017

Page No. 6 of 9

| | |
|-------------------------------|---|
| Name of the Industry | M/s Mangalore Petrochemicals Limited |
| Address of the Industry | Mangalore SEZ, Pérnude Village, Mangalore-574509, Karnataka, India. |
| Stack ID | Tatotary Charge Heater |
| Sample Description | Manual Stack Emission Monitoring |
| Sampling Date | 07.08.2017 |
| Sample Receipt | 09.08.2017 |
| Equipment Used | Vayubodhan VSS1 |
| Method of Sampling & Analysis | IS 11255:1995 Methods for Measurement of Emission from Stationary Sources |
| Sample Drawn by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 05.09.2017 |
| Report No | HECS-OMPL/SEM/006/050917 |

| General Details | |
|--|---------|
| Ambient Temperature (°C) | 30 |
| Stack Diameter (m) | 1.75 |
| Stack Height (m) | 65 |
| Stack Temperature (°C) | 135 |
| Flue Gas Velocity (m/s) | 5.4 |
| Flue gas flow rate (Nm ³ /hr) | 32003.5 |

| Parameter monitored | Protocol | Results | Standard Norms |
|--------------------------------------|-----------------------|------------------------|----------------|
| SPM | IS 11255(Part 1)-1985 | 4 mg/NM ³ | 5 |
| Sulphur Dioxide(SO ₂) | IS 11255(Part 3)-1985 | 9 mg/NM ³ | 50 |
| Oxides of Nitrogen(NO _x) | IS 11255(Part 7)-2005 | 41 mg/NM ³ | 250 |
| Carbon monoxide (CO) | IS 5182(Part 10)-1999 | 0.5 mg/NM ³ | 100 |


Note: mg/NM³ – milligram per normal cubic meter; SPM: Suspended Particulate Matter;
 m/s – Meter per second; Nm³/hr – Normal cubic meter per hour.

Inference: - STACK EMISSIONS AS ABOVE PARAMETERS ARE WITHIN STANDARDS

Sampled by

Shyra
Prepared by

Verified by

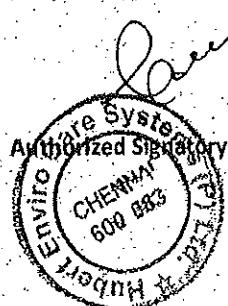

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.

Ph: 0824 - 2408111; Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.

Ph: 42985555 Fax: 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT

TEST REPORT: STACK EMISSION MONITORING FOR THE MONTH OF AUGUST - 2017

Page No. 7 of 9

| | |
|-------------------------------|---|
| Name of the Industry | M/s Mangalore Petrochemicals Limited. |
| Address of the Industry | Mangalore SEZ, Perimude Village, Mangalore-574509, Karnataka, India. |
| Stack ID | Xylene Column Reboiler Heater(Part A) |
| Sample Description | Manual Stack Emission Monitoring |
| Sampling Date | 08.08.2017 |
| Sample Receipt | 10.08.2017 |
| Equipment Used | Vayubodhan VSS1 |
| Method of Sampling & Analysis | IS-11255:1995 Methods for Measurement of Emission from Stationary Sources |
| Sample Drawn by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 05.09.2017 |
| Report No | HECS-OMPL/SEM/007/050917 |

| General Details | |
|--|----------|
| Ambient Temperature (°C) | 31 |
| Stack Diameter (m) | 3.69 |
| Stack Height (m) | 98 |
| Stack Temperature (°C) | 122 |
| Flue Gas Velocity (m/s) | 5.8 |
| Flue gas flow rate (Nm ³ /hr) | 159898.6 |

| Parameter monitored | Protocol | Results | Standard Norms |
|--------------------------------------|-----------------------|------------------------|----------------|
| SPM | IS 11255(Part 1)-1985 | 5 mg/NM ³ | 50 |
| Sulphur Dioxide(SO ₂) | IS 11255(Part 3)-1985 | 10 mg/NM ³ | 850 |
| Oxides of Nitrogen(NO _x) | IS 11255(Part 7)-2005 | 56 mg/NM ³ | 350 |
| Carbon monoxide(CO) | IS 5182(Part 10)-1999 | 1.1 mg/NM ³ | 150 |


Note: mg/NM³ – milligram per normal cubic meter; SPM: Suspended Particulate Matter;
m/s – Meter per second; Nm³/hr – Normal cubic meter per hour

Inference: - STACK EMISSIONS AS ABOVE PARAMETERS ARE WITHIN STANDARDS

Revi
Sampled by

S. Siva
Prepared by

R. Jayachandran
Verified by

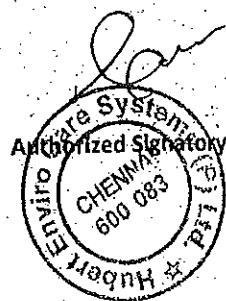

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: #18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985565 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
 ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT

TEST REPORT: STACK EMISSION MONITORING FOR THE MONTH OF AUGUST - 2017

Page No. 8 of 9

| | |
|-------------------------------|---|
| Name of the Industry | M/s Mangalore Petrochemicals Limited |
| Address of the Industry | Mangalore SEZ, Perimude Village, Mangalore-574509, Karnataka, India. |
| Stack ID | Xylene Column Reboiler Heater(Part-B) |
| Sample Description | Manual Stack Emission Monitoring |
| Sampling Date | 08.08.2017 |
| Sample Receipt | 10.08.2017 |
| Equipment Used | Vayubodhan VSS1 |
| Method of Sampling & Analysis | IS 11255:1995 Methods for Measurement of Emission from Stationary Sources |
| Sample Drawn by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 05.09.2017 |
| Report No. | HECS-OMPL/SEM/008/050917 |

| General Details | |
|--|--------|
| Ambient Temperature (°C) | 31 |
| Stack Diameter (m) | 3.69 |
| Stack Height (m) | 98 |
| Stack Temperature (°C) | 121 |
| Flue Gas Velocity (m/s) | 5.7 |
| Flue gas flow rate (Nm ³ /hr) | 156374 |

| Parameter monitored | Protocol | Results | Standard Norms |
|--------------------------------------|-----------------------|------------------------|----------------|
| SPM | IS 11255(Part 1)-1985 | 4 mg/NM ³ | 50 |
| Sulphur Dioxide(SO ₂) | IS 11255(Part 3)-1985 | 9 mg/NM ³ | 850 |
| Oxides of Nitrogen(NO _x) | IS 11255(Part 7)-2005 | 27 mg/NM ³ | 350 |
| Carbon monoxide (CO) | IS 5182(Part 10)-1999 | 0.9 mg/NM ³ | 150 |


Note: mg/NM³ - milligram per normal cubic meter; SPM: Suspended Particulate Matter;
 m/s - Meter per second; NM³/hr - Normal cubic meter per hour

Inference: - STACK EMISSIONS AS ABOVE PARAMETERS ARE WITHIN STANDARDS

Per LC
Sampled by

Shrikha
Prepared by

Dhananjay
Verified by

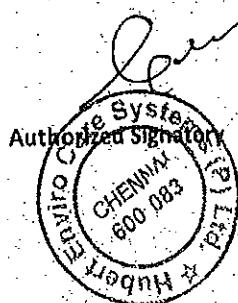

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O., # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified:

TEST REPORT NO. T-3180

TEST REPORT: STACK EMISSION MONITORING FOR THE MONTH OF AUGUST - 2017

Page No. 9 of 9

| | |
|-------------------------------|---|
| Name of the Industry | M/s Mangalore Petrochemicals Limited |
| Address of the Industry | Mangalore SEZ, Perimude Village, Mangalore-574509, Karnataka, India. |
| Stack ID | BTF (Toluene Column Reboiler Heater) |
| Sample Description | Manual Stack Emission Monitoring |
| Sampling Date | 07.08.2017 |
| Sample Receipt | 09.08.2017 |
| Equipment Used | Vayubodhan VSS1 |
| Method of Sampling & Analysis | IS 11255:1995 Methods for Measurement of Emission from Stationary Sources |
| Sample Drawn by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 05.09.2017 |
| Report No | HECS-OMPL/SEM/009/050917 |

| General Details | |
|--|---------|
| Ambient Temperature (°C) | 30 |
| Stack Diameter (m) | 3.29 |
| Stack Height (m) | 80 |
| Stack Temperature (°C) | 187 |
| Flue Gas Velocity (m/s) | 5.3 |
| Flue gas flow rate (Nm ³ /hr) | 97586.4 |

| Parameter monitored | Protocol | Results | Standard Norms |
|--------------------------------------|-----------------------|------------------------|----------------|
| SPM | IS 11255(Part 1)-1985 | 5 mg/NM ³ | 50 |
| Sulphur Dioxide(SO ₂) | IS 11255(Part 3)-1985 | 45 mg/NM ³ | 850 |
| Oxides of Nitrogen(NO _x) | IS 11255(Part 7)-2005 | 53 mg/NM ³ | 350 |
| Carbon monoxide (CO) | IS 5182(Part 10)-1999 | 0.9 mg/NM ³ | 150 |


Note: mg/NM³ : milligram per normal cubic meter; SPM: Suspended Particulate Matter;
m/s – Meter per second; Nm³/hr – Normal cubic meter per hour

Inference: - STACK EMISSIONS AS ABOVE PARAMETERS ARE WITHIN STANDARDS

Benil
Sampled by

Sulfa
Prepared by

Dhanay
Verified by

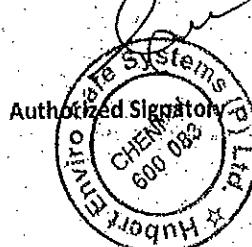

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.

Ph: 0824-2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.

Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

ANNEXURE - S

Laboratory Services Division

Accredited by NABL in the fields of Chemical

ISO 9001, 14001 & OHSAS 18001 Certified.

TEST REPORT: ETP EFFULENT MONITORING (ETP EM)


| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Guard Pond Pump Discharge (ETP Effluent) |
| Date of Sampling | 05.08.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 05.09.2017 |
| Report No | HECS/W/011/050917 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | Permissible Limit |
|-------|--|------------------------------------|-------------|--------------|--|
| 1. | Color | IS:3025:(Pt 4)1983 (Reaff 2006) | Hazen Units | 2.0 | All efforts should be made to remove colour and unpleasant odour as far as practicable |
| 2. | Odour | IS 3025 (Part5)-1983, Reaff 2006 | | Agreeable | |
| 3. | Total suspended Solids | 2540D APHA 22nd Edn.. 2012 | mg/L | 9.2 | 100 |
| 4. | pH | IS:3025:(Pt 11):1983 (Reaff 2006) | | 6.84 | 6.0-8.5 |
| 5. | Temperature | IS 3025 (Pt 9):1983 (Reaff:2006) | °C | 30.0 | Shall not exceed 5 degree Centigrade above the receiving water temperature |
| 6. | Oil & Grease | IS 3025,4(Pt 39):2000 (Reaff 2009) | mg/L | BDL(DL 1) | 5 |
| 7. | Total Residual Chlorine as Cl ₂ | IS:3025 (Pt26)1986 (Reaff 2009) | mg/L | BDL(DL 0.1) | 1 |
| 8. | Ammonical Nitrogen as N | IS 3025 Part (34)1988 | mg/L | 9.1 | 50 |
| 9. | Total Kjeldhal Nitrogen as N | IS 3025 Part (34)1988 | mg/L | 23.0 | 100 |
| 10. | Free Ammonia as NH ₃ | IS:3025 (Part34)1998 Reaff. 2003 | mg/L | BDL(DL 0.02) | 5 |
| 11. | BOD, 3 days @ 27°C as O ₂ | IS:3025 (Pt 44)1993 (Reaff 2009) | mg/L | 11.0 | 30 |
| 12. | COD as O ₂ | IS 3025 Part (58)2006 | mg/L | 51.0 | 125 |
| 13. | Lead as Pb | IS:3025 (Pt 47)1994 (Reaff 2009) | mg/L | BDL(DL 0.1) | 0.1 |
| 14. | Chromium (Hexavalent) as Cr ⁶⁺ | IS 3025 Part (52):2003 | mg/L | BDL(DL 0.01) | 0.1 |
| 15. | Total Chromium as Cr | IS 3025(Pt52):2003 (Reaff 2009) | mg/L | BDL(DL 0.01) | 2.0 |
| 16. | Copper as Cu | IS:3025:5,(Pt 42)1992 (Reaff 2009) | mg/L | BDL(DL 0.05) | 1.0 |
| 17. | Zinc as Zn | IS:3025 (Part49)1994 (Reaff 2009) | mg/L | BDL(DL 0.1) | 5.0 |

Prepared by
Sujatha

Checked by
Dhananjay



Authorized Signatory

TEST REPORT: ETP EFFULENT MONITORING (ETP EM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMP), |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Guard Pond Pump Discharge (ETP Effluent) |
| Date of Sampling | 05.08.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 05.09.2017 |
| Report No | HECS/W/011/050917 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | Permissible Limit |
|-------|-----------------------------------|------------------------------------|-------|---------------------------|--|
| 18. | Nickel as Ni | IS:3025 (Part54)2003 (Reaff 2009) | mg/L | BDL(DL 0.05) | 1.0 |
| 19. | Fluoride as F- | IS 3025 part (60):2008 | mg/L | BDL(DL 0.2) | 1.0 |
| 20. | Sulphide as S ²⁻ | IS:3025 (Pt 29)1986 (Reaff 2009) | mg/L | BDL(DL 0.04) | 2.0 |
| 21. | Particle Size of Suspended solids | APHA 22nd Edition | | Passed through 850 micron | 850 micron |
| 22. | Arsenic as As | IS:3025 (Part37)1988(Reaff 2009) | mg/L | BDL(DL 0.005) | 0.2 |
| 23. | Mercury as Hg | IS:3025 (Part48)1994 RA 1999 | mg/L | BDL(DL 0.001) | 0.01 |
| 24. | Cadmium as Cd | IS:3025 (Part41)1991 | mg/L | BDL(DL 0.01) | 0.1 |
| 25. | Selenium as Se | IS:3025 (Part56)2003 | mg/L | BDL(DL 0.005) | 0.05 |
| 26. | Cyanide as CN | IS:3025 (Part27)1986 Reaff. 2009 | mg/L | BDL(DL 0.01) | 0.2 |
| 27. | Phenolic Compounds as C6H5OH | IS 3025 Part (43)1992;RA 2009 | mg/L | BDL(DL 0.001) | 0.35 |
| 28. | Total Iron as Fe | IS 3025(Pt-53):2003(Reaff 2009) | mg/L | 0.27 | 3 |
| 29. | Manganese | IS:3025:(Pt-59):2006 | mg/L | BDL(DL 0.01) | 2 |
| 30. | Total Phosphorous as P | IS 3025(Pt 31):1988(Reaff 2009) | mg/L | BDL(DL 0.01) | 3 |
| 31. | Nitrate | IS:3025 (Pt 34):1988. (Reaff 2009) | mg/L | BDL(DL 1) | 20 |
| 32. | Vanadium as V | IS:3025 (Part55)2003 | mg/L | BDL(DL 0.01) | 0.1 |
| 33. | Benzo(a)pyrene | USEPA 8270C | mg/L | BDL(DL 0.0001) | 0.2 |
| 34. | Benzene | USEPA 8270C | mg/L | BDL(DL 0.0001) | 0.1 |
| 35. | Bioassay Test | IS 6582(Part 2):2001 | Tf | 9:1 | 90% survival of fish after 96 hrs in 100% effluent |

Note:-BDL - Below Detection Limit; D.L- Detection Limit; mg/L- Milligrams per liter

CONCLUSION: ETP OUTLET EFFULENT WATER AS ABOVE PARAMETERS ARE WITHIN STANDARDS

End of Report

Checked by

Prepared by



Authorized Signatory

[Signature]

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.

Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.

Ph: 42985555 Fax: 42985500 E-mail : labsales@hecs.in

Laboratory Services Division

Accredited by NABL in the fields of Chemical

ISO 9001, 14001 & OHSAS 18001 Certified.

TEST REPORT: ETP EFFLUENT MONITORING (ETP EM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Guard Pond Pump Discharge (ETP Effluent) |
| Date of Sampling | 16.08.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P).Ltd |
| Report Date | 05.09.2017 |
| Report No | HECS/W/015/050917 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | Permissible Limit |
|-------|--|------------------------------------|-------------|--------------|--|
| 1. | Color | IS:3025:(Pt 4)1983 (Reaff 2006) | Hazen Units | 3.2 | All efforts should be made to remove colour and unpleasant odour as far as practicable |
| 2. | Odour | IS 3025 (Part5)-1983, Reaff 2006 | | Agreeable | |
| 3. | Total suspended Solids | 2540D APHA 22nd Edn., 2012 | mg/L | 9.4 | 100 |
| 4. | pH | IS:3025:(Pt 11):1983 (Reaff 2006) | | 7.59 | 6.0-8.5 |
| 5. | Temperature | IS 3025 (Pt 9):1983 (Reaff:2006) | °C | 30.0 | Shall not exceed 5 degree Centigrade above the receiving water temperature |
| 6. | Oil & Grease | IS 3025.4(Pt 39):2000 (Reaff 2009) | mg/L | BDL(DL 1) | 5 |
| 7. | Total Residual Chlorine as Cl ₂ | IS:3025 (Pt26)1986 (Reaff 2009) | mg/L | BDL (DL 0.1) | 1 |
| 8. | Ammonical Nitrogen as N | IS 3025 Part (34)1988 | mg/L | 9.3 | 50 |
| 9. | Total Kjeldhal Nitrogen as N | IS 3025 Part (34)1988 | mg/L | 19.1 | 100 |
| 10. | Free Ammonia as NH ₃ | IS:3025 (Part34)1998 Reaff. 2003 | mg/L | BDL(DL 0.02) | 5 |
| 11. | BOD, 3 days @ 27°C as O ₂ | IS:3025 (Pt 44)1993 (Reaff 2009) | mg/L | 11.0 | 30 |
| 12. | COD as O ₂ | IS 3025 Part (58)2006 | mg/L | 56 | 125 |
| 13. | Lead as Pb | IS:3025 (Pt 47)1994 (Reaff 2009) | mg/L | BDL(DL 0.1) | 0.1 |
| 14. | Chromium (Hexavalent) as Cr ⁶⁺ | IS 3025 Part (52):2003 | mg/L | BDL(DL 0.01) | 0.1 |
| 15. | Total Chromium as Cr | IS 3025(Pt52):2003 (Reaff 2009) | mg/L | BDL(DL 0.01) | 2.0 |
| 16. | Copper as Cu | IS:3025.5,(Pt 42)1992 (Reaff.2009) | mg/L | BDL(DL 0.05) | 1.0 |
| 17. | Zinc as Zn | IS:3025 (Part49)1994 (Reaff 2009) | mg/L | BDL(DL 0.1) | 5.0 |

Shilpa
Prepared by

Checked by
Rajesh



Rajesh
Authorized Signatory

1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or losses / damage caused by use or misuse of test report after invoicing or issue of test report. 5. The test results relate only to the test items.

Hubert Enviro Care Systems (P) Ltd.
 C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

Laboratory Services Division
 Accredited by NABL in the fields of Chemical
 ISO 9001, 14001 & OHSAS 18001 Certified.

TEST REPORT: ETP EFFLUENT MONITORING (ETP EMI)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Guard Pond Pump Discharge (ETP Effluent) |
| Date of Sampling | 16.08.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 05.09.2017 |
| Report No | HECS/W/015/050917 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | Permissible Limit |
|-------|-----------------------------------|-----------------------------------|-------|---------------------------|--|
| 18. | Nickel as Ni | IS:3025 (Part54)2003 (Reaff 2009) | mg/L | BDL(DL 0.05) | 1.0 |
| 19. | Fluoride as F- | IS 3025 part (60):2008 | mg/L | BDL(DL 0.2) | 1.0 |
| 20. | Sulphide as S ²⁻ | IS:3025 (Pt 29)1986 (Reaff 2009) | mg/L | BDL(DL 0.04) | 2.0 |
| 21. | Particle Size of Suspended solids | APHA 22nd Edition | | Passed through 850 micron | 850 micron |
| 22. | Arsenic as As | IS:3025 (Part37)1988(Reaff 2009) | mg/L | BDL(DL 0.005) | 0.2 |
| 23. | Mercury as Hg | IS:3025 (Part48)1994 RA 1999 | mg/L | BDL(DL 0.001) | 0.01 |
| 24. | Cadmium as Cd | IS:3025 (Part41)1991 | mg/L | BDL(DL 0.01) | 0.1 |
| 25. | Selenium as Se | IS:3025 (Part56)2003 | mg/L | BDL(DL 0.005) | 0.05 |
| 26. | Cyanide as CN | IS:3025 (Part27)1986 Reaff. 2009 | mg/L | BDL(DL 0.01) | 0.2 |
| 27. | Phenolic Compounds as C6H5OH | IS 3025 Part (43)1992,RA 2009 | mg/L | BDL(DL 0.001) | 0.35 |
| 28. | Total Iron as Fe | IS 3025(Pt 53):2003(Reaff 2009) | mg/L | 0.20 | 3 |
| 29. | Manganese | IS:3025 (Pt-59):2006 | mg/L | BDL(DL 0.01) | 2 |
| 30. | Total Phosphorous as P | IS 3025(Pt.31):1988(Reaff 2009) | mg/L | BDL(DL 0.01) | 3 |
| 31. | Nitrate | IS 3025 (Pt 34):1988 (Reaff 2009) | mg/L | BDL(DL 1) | 20 |
| 32. | Vanadium as V | IS:3025 (Part56)2003 | mg/L | BDL(DL 0.01) | 0.1 |
| 33. | Benzo(a)pyrene | USEPA 8270C | mg/L | BDL(DL 0.0001) | 0.2 |
| 34. | Benzene | USEPA 8270C | mg/L | BDL(DL 0.0001) | 0.1 |
| 35. | Bioassay Test | IS 6582(Part 2):2001 | Tf | 9:1 | 90% survival of fish after 96 hrs in 100% effluent |

Note:-BDL - Below Detection Limit; D.L- Detection Limit; mg/L - Milligrams per liter

CONCLUSION: ETP OUTLET EFFLUENT WATER AS ABOVE PARAMETERS ARE WITHIN STANDARDS

End of Report

Shilpa
Prepared by

R. Venkateswaran
Checked by



[Signature]
Authorized Signatory

Form-1 (Rule 4)
Returns Regarding Water Consumed during the Month of August, 2017

| Name and address of the Consumer | Purpose for which water consumed | Reading at the beginning of the first day of the calendar month under report | Reading at the end of the last day of the calendar month under report | Quantity of water Consumed in Kilo Liters | If the meter was out of order, the monthly average consumption of water for the previous 3 months of the working period | Quantity of water qualifying for rebate according to the rates | Remarks |
|--|--|--|---|---|---|--|---------|
| | Industrial cooling, spraying in mine pits or boiler feed | | | | | | |
| | Cooling Water | 0 | 63113 | 63113 | | | |
| | Boiler Feed Water | 0 | 92277 | 92277 | | | |
| M/s ONGC Mangalore Petrochemicals Limited, Mangalore Special Economic Zone, Permuide, Mangalore -574 509 | Fire Water Domestic purpose | 0 | 23075 | 23075 | | | |
| | Drinking Water & Sanitation Processing whereby water gets polluted and the pollutants are easily biodegradable | 0 | 2659 | 2659 | | | |
| | Service Water | | 3782 | 3782 | | | |
| | Total Consumption | | 184856 | 184856 | | | |

Signature of the Consumer

Shivaprakash, Manager(Env)

M/s ONGC Mangalore Petrochemicals Limited, Mangalore Special Economic Zone, Permuide, Mangalore -574 509

Name _____
Address _____

ANNEXURE - F


ANNEXURE - G

O NGC Mangalore Petrochemicals Limited

Production Details for August, 2017

Net Naptha Processed – 95,214 MT

| Sl. No. | Name of the Product | Quantity, MT |
|---------|----------------------|--------------|
| 1 | Paraxylene (Product) | 49,957 |
| 2 | Benzene (Co product) | 11,754 |

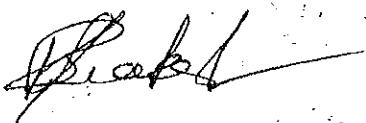

ओएनजीसी मंगलूर पेट्रोकेमिकल्स लिमिटेड

(मंगलूर रिफाइनरी एंड पेट्रोकेमिकल्स लिमिटेड की सहायक कंपनी)

ONGC Mangalore Petrochemicals Limited

(A Subsidiary of Mangalore Refinery and Petrochemicals Ltd.)

एमएसईले, पेर्मुदे, मंगलूरु MSEZ, Permude, Mangaluru - 574 509 CIN: U40107KA2006PLC041258
दूरभाष Landline:- 0824-2872000, फैक्स Fax:- 0824-2872005, Website: www.ompl.co.in

REF: OMPL/PCB/SP/2017-18/

Date: 13/10/2017

To:
The Environmental Officer
Regional Office
KSPCB
Balkampady, Mangalore-11

Dear Sir,

Sub: Submission of Environmental Monitoring Report for the Month of September, 2017, Production Report for September 2017 & Returns Regarding Water Consumed for the Month of September, 2017

Ref: KSPCB Combined Consent Order No. AW-301949 dated 27th January, 2017

With respect to the above subject; we are herewith submitting the following Environmental Monitoring Reports, Production Reports & Returns Regarding Water Consumed in the Month of September 2017 respectively, enclosed herewith.

1. Ambient Air Quality Monitoring at 5 different locations in and around OMPL, enclosed as Annexure-A
2. Water Analysis Reports at 9 different locations in and around OMPL, as Annexure-B
3. Noise Level Monitoring Report at OMPL, as Annexure-C
4. Treated Effluent Analysis Report -D
5. Returns Regarding Water Consumed, for the Month of September 2017, as Annexure-E
6. Production Report as Annexure-F

Thanking You,

Savaprakash
Manager (Env)

CC: Member Secretary, KSPCB, Bangalore

CC: Head (Technical), MSEZ

CC: CEO, OMPL for info

CC: COO, OMPL for info

Jinglun
Chase 0245 in my diary
Date 23/10/17

Hubert Enviro Care Systems (P) Ltd.
 C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Annexure A
Laboratory Services Division

Accredited by NABL in the fields of Chemical
 ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | OMPL - East Side |
| Report Date | 09.10.2017 |
| Report No | HECS/AA/001/091017 |

CONSOLIDATED TEST RESULTS: SEPTEMBER 2017

| SEPTEMBER '17 - Week | | 36-Week | | 37-Week | | 38-Week | | 39-Week | | Average Value |
|--|-------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|
| Parameters | NAAQS | 04.09.17 | 07.09.17 | 11.09.17 | 14.09.17 | 18.09.17 | 21.09.17 | 25.09.17 | 28.09.17 | |
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60 | 17.0 | 17.7 | 17.5 | 15.6 | 16.4 | 17.1 | 18.0 | 16.9 | 17.03 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 47.2 | 46.3 | 45.5 | 46.0 | 45.4 | 44.9 | 46.5 | 46.3 | 46.01 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 2.7 | 2.8 | 2.9 | 2.9 | 2.8 | 2.9 | 3.0 | 2.7 | 2.84 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 2.9 | 3.0 | 3.0 | 2.9 | 3.0 | 2.9 | 3.1 | 2.9 | 2.96 |
| CO (mg/m^3) | 2.0 | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100 | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400 | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1.0 | BDL |
| As (ng/m^3) | 6.0 | BDL |
| NI (ng/m^3) | 20 | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 05 | BDL |
| B(α)P (ng/m^3) | 01 | BDL |

Note: BDL =Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂- Sulphur dioxide; NO₂ - Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³);O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$);NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$); As-Arsenic (DL 0.1 ng/m³); NI-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(α)P- Benzo- α -pyrene (DL0.1 ng/m³); ng/m³: nanogram per cubic meter; $\mu\text{g}/\text{m}^3$ - microgram per cubic meter

CONCLUSION: All the parameters meet the NAAQ Standards

*****End of Report *****

[Signature]
 Sampled by

[Signature]
 Prepared by

[Signature]
 Checked by



[Signature]
 Authorized Signatory

1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss / damage caused by use or misuse of test report after involving or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax: 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | Shantigudda |
| Report Date | 09.10.2017 |
| Report No | HECS/AA/002/091017 |

CONSOLIDATED TEST RESULTS: SEPTEMBER 2017

| SEPTEMBER '17 - Week | | 36-Week | | 37-Week | | 38-Week | | 39-Week | | Average Value |
|--|-------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|
| Parameters | NAAQS | 04.09.17 | 07.09.17 | 11.09.17 | 14.09.17 | 18.09.17 | 21.09.17 | 25.09.17 | 28.09.17 | |
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60 | 17.5 | 18.1 | 17.8 | 17.3 | 17.6 | 16.2 | 16.5 | 18.4 | 17.43 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 46.8 | 46.5 | 47.2 | 47.7 | 48.5 | 46.1 | 47.0 | 49.0 | 47.35 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.0 | 2.9 | 2.9 | 2.9 | 3.0 | 2.8 | 2.8 | 3.1 | 2.93 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 2.9 | 3.1 | 3.0 | 2.9 | 3.0 | 2.8 | 2.9 | 3.2 | 2.98 |
| CO (mg/m^3) | 2.0 | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100 | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400 | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1.0 | BDL |
| As (ng/m^3) | 6.0 | BDL |
| Ni (ng/m^3) | 20 | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 0.5 | BDL |
| B(a)P (ng/m^3) | 0.1 | BDL |

Note: BDL =Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂ Sulphur dioxide; NO₂ - Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³);O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$);NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$);Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$);As-Arsenic (DL 0.1 ng/m³);Ni-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(a)P- Benzo -a-pyrene (DL 0.1 ng/m³); ng/m³: nanogram per cubic meter; $\mu\text{g}/\text{m}^3$ - microgram per cubic meter


CONCLUSION: All the parameters meet the NAAQ Standards

*****End of Report*****

Sampled by

Prepared by

Checked by



Authorized Signatory

1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. All samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 16 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss/damage caused by use or misuse of test report after invoicing or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax: 42985500 E-mail: labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | Tenka Ekkar |
| Report Date | 09.10.2017 |
| Report No | HECS/AA/003/091017 |

CONSOLIDATED TEST RESULTS: SEPTEMBER 2017

| SEPTEMBER '17 - Week | | 36-Week | | 37-Week | | 38-Week | | 39-Week | | Average Value |
|--|-------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|
| Parameters | NAAQS | 04.09.17 | 07.09.17 | 11.09.17 | 14.09.17 | 18.09.17 | 21.09.17 | 25.09.17 | 28.09.17 | |
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60 | 16.1 | 16.8 | 17.2 | 16.5 | 15.0 | 15.3 | 14.6 | 16.0 | 15.94 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 46.8 | 47.5 | 48.7 | 48.1 | 47.8 | 46.9 | 48.3 | 47.7 | 47.73 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.0 | 3.0 | 3.1 | 2.9 | 2.9 | 3.0 | 2.8 | 2.9 | 2.95 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.1 | 3.3 | 3.2 | 3.2 | 3.1 | 3.3 | 3.2 | 3.1 | 3.19 |
| CO (mg/m^3) | 2.0 | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100 | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400 | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1.0 | BDL |
| As (ng/m^3) | 6.0 | BDL |
| (ng/m^3) | 20 | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 05 | BDL |
| B(a)P (ng/m^3) | 01 | BDL |

Note: BDL = Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂ Sulphur dioxide; NO₂ - Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³);O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$);NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$);As-Arsenic (DL 0.1 ng/m³);Ni-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(a)P- Benzo - α -pyrene (DL 0.1 ng/m³); ng/m³: nanogram per cubic meter; $\mu\text{g}/\text{m}^3$ - microgram per cubic meter

CONCLUSION: All the parameters meet the NAAQ Standards

*****End of Report *****

Searched by

Shaila
Prepared by

Shaila
Checked by



Authorized Signatory
[Signature]

1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss/damage caused by use or misuse of test report after involving or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chettnai - 600 083.
Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | Permude Village |
| Report Date | 09.10.2017 |
| Report No | HECS/AA/004/091017 |

CONSOLIDATED TEST RESULTS: SEPTEMBER 2017

| SEPTEMBER '17 - Week | | 36-Week | | 37-Week | | 38-Week | | 39-Week | | Average Value |
|--|-------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|
| Parameters | NAAQS | 04.09.17 | 07.09.17 | 11.09.17 | 14.09.17 | 18.09.17 | 21.09.17 | 25.09.17 | 28.09.17 | |
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60 | 16.0 | 15.3 | 16.4 | 17.1 | 16.9 | 16.5 | 15.9 | 15.1 | 16.15 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 48.5 | 49.0 | 47.4 | 47.9 | 48.8 | 49.3 | 48.2 | 47.6 | 48.34 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.3 | 3.2 | 3.1 | 3.3 | 3.2 | 3.2 | 3.1 | 3.1 | 3.19 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.3 | 3.2 | 3.2 | 3.3 | 3.3 | 3.1 | 3.2 | 3.2 | 3.23 |
| CO (mg/m^3) | 2.0 | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100 | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400 | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1.0 | BDL |
| As (ng/m^3) | 6.0 | BDL |
| (ng/m^3) | 20 | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 05 | BDL |
| B(a)P (ng/m^3) | 01 | BDL |

Note: BDL =Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂- Sulphur dioxide; NO₂ - Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³);O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$);NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$);As-Arsenic (DL 0.1 ng/m³);Ni-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(a)P- Benzo - α -pyrene (DL0.1 ng/m³); ng/m³: nanogram,per cubic meter; $\mu\text{g}/\text{m}^3$ - microgram per cubic meter


CONCLUSION: All the parameters meet the NAAQ Standards

*****End of Report *****

Sampled by

Shruti
Prepared by

Checked by
Shruti



Authorized Signatory

1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss / damage caused by use or misuse of test report after involving or issue of test report. 5. The test results relate only to the test items. 6. #not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | OMPL - West Side |
| Report Date | 09.10.2017 |
| Report No | HECS/AA/005/091017 |

CONSOLIDATED TEST RESULTS: SEPTEMBER 2017

| SEPTEMBER '17 - Week | | 36-Week | | 37-Week | | 38-Week | | 39-Week | | Average Value |
|--|-------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|
| Parameters | NAAQS | 04.09.17 | 07.09.17 | 11.09.17 | 14.09.17 | 18.09.17 | 21.09.17 | 25.09.17 | 28.09.17 | |
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60 | 17.0 | 17.5 | 16.8 | 16.2 | 15.8 | 15.9 | 15.8 | 16.5 | 16.38 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 47.0 | 46.5 | 47.2 | 48.0 | 48.5 | 47.7 | 46.9 | 47.1 | 47.36 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.0 | 3.1 | 3.2 | 3.1 | 3.0 | 3.1 | 3.0 | 3.0 | 3.06 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 2.9 | 2.8 | 2.8 | 2.9 | 3.0 | 2.9 | 2.8 | 3.0 | 2.89 |
| CO (mg/m^3) | 2.0 | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100 | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400 | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1.0 | BDL |
| As (ng/m^3) | 6.0 | BDL |
| Ni (ng/m^3) | 20 | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 05 | BDL |
| B(α)P (ng/m^3) | 01 | BDL |

Note: BDL =Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂-Sulphur dioxde; NO₂ - Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³);O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$);NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$);As-Arsenic (DL 0.1 ng/m³);Ni-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(α)P- Benzo- α -pyrene (DL 0.1 ng/m³); ng/m³ - nanogram per cubic meter; $\mu\text{g}/\text{m}^3$ - microgram per cubic meter

CONCLUSION: All the parameters meet the NAAQ Standards


*****End of Report *****

Sampled by

Prepared by

Checked by
Shailja

Authorized Signatory



Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



ANNEXURE - B

Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: GROUND WATER MONITORING (GWM)

| | |
|-------------------------|---|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | GW1 - Ground Water collected from Narayana Guru Community Hall, Permude |
| Date of Sampling | 16.09.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 09.10.2017 |
| Report No | HECS/W/001/091017 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.61 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 1.3 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 33.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 8.8 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 82.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 8.5 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 4.8 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 143.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 11.0 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | 0.39 | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 8.1 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |


Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Shruti
Prepared by

Shruti
Checked by



Authorized Signatory

E. Pauline
Authorized Signatory

1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss/damage caused by use or misuse of test report after invoicing or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.



TEST REPORT: GROUND WATER MONITORING (GWM)

| | |
|-------------------------|---|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | GW2 - Ground Water collected from Gagtel Labor Colony |
| Date of Sampling | 16.09.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 09.10.2017 |
| Report No | HECS/W/002/091017 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 6.65 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 1.09 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 35.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 8.2 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 35.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 12.8 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 5.1 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 86.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 6.9 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 1.39 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
 MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Shivam
Prepared by

Shivam
Checked by



Lover
Authorized Signatory

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: GROUND WATER MONITORING (GWM)

| | |
|-------------------------|---|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | GW3- Ground Water collected from L&T New Labor Colony |
| Date of Sampling | 16.09.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 09.10.2017 |
| Report No | HECS/W/003/091017 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.68 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 1.28 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 6.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 14.0 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 52.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 16.9 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 6.3 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 137.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 8.5 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 1.32 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
 MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Prepared by

Shailja
Checked by



Shailja
Authorized Signatory

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42986655 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: GROUND WATER MONITORING (GWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | GW4-Ground Water collected Near OMPL – ETP |
| Date of Sampling | 16.09.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 09.10.2017 |
| Report No | HECS/W/004/091017 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.40 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | BDL (DL 0.1) | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 51.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 12.5 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 42.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 17.1 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 4.9 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 140.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 7.63 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 2.00 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;


MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Shreya
Prepared by

Shreya
Checked by



[Signature]
Authorized Signatory

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: krc@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: OPEN WELL WATER MONITORING (OWWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | OW1- Open Water collected from Tenka Ekkar |
| Date of Sampling | 16.09.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 09.10.2017 |
| Report No | HECS/W/005/091017 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.43 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 2.50 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 42.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 8.5 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 42 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 8.4 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 4.9 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 75.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 5.71 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 1.9 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L- Detection limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
 MPN- Most Probable Number; ml-Milliliter


CONCLUSION: OPENWELL WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Prepared by

Checked by

Authorized Signatory



Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: OPEN WELL WATER MONITORING (OWWM)

| | |
|-------------------------|---|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | OW2 - Open Water collected from Shantigudda Village |
| Date of Sampling | 16.09.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 09.10.2017 |
| Report No | HECS/W/006/091017 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.46 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | 2.63 | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | BDL (DL 0.1) | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 30.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 8.20 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 58.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 11.7 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 4.0 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 72.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 5.8 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 2.14 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
 MPN- Most Probable Number; mL-Milliliter

CONCLUSION: OPENWELL WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Prepared by

Checked by

Authorized Signatory



Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: OPEN WELL WATER MONITORING (OWWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | OW3 - Open Water collected from Permude Village |
| Date of Sampling | 16.09.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 09.10.2017 |
| Report No | HECS/W/007/091017 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.20 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 2.62 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 24.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 7.3 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 20.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 11.0 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 4.1 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 48.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 4.0 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 3.1 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;

MPN- Most Probable Number; mL-Milliliter

CONCLUSION: OPENWELL WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Shalva
Prepared by

Shalva
Checked by

Authorized Signatory



Hubert Enviro Care Systems (P) Ltd.
 C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division
 Accredited by NABL in the fields of Chemical
 ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: SURFACE WATER MONITORING (SWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | SW1 - Surface Water collected Near OMPL - Flare Area |
| Date of Sampling | 16.09.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 09.10.2017 |
| Report No | HECS/W/008/091017 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.38 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 2.0 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 171 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 47.0 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 109.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 15.0 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 8.0 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 477 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 65.2 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | 0.30 | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 2.18 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | 0.11 | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per liter; NA-Not Available

CONCLUSION: SURFACE WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Prepared by
Shaila

Checked by
Shaila



[Signature]
 Authorized Signatory

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax : 42985600 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: SURFACE WATER MONITORING (SWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | SW2 - Surface Water collected Near OMPL - Near Central Warehouse |
| Date of Sampling | 16.09.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 09.10.2017 |
| Report No | HECS/W/009/091017 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.05 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 3.8 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 70 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 13.9 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 29 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 63.0 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 7.1 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 160 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 59 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 3.99 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | 0.14 | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per liter

CONCLUSION: SURFACE WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Shiv
Prepared by

Shiv
Checked by



Signature
Authorized Signatory

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

ANNEXURE - C



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: NOISE MONITORING

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Noise Monitoring |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | OMPL – North, South, East and West sides |
| Sampling Date | 16.09.2017 |
| Report Date | 09.10.2017 |
| Report No. | HECS/N/001/091017 |

NOISE MONITORING: SEPTEMBER 2017

| S.No. | Sampling Location | MoEF requirements in dB | | Avg. Noise level observed in dB | |
|-------|-------------------|-------------------------|-------|---------------------------------|-------|
| | | Day | Night | Day | Night |
| 1. | OMPL-North | | | 66.0 | 63.7 |
| 2. | OMPL-South | | | 64.1 | 61.2 |
| 3. | OMPL-East | 75 | 70 | 66.6 | 65.0 |
| 4. | OMPL-West | | | 65.1 | 62.4 |

Note: dB: Decibel


CONCLUSION: All the parameters meet MoEF Standards


*****End of Report *****


Sampled by


Prepared by


Checked by




Authorized Signatory
CHEN
600 083

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.

Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.

Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

ANNEXURE-D



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: ETP EFFULENT MONITORING (ETP EM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Guard Pond Pump Discharge (ETP Effluent) |
| Date of Sampling | 05.09.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 09.10.2017 |
| Report No | HECS/W/011/091017 |

RESULTS

| No. | Parameters monitored | Test method followed | Units | Results | Permissible Limit |
|-----|--|------------------------------------|-------------|--------------|--|
| 1. | Color | IS:3025:(Pt 4)1983 (Reaff 2006) | Hazen Units | 3.0 | All efforts should be made to remove colour and unpleasant odour as far as practicable |
| 2. | Odour | IS 3025 (Part5)-1983, Reaff 2006 | - | Agreeable | |
| 3. | Total suspended Solids | 2540D APHA 22nd Edn.. 2012 | mg/L | 8.7 | 100 |
| 4. | pH | IS:3025:(Pt 11):1983 (Reaff 2006) | - | 6.78 | 6.0-8.5 |
| 5. | Temperature | IS 3025 (Pt 9):1983 (Reaff:2006) | °C | 29.0 | Shall not exceed 5 degree Centigrade above the receiving water temperature |
| 6. | Oil & Grease | IS 3025,4(Pt 39):2000 (Reaff 2009) | mg/L | BDL(DL 1) | 5 |
| 7. | Total Residual Chlorine as Cl ₂ | IS:3025 (Pt26)1986 (Reaff 2009) | mg/L | BDL (DL 0.1) | 1 |
| 8. | Ammonical Nitrogen as N | IS 3025 Part (34)1988 | mg/L | 8.3 | 50 |
| 9. | Total Kjeldhal Nitrogen as N | IS 3025 Part (34)1988 | mg/L | 20.0 | 100 |
| 10. | Free Ammonia as NH ₃ | IS:3025 (Part34)1998 Reaff. 2003 | mg/L | BDL(DL 0.02) | 5 |
| 11. | BOD, 3 days @ 27°C as O ₂ | IS:3025 (Pt 44)1993 (Reaff 2009) | mg/L | 9.4 | 30 |
| 12. | COD as O ₂ | IS 3025 Part (58)2006 | mg/L | 45.0 | 125 |
| 13. | Lead as Pb | IS:3025 (Pt 47)1994 (Reaff 2009) | mg/L | BDL(DL 0.1) | 0.1 |
| 14. | Chromium (Hexavalent) as Cr ⁶⁺ | IS 3025 Part (52):2003 | mg/L | BDL(DL 0.01) | 0.1 |
| 15. | Total Chromium as Cr | IS:3025(Pt52):2003 (Reaff 2009) | mg/L | BDL(DL 0.01) | 2.0 |
| 16. | Copper as Cu | IS:3025:5,(Pt 42)1992 (Reaff 2009) | mg/L | BDL(DL 0.05) | 1.0 |
| 17. | Zinc as Zn | IS:3025 (Part49)1994 (Reaff 2009) | mg/L | BDL(DL 0.1) | 5.0 |

Shoba
Prepared by

Shoba
Checked by



Authorized Signatory

1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss/damage caused by use or misuse of test report after involving or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011,
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42986555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: ETP EFFULENT MONITORING (ETP EM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Guard Pond Pump Discharge (ETP Effluent) |
| Date of Sampling | 05.09.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 09.10.2017 |
| Report No | HECS/W/011/091017 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | Permissible Limit |
|-------|--|-----------------------------------|-------|---------------------------|--|
| 18. | Nickel as Ni | IS:3025 (Part54)2003 (Reaff 2009) | mg/L | BDL(DL 0.05) | 1.0 |
| 19. | Fluoride as F- | IS 3025 part (60):2008 | mg/L | BDL(DL 0.2) | 1.0 |
| 20. | Sulphide as S ²⁻ | IS:3025 (Pt 29)1986 (Reaff 2009) | mg/L | BDL(DL 0.04) | 2.0 |
| 21. | Particle Size of Suspended solids | APHA 22nd Edition | - | Passed through 850 micron | 850 micron |
| 22. | Arsenic as As | IS:3025 (Part37)1988(Reaff 2009) | mg/L | BDL(DL 0.005) | 0.2 |
| 23. | Mercury as Hg | IS:3025 (Part48)1994 RA 1999 | mg/L | BDL(DL 0.001) | 0.01 |
| 24. | Cadmium as Cd | IS:3025 (Part41)1991 | mg/L | BDL(DL 0.01) | 0.1 |
| 25. | Selenium as Se | IS:3025 (Part56)2003 | mg/L | BDL(DL 0.005) | 0.05 |
| 26. | Cyanide as CN | IS:3025 (Part27)1986 Reaff. 2009 | mg/L | BDL(DL 0.01) | 0.2 |
| 27. | Phenolic Compounds as C ₆ H ₅ OH | IS 3025 Part (43)1992,RA 2009 | mg/L | BDL(DL 0.001) | 0.35 |
| 28. | Total Iron as Fe | IS 3025(Pt 53):2003(Reaff 2009) | mg/L | 0.26 | 3 |
| 29. | Manganese | IS:3025:(Pt-59):2006 | mg/L | BDL(DL 0.01) | 2 |
| 30. | Total Phosphorous as P | IS 3025(Pt 31):1988(Reaff 2009) | mg/L | BDL(DL 0.01) | 3 |
| 31. | Nitrate | IS 3025 (Pt 34):1988 (Reaff 2009) | mg/L | BDL(DL 1) | 20 |
| 32. | Vanadium as V | IS:3025 (Part56)2003 | mg/L | BDL(DL 0.01) | 0.1 |
| 33. | Benzo(a)pyrene | USEPA 8270C | mg/L | BDL(DL 0.0001) | 0.2 |
| 34. | Benzene | USEPA 8270C | mg/L | BDL(DL 0.0001) | 0.1 |
| 35. | Bioassay Test | IS 6582(Part 2):2001 | Tf | 9:1 | 90% survival of fish after 96 hrs in 100% effluent |


Note:-BDL - Below Detection Limit; D.L- Detection Limit; mg/L - Milligrams per liter

CONCLUSION: ETP OUTLET EFFULENT WATER AS ABOVE PARAMETERS ARE WITHIN STANDARDS

End of Report

Shyam
Prepared by

Charita
Checked by



Hubert Enviro Care
CHENNAI
600 083
09/10/2017
Authorized Signatory

1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss/damage caused by use or misuse of test report after Invoicing or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 576011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42986555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: ETP EFFLUENT MONITORING (ETP EM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Guard Pond Pump Discharge (ETP Effluent) |
| Date of Sampling | 16.09.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 09.10.2017 |
| Report No | HECS/W/015/091017 |


RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | Permissible Limit |
|-------|--|------------------------------------|-------------|--------------|--|
| 1. | Color | IS:3025:(Pt 4)1983 (Reaff 2006) | Hazen Units | 3.1 | All efforts should be made to remove colour and unpleasant odour as far as practicable |
| 2. | Odour | IS 3025 (Part5)-1983, Reaff 2006 | - | Agreeable | |
| 3. | Total suspended Solids | 2540D APHA 22nd Edn., 2012 | mg/L | 8.9 | 100 |
| 4. | pH | IS:3025:(Pt 11):1983 (Reaff 2006) | - | 7.3 | 6.0-8.5 |
| 5. | Temperature | IS 3025 (Pt 9):1983 (Reaff:2006) | °C | 28.0 | Shall not exceed 5 degree Centigrade above the receiving water temperature |
| 6. | Oil & Grease | IS 3025,4(Pt 39):2000.(Reaff 2009) | mg/L | BDL(DL 1) | 5 |
| 7. | Total Residual Chlorine as Cl ₂ | IS:3025 (Pt26)1986 (Reaff 2009) | mg/L | BDL (DL 0.1) | 1 |
| 8. | Ammonical Nitrogen as N | IS 3025 Part (34)1988 | mg/L | 8.6 | 50 |
| 9. | Total Kjeldhal Nitrogen as N | IS 3025 Part (34)1988 | mg/L | 16.9 | 100 |
| 10. | Free Ammonia as NH ₃ | IS:3025 (Part34)1998 Reaff. 2003 | mg/L | BDL(DL 0.02) | 5 |
| 11. | BOD, 3 days @ 27°C as O ₂ | IS:3025 (Pt 44)1993 (Reaff 2009) | mg/L | 9.8 | 30 |
| 12. | COD as O ₂ | IS 3025 Part (58)2006 | mg/L | 48.0 | 125 |
| 13. | Lead as Pb | IS:3025 (Pt 47)1994 (Reaff 2009) | mg/L | BDL(DL 0.1) | 0.1 |
| 14. | Chromium (Hexavalent) as Cr ⁶⁺ | IS 3025 Part (52):2003 | mg/L | BDL(DL 0.01) | 0.1 |
| 15. | Total Chromium as Cr | IS 3025(Pt52):2003 (Reaff 2009) | mg/L | BDL(DL 0.01) | 2.0 |
| 16. | Copper as Cu | IS:3025:5,(Pt 42)1992 (Reaff 2009) | mg/L | BDL(DL 0.05) | 1.0 |
| 17. | Zinc as Zn | IS:3025 (Part49)1994 (Reaff 2009) | mg/L | BDL(DL 0.1) | 5.0 |

Prepared by

Checked by

Authorized Signatory



Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.

Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.

Ph: 42985555 Fax : 42985600 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: ETP EFFLUENT MONITORING (ETP EM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Guard Pond Pump Discharge (ETP Effluent) |
| Date of Sampling | 16.09.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 09.10.2017 |
| Report No | HECS/W/015/091017 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | Permissible Limit |
|-------|--|-----------------------------------|-------|---------------------------|--|
| 18. | Nickel as Ni | IS:3025 (Part54)2003 (Reaff 2009) | mg/L | BDL(DL 0.05) | 1.0 |
| 19. | Fluoride as F- | IS 3025 part (60):2008 | mg/L | BDL(DL 0.2) | 1.0 |
| 20. | Sulphide as S ²⁻ | IS:3025 (Pt 29)1986 (Reaff 2009) | mg/L | BDL(DL 0.04) | 2.0 |
| 21. | Particle Size of Suspended solids | APHA 22nd Edition | | Passed through 850 micron | 850 micron |
| 22. | Arsenic as As | IS:3025 (Part37)1988(Reaff 2009) | mg/L | BDL(DL 0.005) | 0.2 |
| 23. | Mercury as Hg | IS:3025 (Part48)1994 RA 1999 | mg/L | BDL(DL 0.001) | 0.01 |
| 24. | Cadmium as Cd | IS:3025 (Part41)1991 | mg/L | BDL(DL 0.01) | 0.1 |
| 25. | Selenium as Se | IS:3025 (Part56)2003 | mg/L | BDL(DL 0.005) | 0.05 |
| 26. | Cyanide as CN | IS:3025 (Part27)1986 Reaff. 2009 | mg/L | BDL(DL 0.01) | 0.2 |
| 27. | Phenolic Compounds as C ₆ H ₅ OH | IS 3025 Part (43)1992,RA 2009 | mg/L | BDL(DL 0.001) | 0.35 |
| 28. | Total Iron as Fe | IS 3025(Pt 53):2003(Reaff 2009) | mg/L | 0.19 | 3 |
| 29. | Manganese | IS:3025:(Pt-59):2006 | mg/L | BDL(DL 0.01) | 2 |
| 30. | Total Phosphorous as P | IS 3025(Pt 31):1988(Reaff 2009) | mg/L | BDL(DL 0.01) | 3 |
| 31. | Nitrate | IS 3025 (Pt 34):1988 (Reaff 2009) | mg/L | BDL(DL 1) | 20 |
| 32. | Vanadium as V | IS:3025 (Part56)2003 | mg/L | BDL(DL 0.01) | 0.1 |
| 33. | Benzo(a)pyrene | USEPA 8270C | mg/L | BDL(DL 0.0001) | 0.2 |
| 34. | Benzene | USEPA 8270C | mg/L | BDL(DL 0.0001) | 0.1 |
| 35. | Bioassay Test | IS 6582(Part 2):2001 | Tf | 9:1 | 90% survival of fish after 96 hrs in 100% effluent |


Note:- BDL - Below Detection Limit; D.L- Detection Limit; mg/L - Milligrams per liter

CONCLUSION: ETP OUTLET EFFLUENT WATER AS ABOVE PARAMETERS ARE WITHIN STANDARDS

End of Report

Prepared by

Checked by
Shaila



Authorized Signatory

ANNEXURE - E

Form-1 (Rule 4)
Returns Regarding Water Consumed during the Month of September, 2017

| Name and address of the Consumer | Purpose for which water consumed | Reading at the beginning of the first day of the calendar month under report | Reading at the end of the last day of the calendar month under report | Quantity of Water Consumed in Kilo Liters | If the meter was out of order, the monthly average consumption of water for the previous 3 months of the working period | Quantity of water qualifying for rebate according to the assessee | Remarks |
|---|---|--|---|---|---|---|---------|
| | Industrial cooling, spraying in mine pits or boiler feed | | | | | | |
| | Cooling Water | 0 | | 86981 | 86981 | | |
| | Boiler Feed Water | 0 | | 78187 | 78187 | | |
| M/s ONGC Mangalore Petrochemicals Limited, Mangalore Special Economic Zone, Permude, Mangalore -574 509 | Fire Water | 0 | | 27312 | 27312 | | |
| | Domestic purpose | | | | | | |
| | Drinking Water & Sanitation | 0 | | 2498 | 2498 | | |
| | Processing whereby water gets polluted and the pollutants are easily bio-degradable | | | | | | |
| | Service Water | | | 3625 | 3625 | | |
| | Total Consumption | | | ~198603 | ~198603 | | |

Signature of the Consumer:

Shivaprakash, Manager(Env)

Name

Address

M/s ONGC Mangalore Petrochemicals Limited, Mangalore Special Economic Zone, Permude, Mangalore -574 509


ANNEXURE -F

ONGC Mangalore Petrochemicals Limited

Production Details for September, 2017

Net Naphtha Processed – 110698 MT

| Sl. No. | Name of the Product | Quantity, MT |
|----------------|----------------------------|---------------------|
| 1 | Paraxylene (Product) | 60306 |
| 2 | Benzene (Co product) | 14852 |

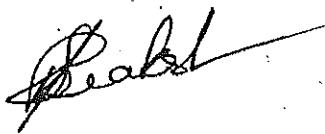

ओएनजीसी मंगलूर पेट्रोकेमिकल्स लिमिटेड

(मंगलूर रिफाइनरी एण्ड पेट्रोकेमिकल्स लिमिटेड की सहायक कंपनी).

ONGC Mangalore Petrochemicals Limited

(A Subsidiary of Mangalore Refinery and Petrochemicals Ltd.)

एमएसईजे, पेरुदे, मंगलूरु MSEZ, Permude, Mangaluru - 574 509 CIN: U40107KA2006PLC041258

दूरभाष Landline:- 0824-2872000, फैक्स Fax:- 0824-2872005, Website: www.ompl.co.in

REF: OMPL/PCB/SP/2017-18/

Date: 20/11/2017

To:
The Environmental Officer
Regional Office
KSPCB
Baikampady, Mangalore-11

Dear Sir,


Sub: Submission of Environmental Monitoring Report for the Month of October 2017, Production Report for October 2017 & Returns Regarding Water Consumed for the Month of October, 2017

Ref: KSPCB Combined Consent Order No. AW-301949 dated 27th January, 2017

With respect to the above subject; we are herewith submitting the following Environmental Monitoring Reports, Production Reports & Returns Regarding Water Consumed in the Month of October 2017 respectively, enclosed herewith.

1. Ambient Air Quality Monitoring at 5 different locations in and around OMPL, enclosed as Annexure-A
2. Water Analysis Reports at 9 different locations in and around OMPL, as Annexure-B
3. Noise Level Monitoring Report at OMPL, as Annexure-C
4. Treated Effluent Analysis Report -D
5. Returns Regarding Water Consumed, for the Month of October 2017, as Annexure-E
6. Production Report as Annexure-F

Thanking You,


Shrivaprasad
Manager (Env)

CC: Member Secretary, KSPCB, Bangalore

CC: Head (Technical), MSEZ

CC: CEO, OMPL for Info

CC: COO, OMPL for Info



ANNEXURE-A

Certificate No. T-3180

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | OMPL - East Side |
| Report Date | 03.11.2017 |
| Report No | HECS/AA/001/031117 |

CONSOLIDATED TEST RESULTS: OCTOBER 2017

| OCTOBER '17 - Week | | 40-Week | | 41-Week | | 42-Week | | 43-Week | | 44-Week | Average Value |
|--|-------|----------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|
| Parameters | NAAQS | 02.10.17 | 05.10.17 | 09.10.17 | 12.10.17 | 16.10.17 | 19.10.17 | 23.10.17 | 26.10.17 | 30.10.17 | |
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60 | 17.8 | 13.7 | 17.3 | 18.3 | 17.4 | 18.9 | 18.6 | 17.1 | 18.4 | 18.06 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 48.6 | 49.7 | 48.2 | 48.8 | 48.3 | 49.8 | 49.5 | 47.9 | 49.1 | 48.88 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.8 | 4.0 | 3.6 | 3.8 | 3.6 | 4.1 | 4.0 | 3.7 | 3.8 | 3.82 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 4.1 | 4.2 | 4.1 | 4.1 | 4.0 | 4.3 | 4.1 | 4.0 | 4.2 | 4.12 |
| CO (mg/m^3) | 2.0 | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100 | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400 | BDL |
| Pb (Pb) ($\mu\text{g}/\text{m}^3$) | 1.0 | BDL |
| As (As) (ng/m^3) | 6.0 | BDL |
| Ni (Ni) ($\mu\text{g}/\text{m}^3$) | 20 | BDL |
| Benzene (Benzene) ($\mu\text{g}/\text{m}^3$) | 05 | BDL |
| B(a)P (B(a)P) (ng/m^3) | 01 | BDL |

Note: BDL =Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂ Sulphur dioxide; NO₂ - Nitrogen-di-oxide; CO - Carbon-Mono Oxide(DL 0.1 mg/m³); O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$); NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$); As-Arsenic (DL 0.1 ng/m³); Ni-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(a)P- Benzo - α -pyrene (DL 0.1 ng/m³); ng/m³: nanogram per cubic meter; $\mu\text{g}/\text{m}^3$ - microgram per cubic meter .

CONCLUSION: All the parameters meet the NAAQ Standards

*****End of Report *****

Sampled by

Prepared by

Shilpa
Checked by

Hubert Enviro Care Systems (P) Ltd
CHENNAI - 600 083
Authorized Signatory

1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are retained by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss/damage caused by use or misuse of test report after involving or issue of test report. 5. The test results relate only to the samples tested and not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-46, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011:

Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.

Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical

ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | Shantigudda |
| Report Date | 03.11.2017 |
| Report No | HECS/AA/002/031117 |

CONSOLIDATED TEST RESULTS: OCTOBER 2017

| OCTOBER '17 - Week | | 40-Week | | 41-Week | | 42-Week | | 43-Week | | 44-Week | Average Value |
|--|-------|----------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|
| Parameters | NAAQS | 02.10.17 | 05.10.17 | 09.10.17 | 12.10.17 | 16.10.17 | 19.10.17 | 23.10.17 | 26.10.17 | 30.10.17 | |
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60 | 19.3 | 19.0 | 18.6 | 19.5 | 18.7 | 19.1 | 18.5 | 18.9 | 19.2 | 18.98 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 51.0 | 50.7 | 50.3 | 51.2 | 50.5 | 50.8 | 50.0 | 50.5 | 50.9 | 50.66 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.9 | 3.8 | 3.6 | 3.9 | 3.6 | 3.7 | 3.6 | 3.7 | 3.8 | 3.73 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.4 | 3.2 | 3.2 | 3.6 | 3.1 | 3.3 | 3.1 | 3.2 | 3.4 | 3.28 |
| CO (mg/m^3) | 2.0 | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100 | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400 | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1.0 | BDL |
| As (ng/m^3) | 6.0 | BDL |
| NO _x (mg/m^3) | 20 | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 05 | BDL |
| B(a)P (ng/m^3) | 01 | BDL |

Note: BDL = Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂-Sulphur dioxide; NO₂ - Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³); O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$); NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$); As-Arsenic (DL 0.1 ng/m³); Ni-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(a)P- Benzo -a-pyrene (DL 0.1 ng/m³); ng/m³: nanogram per cubic meter; $\mu\text{g}/\text{m}^3$ - microgram per cubic meter


CONCLUSION: All the parameters meet the NAAQ Standards

*****End of Report*****

Sampled by

Prepared by

Checked by

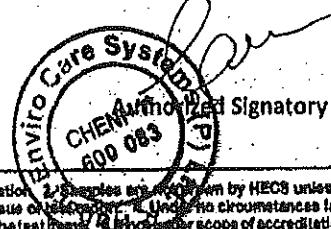

1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are retained by HECS unless otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss / damage caused by use or misuse of test report after invoicing or issue of test report. 5. The test results relate only to the test items. 6. Within the scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.

Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.

Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical

ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|---|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509. |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | Tenka Ekkar |
| Report Date | 03.11.2017 |
| Report No. | HECS/AA/003/031117 |

CONSOLIDATED TEST RESULTS: OCTOBER 2017

| OCTOBER '17 - Week | | 40-Week | | 41-Week | | 42-Week | | 43-Week | | 44-Week | Average Value |
|--|-------|----------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|
| Meters | NAAQS | 02.10.17 | 05.10.17 | 09.10.17 | 12.10.17 | 16.10.17 | 19.10.17 | 23.10.17 | 26.10.17 | 30.10.17 | |
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60 | 17.8 | 17.2 | 18.3 | 17.0 | 17.5 | 18.1 | 17.9 | 17.4 | 18.0 | 17.69 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 49.5 | 48.7 | 50.2 | 48.6 | 49.3 | 50.0 | 49.7 | 49.2 | 49.9 | 49.46 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.2 | 3.0 | 3.5 | 3.0 | 3.1 | 3.4 | 3.2 | 3.1 | 3.2 | 3.19 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.4 | 3.4 | 3.6 | 3.4 | 3.4 | 3.6 | 3.4 | 3.3 | 3.5 | 3.44 |
| CO (mg/m^3) | 2.0 | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100 | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400 | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1.0 | BDL |
| As (ng/m^3) | 6.0 | BDL |
| Ni (ng/m^3) | 20 | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 05 | BDL |
| B(a)P (ng/m^3) | 01 | BDL |

Note: BDL =Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂ - Sulphur dioxide; NO₂ - Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³);O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$);NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$);As-Arsenic (DL 0.1 ng/m³);Ni-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(a)P- Benzo- α -pyrene (DL 0.1 ng/m³); ng/m³: nanogram per cubic meter; $\mu\text{g}/\text{m}^3$ - microgram per cubic meter


CONCLUSION: All the parameters meet the NAAQ Standards

*****End of Report *****

Sampled by

Prepared by

Checked by

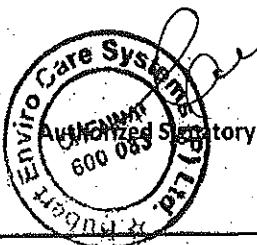

1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 60 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss/damage caused by use or misuse of test report after involving or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.
 C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax: 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
 ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | Permude Village |
| Report Date | 03.11.2017 |
| Report No | HECS/AA/004/031117 |

CONSOLIDATED TEST RESULTS: OCTOBER 2017

| OCTOBER '17 - Week | | 40-Week | | 41-Week | | 42-Week | | 43-Week | | 44-Week | Average Value |
|--|-------|----------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|
| Parameters | NAAQS | 02.10.17 | 05.10.17 | 09.10.17 | 12.10.17 | 16.10.17 | 19.10.17 | 23.10.17 | 26.10.17 | 30.10.17 | |
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60 | 17.8 | 17.5 | 18.1 | 17.3 | 17.6 | 18.2 | 17.2 | 17.7 | 18.0 | 17.71 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 49.8 | 49.4 | 50.0 | 49.4 | 49.5 | 50.2 | 49.2 | 49.7 | 49.9 | 49.68 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.2 | 3.1 | 3.4 | 3.1 | 3.2 | 3.4 | 3.1 | 3.2 | 3.2 | 3.21 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.3 | 3.2 | 3.3 | 3.4 | 3.2 | 3.4 | 3.3 | 3.2 | 3.3 | 3.29 |
| CO (mg/m^3) | 2.0 | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100 | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400 | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1.0 | BDL |
| As (ng/m^3) | 6.0 | BDL |
| NI (ng/m^3) | 20 | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 05 | BDL |
| B(α)P (ng/m^3) | 01 | BDL |

Note: BDL =Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂- Sulphur dioxide; NO₂ - Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³); O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$); NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$); As-Arsenic (DL 0.1 ng/m³); NI-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(α)P- Benzo - α -pyrene (DL 0.1 ng/m³); ng/m³: nanogram per cubic meter; $\mu\text{g}/\text{m}^3$ - microgram per cubic meter

CONCLUSION: All the parameters meet the NAAQ Standards

*****End of Report *****

Sampled by

Prepared by

Checked by



1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss / damage caused by use or misuse of test report after invoicing or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.



Certificate No. T-3180

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | OMPL - West Side |
| Report Date | 03.11.2017 |
| Report No | HECS/AA/005/031117 |

CONSOLIDATED TEST RESULTS: OCTOBER 2017

| OCTOBER '17 - Week | | 40-Week | | 41-Week | | 42-Week | | 43-Week | | 44-Week | Average Value |
|--|-------|----------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|
| Parameters | NAAQS | 02.10.17 | 05.10.17 | 09.10.17 | 12.10.17 | 16.10.17 | 19.10.17 | 23.10.17 | 26.10.17 | 30.10.17 | |
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60 | 17.7 | 18.5 | 17.8 | 17.1 | 18.6 | 18.2 | 17.6 | 18.4 | 17.9 | 17.98 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 47.8 | 48.7 | 48.0 | 47.4 | 48.9 | 48.2 | 47.5 | 48.6 | 48.1 | 48.13 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.3 | 3.3 | 3.2 | 3.3 | 3.3 | 3.2 | 3.2 | 3.3 | 3.2 | 3.26 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.2 | 3.1 | 3.1 | 3.0 | 3.2 | 3.1 | 3.2 | 3.1 | 3.2 | 3.13 |
| CO (mg/m^3) | 2.0 | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100 | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400 | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1.0 | BDL |
| As (ng/m^3) | 6.0 | BDL |
| Ni (ng/m^3) | 20 | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 05 | BDL |
| B(a)P (ng/m^3) | 01 | BDL |

Note: BDL =Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂- Sulphur dioxide; NO₂ - Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³);O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$);NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$); As-Arsenic (DL 0.1 ng/m³); Ni-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(a)P- Benzo- α -pyrene (DL 0.1 ng/m³); ng/m³: nanogram per cubic meter; $\mu\text{g}/\text{m}^3$ - microgram per cubic meter


CONCLUSION: All the parameters meet the NAAQ Standards

*****End of Report *****

Sampled by

Prepared by

Checked by

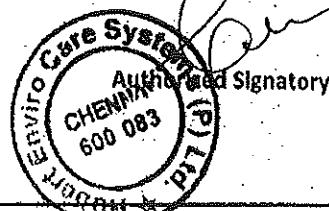

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.

Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.

Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical

ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: GROUND WATER MONITORING (GWM)

| | |
|-------------------------|---|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | GW1 - Ground Water collected from Narayana Guru Community Hall, Permude |
| Date of Sampling | 14.10.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 03.11.2017 |
| Report No | HECS/W/001/031117 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.84 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 1.7 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 42.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 9.1 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 93.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 9.4 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 5.6 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 165.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 14.0 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | 0.46 | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 8.9 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L. - Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;

MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Prepared by

Checked by



The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss/damage caused by use or misuse of test report after issuing or issue of test report. 5. The test results relate only to the test items. 6. # not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: GROUND WATER MONITORING (GWM)

| | |
|-------------------------|---|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore – 574509 |
| Sample Description | GW2 - Ground Water collected from Gagtel Labor Colony |
| Date of Sampling | 14.10.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 03.11.2017 |
| Report No | HECS/W/002/031117 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 6.81 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 1.21 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 45.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 9.0 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 39.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 13.1 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 5.8 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 93.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 7.2 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 1.66 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |


Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
 MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

[Signature]
Prepared by

[Signature]
Checked by



Authorized Signatory

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: GROUND WATER MONITORING (GWM)

| | |
|-------------------------|---|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | GW3- Ground Water collected from L&T New Labor Colony |
| Date of Sampling | 14.10.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 03.11.2017 |
| Report No | HECS/W/003/031117 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.88 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 1.37 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 7.1 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 14.8 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 65.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 17.3 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 7.8 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 153.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 9.4 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 1.57 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |


Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
 MPN- Most Probable Number; ml-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Prepared by

Checked by



Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011,
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
H.O.:# 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: GROUND WATER MONITORING (GWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | GW4-Ground Water collected Near OMPL - ETP |
| Date of Sampling | 14.10.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 03.11.2017 |
| Report No | HECS/W/004/031117 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.77 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | BDL (DL 0.1) | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 69.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 13.7 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 53.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 18.6 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 5.9 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 168.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 8.11 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 2.61 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria. | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |


Note:-BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Prepared by

Checked by

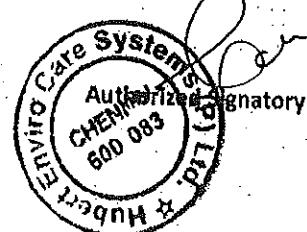

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax: 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: OPEN WELL WATER MONITORING (OWWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore – 574509 |
| Sample Description | OW1- Open Water collected from Tenka Ekkar |
| Date of Sampling | 14.10.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 03.11.2017 |
| Report No | HECS/W/005/031117 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.76 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 2.71 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 58.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 9.5 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 53.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 9.7 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 5.6 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 81.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 6.12 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 2.16 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |


Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
MPN- Most Probable Number; mL-Milliliter

CONCLUSION: OPENWELL WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Prepared by

Checked by

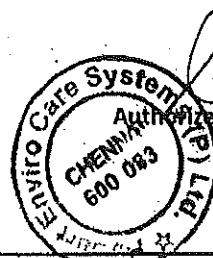

1. This report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss/damage caused by use or misuse of test report after invoicing or issue of test report. 5. The test results relate only to the test items. 6. It is under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-46, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.:# 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: OPEN WELL WATER MONITORING (OWWM)

| | |
|-------------------------|---|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | OW2 - Open Water collected from Shantigudda Village |
| Date of Sampling | 14.10.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 03.11.2017 |
| Report No | HECS/W/006/031117 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.79 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | 2.83 | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | BDL (DL 0.1) | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 55.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 8.94 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 66.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 12.7 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 5.9 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 86.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 6.6 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 2.41 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
 MPN- Most Probable Number; mL-Milliliter

CONCLUSION: OPENWELL WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Prepared by

Checked by



Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.

Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O. # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.

Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: OPEN WELL WATER MONITORING (OWWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | OW3 - Open Water collected from Permude Village |
| Date of Sampling | 14.10.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 03.11.2017 |
| Report No | HECS/W/007/031117 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.49 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 2.83 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 48.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 8.2 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 26.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 12.0 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 4.8 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 57.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 5.1 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 4.2 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
MPN- Most Probable Number; mL-Milliliter

CONCLUSION: OPENWELL WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

Prepared by

End of Report

Checked by



Enviro Care Systems
CHENNAI
600 083
03/11/2017

Marked Signatory

Hubert Enviro Care Systems (P) Ltd.

C-45 Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: SURFACE WATER MONITORING (SWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | SW1 - Surface Water collected Near OMPL - Flare Area |
| Date of Sampling | 14.10.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 03.11.2017 |
| Report No. | HECS/W/008/031117 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.64 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 2.26 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 186 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 56.0 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 129.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 16.1 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 9.5 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 495 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 71.6 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | 0.51 | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 2.46 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | 0.28 | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |


Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per liter; NA-Not Available

CONCLUSION: SURFACE WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Prepared by

Checked by



Authorized Signatory

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: SURFACE WATER MONITORING (SWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | SW2 - Surface Water collected Near OMPL - Near Central Warehouse |
| Date of Sampling | 14.10.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 03.11.2017 |
| Report No | HECS/W/009/031117 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.37 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 4.9 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 86 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 14.3 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 37 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 72 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 8.5 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 179 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 61 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 4.28 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | 0.27 | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coli form Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |


Note:- BDL - Below Detection Limit; DL - Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per liter

CONCLUSION: SURFACE WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Diliprao
Prepared by

Shalpa
Checked by

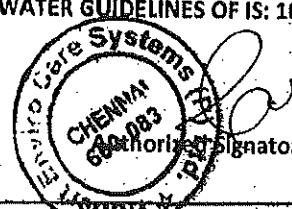

1. The report (in full or part) shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss/damage caused by use or misuse of test report after invoicing or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.
 C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division
 Accredited by NABL in the fields of Chemical
 ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: NOISE MONITORING

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Noise Monitoring |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | OMPL – North, South, East and West sides |
| Sampling Date | 14.10.2017 |
| Report Date | 03.11.2017 |
| Report No. | HECS/N/001/031117 |

NOISE MONITORING: OCTOBER 2017

| S.No. | Sampling Location | MoEF requirements in dB | | Avg. Noise level observed in dB | |
|-------|-------------------|-------------------------|-------|---------------------------------|-------|
| | | Day | Night | Day | Night |
| 1. | OMPL-North | | | 68.2 | 66.8 |
| 2. | OMPL-South | | | 67.4 | 64.0 |
| 3. | OMPL-East | 75 | 70 | 69.1 | 67.2 |
| 4. | OMPL-West | | | 67.7 | 65.5 |

Note: dB: Decibel


CONCLUSION: All the parameters meet MoEF Standards

*****End of Report *****

Sampled by

Prepared by

Checked by

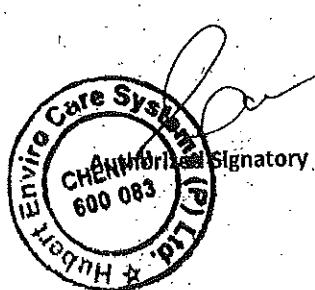

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985556 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
 ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: ETP EFFULENT MONITORING (ETP EM)


| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Guard Pond Pump Discharge (ETP Effluent) |
| Date of Sampling | 03.10.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 03.11.2017 |
| Report No | HECS/W/011/031117 |

RESULTS

| No. | Parameters monitored | Test method followed | Units | Results | Permissible Limit |
|-----|--|------------------------------------|-------------|--------------|--|
| 1. | Color | IS:3025:(Pt 4)1983 (Reaff 2006) | Hazen Units | 3.6 | All efforts should be made to remove colour and unpleasant odour as far as practicable |
| 2. | Odour | IS 3025 (Part5)-1983, Reaff 2006 | | Agreeable | |
| 3. | Total suspended Solids | 2540D APHA 22nd Edn.. 2012 | mg/L | 10.2 | 100 |
| 4. | pH | IS:3025:(Pt 11):1983 (Reaff 2006) | | 7.08 | 6.0-8.5 |
| 5. | Temperature | IS 3025 (Pt 9):1983 (Reaff:2006) | °C | 30.0 | Shall not exceed 5 degree Centigrade above the receiving water temperature |
| | Oil & Grease | IS 3025,4(Pt 39):2000 (Reaff 2009) | mg/L | BDL(DL 1) | 5 |
| | Total Residual Chlorine as Cl ₂ | IS:3025 (Pt26)1986 (Reaff 2009) | mg/L | BDL (DL 0.1) | 1 |
| 8. | Ammonical Nitrogen as N | IS 3025 Part (34)1988 | mg/L | 9.6 | 50 |
| 9. | Total Kjeldhal Nitrogen as N | IS 3025 Part (34)1988 | mg/L | 34.0 | 100 |
| 10. | Free Ammonia as NH ₃ | IS:3025 (Part34)1998 Reaff. 2003 | mg/L | BDL(DL 0.02) | 5 |
| 11. | BOD, 3 days @ 27°C as O ₂ | IS:3025 (Pt 44)1993 (Reaff 2009) | mg/L | 10.8 | 30 |
| 12. | COD as O ₂ | IS 3025 Part (58)2006 | mg/L | 66.0 | 125 |
| 13. | Lead as Pb | IS:3025 (Pt 47)1994 (Reaff 2009) | mg/L | BDL(DL 0.1) | 0.1 |
| 14. | Chromium (Hexavalent) as Cr ⁶⁺ | IS 3025 Part (52):2003 | mg/L | BDL(DL 0.01) | 0.1 |
| 15. | Total Chromium as Cr | IS 3025(Pt52):2003 (Reaff 2009) | mg/L | BDL(DL 0.01) | 2.0 |
| 16. | Copper as Cu | IS:3025,5,(Pt 42)1992 (Reaff 2009) | mg/L | BDL(DL 0.05) | 1.0 |
| 17. | Zinc as Zn | IS:3025 (Part49)1994 (Reaff 2009) | mg/L | | 5.0 |

Prepared by

Sridevi
Checked by



Signatory

1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. All samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss/damage caused by use or misuse of test report after invoicing or issue of test report. 5. The test results relate only to the test items. 6. #not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.
 C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: krc@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
 ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: ETP EFFLUENT MONITORING (ETP EM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Guard Pond Pump Discharge (ETP Effluent) |
| Date of Sampling | 03.10.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 03.11.2017 |
| Report No | HECS/W/011/031117 |

RESULTS

| No. | Parameters monitored | Test method followed | Units | Results | Permissible Limit |
|-----|-----------------------------------|-----------------------------------|-------|---------------------------|--|
| 18. | Nickel as Ni | IS:3025 (Part54)2003 (Reaff 2009) | mg/L | BDL(DL 0.05) | 1.0 |
| 19. | Fluoride as F- | IS 3025 part (60):2008 | mg/L | BDL(DL 0.2) | 1.0 |
| 20. | Sulphide as S ²⁻ | IS:3025 (Pt 29)1986 (Reaff 2009) | mg/L | BDL(DL 0.04) | 2.0 |
| 21. | Particle Size of Suspended solids | APHA 22nd Edition | - | Passed through 850 micron | 850 micron |
| 22. | Arsenic as As | IS:3025 (Part37)1988(Reaff 2009) | mg/L | BDL(DL 0.005) | 0.2 |
| 23. | Mercury as Hg | IS:3025 (Part48)1994 RA 1999 | mg/L | BDL(DL 0.001) | 0.01 |
| 24. | Cadmium as Cd | IS:3025 (Part41)1991 | mg/L | BDL(DL 0.01) | 0.1 |
| 25. | Selenium as Se | IS:3025 (Part56)2003 | mg/L | BDL(DL 0.005) | 0.05 |
| 26. | Cyanide as CN | IS:3025 (Part27)1986 Reaff. 2009 | mg/L | BDL(DL 0.01) | 0.2 |
| 27. | Phenolic Compounds as C6H5OH | IS 3025 Part (43)1992,RA 2009 | mg/L | BDL(DL 0.001) | 0.35 |
| 28. | Total Iron as Fe | IS 3025(Pt 53):2003(Reaff 2009) | mg/L | 0.41 | 3 |
| 29. | Manganese | IS:3025:(Pt-59):2006 | mg/L | BDL(DL 0.01) | 2 |
| 30. | Total Phosphorous as P | IS 3025(Pt 31):1988(Reaff 2009) | mg/L | BDL(DL 0.01) | 3 |
| 31. | Nitrate | IS 3025 (Pt 34):1988 (Reaff 2009) | mg/L | BDL(DL 1) | 20 |
| 32. | Vanadium as V | IS:3025 (Part56)2003 | mg/L | BDL(DL 0.01) | 0.1 |
| 33. | Benzo(a)pyrene | USEPA 8270C | mg/L | BDL(DL 0.0001) | 0.2 |
| 34. | Benzene | USEPA 8270C | mg/L | BDL(DL 0.0001) | 0.1 |
| 35. | Bioassay Test | IS 6582(Part 2):2001 | Tf | 9:1 | 90% survival of fish after 96 hrs in 100% effluent |


Note:-BDL - Below Detection Limit; D.L- Detection Limit; mg/L - Milligrams per liter

CONCLUSION: ETP OUTLET EFFLUENT WATER AS ABOVE PARAMETERS ARE WITHIN STANDARDS

End of Report

Prepared by

Shiva
Checked by

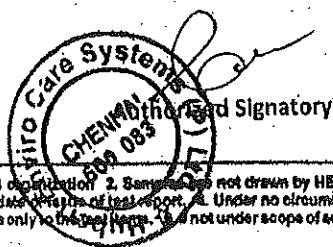

1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not drawn by HECS unless or otherwise monitored. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss / damage caused by use or misuse of test report after invoicing or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax: 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: ETP EFFLUENT MONITORING (ETP EM)


| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premudé Village, Mangalore - 574509 |
| Sample Description | Guard Pond Pump Discharge (ETP Effluent) |
| Date of Sampling | 14.10.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 03.11.2017 |
| Report No | HECS/W/015/031117 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | Permissible Limit |
|-------|--|------------------------------------|--------------|--------------|--|
| 1. | Color | IS:3025:(Pt 4)1983 (Reaff 2006) | Hazen Units. | 3.5 | All efforts should be made to remove colour and unpleasant odour as far as practicable |
| 2. | Odour | IS 3025 (Part5)-1983, Reaff 2006 | | Agreeable | |
| 3. | Total suspended Solids | 2540D APHA 22nd Edn.. 2012 | mg/L | 9.5 | 100 |
| 4. | pH | IS:3025:(Pt 11):1983 (Reaff 2006) | | 7.8 | 6.0-8.5 |
| 5. | Temperature | IS 3025 (Pt 9):1983 (Reaff:2006) | °C | 30.0 | Shall not exceed 5 degree Centigrade above the receiving water temperature |
| 6. | Oil & Grease | IS 3025,4(Pt 39):2000 (Reaff 2009) | mg/L | BDL(DL 1) | 5 |
| 7. | Total Residual Chlorine as Cl ₂ | IS:3025 (Pt26)1986 (Reaff 2009) | mg/L | BDL (DL 0.1) | 1 |
| 8. | Ammonical Nitrogen as N | IS 3025 Part (34)1988 | mg/L | 9.7 | 50 |
| 9. | Total Kjeldhal Nitrogen as N | IS 3025 Part (34)1988 | mg/L | 17.3 | 100 |
| 10. | Free Ammonia as NH ₃ | IS:3025 (Part34)1998 Reaff. 2003 | mg/L | BDL(DL 0.02) | 5 |
| 11. | BOD, 3 days @ 27°C as O ₂ | IS:3025 (Pt 44)1993 (Reaff 2009) | mg/L | 10.6 | 30 |
| 12. | COD as O ₂ | IS 3025 Part (58)2006 | mg/L | 56.0 | 125 |
| 13. | Lead as Pb | IS:3025 (Pt 47)1994 (Reaff 2009) | mg/L | BDL(DL 0.1) | 0.1 |
| 14. | Chromium (Hexavalent) as Cr ⁶⁺ | IS 3025 Part (52):2003 | mg/L | BDL(DL 0.01) | 0.1 |
| 15. | Total Chromium as Cr | IS 3025(Pt52):2003 (Reaff 2009) | mg/L | BDL(DL 0.01) | 2.0 |
| 16. | Copper as Cu | IS:3025:5,(Pt 42)1992 (Reaff 2009) | mg/L | BDL(DL 0.05) | 1.0 |
| 17. | Zinc as Zn | IS:3025 (Part49)1994 (Reaff 2009) | mg/L | BDL(DL 0.1) | 5.0 |

Prepared by

Checked by



1. The report in full or part shall not be used for any promotional or publicly purpose without written consent by HECS organization. 2. Samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss / damage caused by use or misuse of test report after invoicing or issue of test report. 5. The test results relate only to the test items. 6. # not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-46, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42986556 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
 ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: ETP EFFLUENT MONITORING (ETP EM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Guard Pond Pump Discharge (ETP Effluent) |
| Date of Sampling | 14.10.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 03.11.2017 |
| Report No | HECS/W/015/031117 |

RESULTS

| No. | Parameters monitored | Test method followed | Units | Results | Permissible Limit |
|-----|--|-----------------------------------|-------|---------------------------|--|
| 18. | Nickel as Ni | IS:3025 (Part54)2003 (Reaff 2009) | mg/L | BDL(DL 0.05) | 1.0 |
| 19. | Fluoride as F- | IS 3025 part (60):2008 | mg/L | BDL(DL 0.2) | 1.0 |
| 20. | Sulphide as S ²⁻ | IS:3025 (Pt 29)1986 (Reaff 2009) | mg/L | BDL(DL 0.04) | 2.0 |
| 21. | Particle Size of Suspended solids | APHA 22nd Edition | | Passed through 850 micron | 850 micron |
| 22. | Arsenic as As | IS:3025 (Part37)1988(Reaff 2009) | mg/L | BDL(DL 0.005) | 0.2 |
| 23. | Mercury as Hg | IS:3025 (Part48)1994 RA 1999 | mg/L | BDL(DL 0.001) | 0.01 |
| 24. | Cadmium as Cd | IS:3025 (Part41)1991 | mg/L | BDL(DL 0.01) | 0.1 |
| 25. | Selenium as Se | IS:3025 (Part56)2003 | mg/L | BDL(DL 0.005) | 0.05 |
| 26. | Cyanide as CN | IS:3025 (Part27)1986 Reaff. 2009 | mg/L | BDL(DL 0.01) | 0.2 |
| 27. | Phenolic Compounds as C ₆ H ₅ OH | IS 3025 Part (43)1992,RA 2009 | mg/L | BDL(DL 0.001) | 0.35 |
| 28. | Total Iron as Fe | IS 3025(Pt 53):2003(Reaff 2009) | mg/L | 0.58 | 3 |
| 29. | Manganese | IS:3025:(Pt-59):2006 | mg/L | BDL(DL 0.01) | 2 |
| 30. | Total Phosphorous as P | IS 3025(Pt 31):1988(Reaff 2009) | mg/L | BDL(DL 0.01) | 3 |
| 31. | Nitrate | IS 3025 (Pt 34):1988 (Reaff 2009) | mg/L | BDL(DL 1) | 20 |
| 32. | Vanadium as V | IS:3025 (Part56)2003 | mg/L | BDL(DL 0.01) | 0.1 |
| 33. | Benzo(a)pyrene | USEPA 8270C | mg/L | BDL(DL 0.0001) | 0.2 |
| 34. | Benzene | USEPA 8270C | mg/L | BDL(DL 0.0001) | 0.1 |
| 35. | Bioassay Test | IS 6582(Part 2):2001 | Tf | 9:1 | 90% survival of fish after 96 hrs in 100% effluent |


Note:-BDL - Below Detection Limit; D.L- Detection Limit; mg/L - Milligrams per liter

CONCLUSION: ETP OUTLET EFFLUENT WATER AS ABOVE PARAMETERS ARE WITHIN STANDARDS

End of Report

Prepared by

Checked by



Authorized Signatory

1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss / damage caused by use or misuse of test report after involving or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.

Form-1 (Rule 4)
Returns Regarding Water Consumed during the Month of October, 2017

| Name and address of the Consumer | Purpose for which water consumed | Reading at the beginning of the first day of the calendar month under report | Reading at the end of the last day of the calendar month under report | Quantity of Water Consumed In Kilo Liters | If the meter was out of order, the monthly average consumption of water for the previous 3 months of the working period | Quantity of water qualifying for rebate according to the assessee | Remarks |
|---|---|--|---|---|---|---|---------|
| | Industrial cooling, spraying in mine pits or boiler feed | | | | | | |
| | Cooling Water | 0 | | 88330 | 88330 | | |
| | Boiler Feed Water | 0 | | 75641 | 75641 | | |
| M/s ONGC Mangalore Petrochemicals Limited, Mangalore Special Economic Zone, Perrmude, Mangalore -574 509 | Fire Water | 0 | | 28596 | 28596 | | |
| | Domestic purpose | | | | | | |
| | Drinking Water & Sanitation | 0 | | 3989 | 3989 | | |
| | Processing whereby water gets polluted and the pollutants are easily bio-degradable | | | | | | |
| | Service Water | | | 5381 | 5381 | | |
| | Total Consumption | | | 199937 | 199937 | | |

ANNEXURE-D

Signature of the Consumer

Name

Address:

Sh. Paprakash, Manager(Env)

M/s ONGC Mangalore Petrochemicals Limited, Mangalore Special Economic Zone, Perrmude, Mangalore -574 509

ANNEXURE - F

ONGC Mangalore Petrochemicals Limited

Production Details for October, 2017

Net Naptha Processed – 1,21,058 MT

| Sl. No. | Name of the Product | Quantity, MT |
|---------|----------------------|--------------|
| 1 | Paraxylene (Product) | 65,769 |
| 2 | Benzene (Co product) | 16,330 |

ओएनजीसी मंगलूर पेट्रोकेमिकल्स लिमिटेड
(मंगलूर रिफाइनरी एण्ड पेट्रोकेमिकल्स लिमिटेड की सहायक कंपनी)
ONGC Mangalore Petrochemicals Limited

(A Subsidiary of Mangalore Refinery and Petrochemicals Ltd.)
एमएसईज़ेड, पेर्मुदे, मंगलूर MSEZ, Permude, Mangaluru - 574 509 CIN: U40107KA2006PLC041258
दूरभाष Landline:- 0824-2872000, फैक्स: 0824-2872005, Website: www.ompl.co.in

REF: OMPL/PCB/SP/2017-18/

Date: 20/12/2017

To:
The Environmental Officer
Regional Office
KSPCB
Baikampady, Mangalore-11

Dear Sir,

Sub: Submission of Environmental Monitoring Report for the Month of November 2017, Production Report for November 2017 & Returns Regarding Water Consumed for the Month of November, 2017

Ref: KSPCB Combined Consent Order No. AW-301949 dated 27th January, 2017

With respect to the above subject; we are herewith submitting the following Environmental Monitoring Reports, Production Reports & Returns Regarding Water Consumed in the Month of November 2017 respectively, enclosed herewith.

1. Ambient Air Quality Monitoring at 5 different locations in and around OMPL, enclosed as Annexure- A
2. Water Analysis Reports at 9 different locations in and around OMPL, as Annexure-B
3. Noise Level Monitoring Report at OMPL, as Annexure-C
4. Treated Effluent Analysis Report -D
5. Stack Monitoring Report as Annexure-E
6. SO2 Report as Annexure- F
7. Returns Regarding Water Consumed, for the Month of November 2017, as Annexure-G
8. Production Report as Annexure-H

Thanking You,

Shri S. Prakash
Manager (Env)

CC: Member Secretary, KSPCB, Bangalore

CC: Head (Technical), MSEZ

CC: CEO, OMPL for info

CC: COO, OMPL for info

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.

Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.

Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

ANNEXURE - A



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | Permude Village |
| Report Date | 01.12.2017 |
| Report No: | HECS/AA/004/011217 |

CONSOLIDATED TEST RESULTS: NOVEMBER 2017

| NOVEMBER '17 - Week | | 45-Week | 46-Week | | 47-Week | | 48-Week | | 49-Week | | Average Value |
|--|-------|----------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|
| Parameters | NAAQS | 02.11.17 | 06.11.17 | 09.11.17 | 13.11.17 | 16.11.17 | 20.11.17 | 23.11.17 | 27.11.17 | 30.11.17 | |
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60 | 18.3 | 18.0 | 17.6 | 18.4 | 17.5 | 18.1 | 17.8 | 18.5 | 18.2 | 18.04 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 50.3 | 49.8 | 49.5 | 50.6 | 49.4 | 50.1 | 49.7 | 50.7 | 50.2 | 50.03 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.4 | 3.3 | 3.1 | 3.5 | 3.2 | 3.3 | 3.2 | 3.5 | 3.4 | 3.32 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.3 | 3.2 | 3.1 | 3.4 | 3.1 | 3.3 | 3.1 | 3.4 | 3.3 | 3.24 |
| CO (mg/m^3) | 2.0 | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100 | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400 | BDL | BDL | BDL | BDL | BDL | 8DL | BDL | BDL | BDL | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1.0 | BDL |
| As (ng/m^3) | 6.0 | BDL |
| Ni (ng/m^3) | 20 | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 05 | BDL |
| B(α)P (ng/m^3) | 01 | BDL |

Note: BDL =Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂- Sulphur dioxide; NO₂ - Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³);O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$);NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$);As-Arsenic (DL 0.1 ng/m³);Ni-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(α)P- Benzo - α -pyrene (DL0.1 ng/m³); ng/m³: nanogram per cubic meter; $\mu\text{g}/\text{m}^3$ - microgram per cubic meter

CONCLUSION: All the parameters meet the NAAQ Standards

*****End of Report *****

Sampled by

Prepared by

Checked by

Authorized Signatory



1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not stored by HECS unless otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances HECS accepts any liability or loss/damage caused by use or misuse of test report after involving or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd. |
| Sampling Location | Tenka Ekkar |
| Report Date | 01.12.2017 |
| Report No | HECS/AA/003/011217 |

CONSOLIDATED TEST RESULTS: NOVEMBER 2017

| NOVEMBER '17 - Week | | 45-Week | 46-Week | | 47-Week | | 48-Week | | 49-Week | | Average Value |
|--|-------|----------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|
| Parameters | NAAQS | 02.11.17 | 06.11.17 | 09.11.17 | 13.11.17 | 16.11.17 | 20.11.17 | 23.11.17 | 27.11.17 | 30.11.17 | |
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60 | 18.2 | 18.9 | 18.0 | 18.3 | 17.9 | 18.8 | 18.1 | 17.7 | 18.6 | 18.28 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 50.8 | 51.2 | 50.4 | 50.9 | 50.2 | 51.1 | 50.5 | 50.1 | 51.0 | 50.69 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.5 | 3.6 | 3.4 | 3.5 | 3.4 | 3.6 | 3.4 | 3.3 | 3.6 | 3.48 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.7 | 3.9 | 3.6 | 3.7 | 3.6 | 3.9 | 3.7 | 3.6 | 3.8 | 3.72 |
| CO (mg/m^3) | 2.0 | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100 | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400 | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1.0 | BDL |
| As (ng/m^3) | 6.0 | BDL |
| NI (ng/m^3) | 20 | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 05 | BDL |
| B(α)P (ng/m^3) | 01 | BDL |

Note: BDL =Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂-Sulphur dioxide; NO₂ - Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³);O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$);NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb;Lead (DL 0.05 $\mu\text{g}/\text{m}^3$);As-Arsenic (DL 0.1 $\mu\text{g}/\text{m}^3$);Ni-Nickel (DL 0.5 $\mu\text{g}/\text{m}^3$); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(α)P- Benzo - α -pyrene (DL 0.1 ng/m^3); ng/m³: nanogram per cubic meter; $\mu\text{g}/\text{m}^3$ - microgram per cubic meter

CONCLUSION: All the parameters meet the NAAQ Standards

*****End of Report *****


Sampled by


Prepared by


Checked by


Authorized Signature



1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not stored by HECS unless otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss / damage caused by use or misuse of test report after involving or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600083.
Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | OMPL - East Side |
| Report Date | 01.12.2017 |
| Report No | HECS/AA/001/011217 |

CONSOLIDATED TEST RESULTS: NOVEMBER 2017

| NOVEMBER '17 - Week | | 45-Week | 46-Week | | 47-Week | | 48-Week | | 49-Week | | Average Value |
|--|-------|----------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|
| Parameters | NAAQS | 02.11.17 | 06.11.17 | 09.11.17 | 13.11.17 | 16.11.17 | 20.11.17 | 23.11.17 | 27.11.17 | 30.11.17 | |
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60 | 19.0 | 18.6 | 18.8 | 19.3 | 18.3 | 18.8 | 18.4 | 18.9 | 19.2 | 18.81 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 49.7 | 48.9 | 49.5 | 50.2 | 48.2 | 49.6 | 48.6 | 49.7 | 50.0 | 49.38 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 4.1 | 3.4 | 3.8 | 4.4 | 3.3 | 3.5 | 3.3 | 4.0 | 4.3 | 3.79 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 4.2 | 3.9 | 4.0 | 4.3 | 3.9 | 4.0 | 4.0 | 4.1 | 4.3 | 4.08 |
| CO (mg/m^3) | 2.0 | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100 | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400 | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1.0 | BDL |
| As (ng/m^3) | 6.0 | BDL |
| NI (ng/m^3) | 20 | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 0.5 | BDL |
| B(a)P (ng/m^3) | 0.1 | BDL |

Note: . BDL=Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂- Sulphur dioxide; NO₂ - Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³);O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$);NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$);Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$);As-Arsenic (DL 0.1 ng/m³);Ni-Nickel (DL 0.5 ng/m³);Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(a)P- Benzo - α -pyrene (DL 0.1 ng/m³); ng/m³: nanogram per cubic meter; $\mu\text{g}/\text{m}^3$ - microgram per cubic meter

CONCLUSION: All the parameters meet the NAAQ Standards

*****End of Report *****


Sampled by

Prepared by

Checked by

Authorized Signatory CHENNAI
600 083

- The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization.
- Samples are not drawn by HECS unless or otherwise mentioned.
- Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report.
- Under no circumstances lab accepts any liability or loss / damage caused by use or misuse of test report after issuing or issue of test report.
- The test results relate only to the test items.
- Not under scope of accreditation.



Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600083.
 Ph: 42885555 Fax: 42885500 E-mail: lab@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | Shantigudda |
| Report Date | 01.12.2017 |
| Report No | HECS/AA/002/011217 |

| NOVEMBER '17 - Week | | 45-Week | | 46-Week | | 47-Week | | 48-Week | | 49-Week | | Average Value |
|--|-------|----------|----------|----------|----------|----------|----------|----------|----------|----------|-------|---------------|
| Parameters | NAAQS | 02.11.17 | 06.11.17 | 09.11.17 | 13.11.17 | 16.11.17 | 20.11.17 | 23.11.17 | 27.11.17 | 30.11.17 | | |
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60 | 20.1 | 22.6 | 20.3 | 21.4 | 19.9 | 20.4 | 22.3 | 24.1 | 21.8 | 21.43 | |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 51.7 | 51.4 | 52.0 | 51.6 | 51.2 | 51.9 | 50.9 | 51.3 | 52.1 | 51.57 | |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.8 | 3.7 | 4.0 | 3.8 | 3.7 | 3.9 | 3.7 | 3.8 | 4.0 | 3.82 | |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.7 | 3.4 | 3.6 | 3.5 | 3.4 | 3.5 | 3.3 | 3.4 | 3.7 | 3.50 | |
| CO (mg/m^3) | 2.0 | BDL | BDL | |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100 | BDL | BDL | |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400 | BDL | BDL | |
| Pb ($\mu\text{g}/\text{m}^3$) | 1.0 | BDL | BDL | |
| As (ng/m^3) | 6.0 | BDL | BDL | |
| Ni (ng/m^3) | 20 | BDL | BDL | |
| Benzene ($\mu\text{g}/\text{m}^3$) | 05 | BDL | BDL | |
| B(a)P (ng/m^3) | 01 | BDL | BDL | |

Note: BDL = Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron, PM₁₀-Particulate matter size less than 10 Micron; SO₂ Sulphur di-oxide; NO₂ - Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³); O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$); NH₃ Ammonia (DL 5 $\mu\text{g}/\text{m}^3$); Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$); As-Arsenic (DL 0.1 ng/m^3); Ni-Nickel (DL 0.5 ng/m^3); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(a)P- Benzo -α-pyrene (DL 0.1 ng/m^3); ng/m³: nanogram per cubic meter; $\mu\text{g}/\text{m}^3$ - microgram per cubic meter

CONCLUSION: All the parameters meet the NAAQ Standards

*****End of Report *****

Kishore
Sampled by

Prepared by

Checked by

Gopal
Authorized Signatory
CHEMIST
003/003

1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 16 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss/damage caused by use or misuse of test report after involving or issue of test report. 5. The test results relate only to the test sample. 6. Not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083;
Ph: 42985555 Fax: 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: AMBIENT AIR MONITORING (AAQ)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Ambient Air Quality Monitoring (AAQ) |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | OMPL - West Side |
| Report Date | 01.12.2017 |
| Report No | HECS/AA/005/011217 |

CONSOLIDATED TEST RESULTS: NOVEMBER 2017

| NOVEMBER '17 - Week | | 45-Week | 46-Week | | 47-Week | | 48-Week | | 49-Week | | Average Value |
|--|-------|----------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|
| Parameters | NAAQS | 02.11.17 | 06.11.17 | 09.11.17 | 13.11.17 | 16.11.17 | 20.11.17 | 23.11.17 | 27.11.17 | 30.11.17 | |
| PM _{2.5} ($\mu\text{g}/\text{m}^3$) | 60 | 18.7 | 18.3 | 17.9 | 18.9 | 18.4 | 17.8 | 18.1 | 18.8 | 18.5 | 18.38 |
| PM ₁₀ ($\mu\text{g}/\text{m}^3$) | 100 | 48.5 | 48.2 | 47.8 | 48.8 | 48.3 | 47.5 | 48.0 | 48.7 | 48.4 | 48.24 |
| SO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.4 | 3.2 | 3.1 | 3.4 | 3.2 | 3.1 | 3.2 | 3.3 | 3.3 | 3.24 |
| NO ₂ ($\mu\text{g}/\text{m}^3$) | 80 | 3.2 | 3.1 | 3.0 | 3.2 | 3.1 | 3.0 | 3.0 | 3.2 | 3.1 | 3.10 |
| CO (mg/m^3) | 2.0 | BDL |
| O ₃ ($\mu\text{g}/\text{m}^3$) | 100 | BDL |
| NH ₃ ($\mu\text{g}/\text{m}^3$) | 400 | BDL |
| Pb ($\mu\text{g}/\text{m}^3$) | 1.0 | BDL |
| As (ng/m^3) | 6.0 | BDL |
| I _i (ng/m^3) | 20 | BDL |
| Benzene ($\mu\text{g}/\text{m}^3$) | 05 | BDL |
| B(a)P (ng/m^3) | 01 | BDL |

Note: BDL = Below detection limit; DL - Detection Limit; PM_{2.5}-Particulate matter size less than 2.5 Micron; PM₁₀-Particulate matter size less than 10 Micron; SO₂-Sulphur dioxide; NO₂- Nitrogen-di-oxide; CO - Carbon Mono Oxide(DL 0.1 mg/m³);O₃-Ozone(DL 10 $\mu\text{g}/\text{m}^3$);NH₃-Ammonia (DL 5 $\mu\text{g}/\text{m}^3$);Pb-Lead (DL 0.05 $\mu\text{g}/\text{m}^3$);As-Arsenic (DL 0.1 ng/m³);Ni-Nickel (DL 0.5 ng/m³); Benzene-(DL 1 $\mu\text{g}/\text{m}^3$); B(a)P- Benzo -a-pyrene (DL 0.1 ng/m³); ng/m³; nanogram per cubic meter; $\mu\text{g}/\text{m}^3$ - microgram per cubic meter

CONCLUSION: All the parameters meet the NAAQ Standards

*****End of Report *****

Sampled by

Prepared by

Checked by

Authorized Signatory



1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are collected by HECS organization or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss/damage caused by use or misuse of test report after involving or issue of test report. 5. The test results relate only to the test items. 6. Lab is under scope of accreditation.

ANNEXURE -B

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985556 Fax: 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
 ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: GROUND WATER MONITORING (GWM)

| | |
|-------------------------|---|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | GW1 - Ground Water collected from Narayana Guru Community Hall, Permude |
| Date of Sampling | 07.11.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.12.2017 |
| Report No | HECS/W/001/011217 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.79 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 1.5 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 39.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 8.9 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 91.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 9.2 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 5.3 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 142.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 11.0 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | 0.38 | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 8.5 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff.2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L - Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
 MPN- Most Probable Number; mL-Milliliter


CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

[Signature]
Prepared by

[Signature]
Checked by

[Signature]
Authorized Signatory



1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Results are not drawn by HECS unless otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss/damage caused by use or misuse of test report after invoicing or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax: 42985500 E-mail: labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: GROUND WATER MONITORING (GWM)

| | |
|-------------------------|---|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore – 574509 |
| Sample Description | GW2 - Ground Water collected from Gagtel Labor Colony |
| Date of Sampling | 07.11.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.12.2017 |
| Report No | HECS/W/002/011217 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 6.76 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 1.18 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 42.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 8.5 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 34.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 12.7 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 5.6 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 90.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 6.8 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 1.46 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coli form Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
MPN- Most Probable Number; mL-Milliliter


CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Prepared by

Checked by

Authorized Signatory



1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. In unusual circumstances lab accepts any liability or loss / damage caused by use or misuse of test report after invoicing or issue of test report. 4. The test results relate only to the test items. 5. Is not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.

Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.

Ph: 42995555 Fax : 42985600 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: GROUND WATER MONITORING (GWM)

| | |
|-------------------------|---|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore – 574509 |
| Sample Description | GW3- Ground Water collected from L&T New Labor Colony |
| Date of Sampling | 07.11.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.12.2017 |
| Report No | HECS/W/003/011217 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.77 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 1.21 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 6.6 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 13.7 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 62.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 16.8 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 7.5 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 149.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 9.2 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 1.21 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;

MPN- Most Probable Number; mL-Milliliter

CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Prepared by

Checked by

Authorized Signatory

1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not stored by HECS unless otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss / damage caused by use or misuse of test report after invoicing or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.



Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL In the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: GROUND WATER MONITORING (GWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | GW4-Ground Water collected Near OMPL – ETP |
| Date of Sampling | 07.11.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.12.2017 |
| Report No | HECS/W/004/011217 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.65 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | BDL (DL 0.1) | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 63.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 13.0 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 48.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 18.3 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 5.5 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 161.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 8.09 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 2.45 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
 MPN- Most Probable Number; mL-Milliliter


CONCLUSION: GROUND WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

[Signature]
Prepared by

[Signature]
Checked by

Authorized Signatory



1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Services are provided by HECS unless otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss / damage caused by use or misuse of test report after invoicing or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax: 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL In the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: OPEN WELL WATER MONITORING (OWWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore – 574509 |
| Sample Description | OW1- Open Water collected from Tenka Ekkar |
| Date of Sampling | 07.11.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.12.2017 |
| Report No | HECS/W/005/011217 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|-------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.62 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 2.69 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 55.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 9.1 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 49.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 9.4 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 5.2 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 78.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 6.01 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 2.12 | 45 max |
| 15. | Iron as Fe | IS3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
 MPN- Most Probable Number; mL-Milliliter


CONCLUSION: OPENWELL WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Shashi
Prepared by

Joshi
Checked by

Authorized Signatory



1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not owned by HECS unless otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accept any liability or loss/damage caused by use or misuse of test report after involving or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.



Certificate No. T-3180

TEST REPORT: OPEN WELL WATER MONITORING (OWWM)

| | |
|-------------------------|---|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | OW2 - Open Water collected from Shantigudda Village |
| Date of Sampling | 07.11.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.12.2017 |
| Report No | HECS/W/006/011217 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.64 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | 2.73 | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | BDL (DL 0.1) | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 51.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 8.85 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 63.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 12.4 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 5.5 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 81.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 6.3 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 2.23 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
 MPN- Most Probable Number; mL-Milliliter


CONCLUSION: OPENWELL WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Shaila
Prepared by

J. J. Jose
Checked by

Law
Authorized Signatory





Laboratory Services Division

Accredited by NABL in the fields of Chemical
 ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: OPEN WELL WATER MONITORING (OWWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | OW3 - Open Water collected from Permude Village |
| Date of Sampling | 07.11.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.12.2017 |
| Report No | HECS/W/007/011217 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.35 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 2.74 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 45.0 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 8.0 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 24.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 11.0 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 4.6 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 53.0 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 4.8 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 4.0 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | BDL (DL 0.02) | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |


Note:- BDL - Below Detection Limit; D.L.- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per Liter;
 MPN- Most Probable Number; mL-Milliliter

CONCLUSION: OPENWELL WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

Chaitanya
 Prepared by

End of Report
Chaitanya
 Checked by

Authorized Signatory

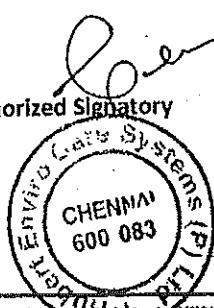

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 576011.

Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.

Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

**Laboratory Services Division**

Accredited by NABL in the fields of Chemical

ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: SURFACE WATER MONITORING (SWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | SW1 - Surface Water collected Near OMPL - Flare Area |
| Date of Sampling | 07.11.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.12.2017 |
| Report No | HECS/W/008/011217 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.51 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 2.17 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 175 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 52.0 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 118.0 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 15.7 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 9.2 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 453 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 68.6 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | 0.47 | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 2.50 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | 0.26 | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per liter; NA-Not Available


CONCLUSION: SURFACE WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Prepared by

Checked by

Authorized Signatory



1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples sent are owned by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss/damage caused by use or misuse of test report after invoicing or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.

Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.

Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

**Laboratory Services Division**Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: SURFACE WATER MONITORING (SWM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore – 574509 |
| Sample Description | SW2 - Surface Water collected Near OMPL - Near Central Warehouse |
| Date of Sampling | 07.11.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.12.2017 |
| Report No | HECS/W/009/011217 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | As per IS10500:2012 Permissible Limit |
|-------|---------------------------------------|--------------------------|------------|---------------|---------------------------------------|
| 1. | pH (at 25°C) | IS 3025 (Part-11) 1983 | - | 7.24 | 6.5-8.5 |
| 2. | Colour | IS 3025 (Part-4) 1983 | Hazen unit | BDL (DL 1) | 15 |
| 3. | Turbidity | IS 3025 (Part-10) 1984 | NTU | 4.5 | 5 max |
| 4. | Odour | IS 3025 (Part-5) 1983 | - | Agreeable | Agreeable |
| 5. | Taste | IS 3025 (Part-8) 1984 | - | Agreeable | Agreeable |
| 6. | Total Hardness as CaCO ₃ | IS 3025 (Part-21) 1983 | mg/L | 83 | 600 max |
| 7. | Calcium as Ca | IS 3025 (Part-40) 1991 | mg/L | 13.7 | 200 max |
| 8. | Total Alkalinity as CaCO ₃ | IS 3025 (Part-23) 1986 | mg/L | 35 | 200 max |
| 9. | Chloride as Cl | IS 3025 (Part-32) 1988 | mg/L | 70 | 1000 max |
| 10. | Magnesium as Mg | IS 3025 (Part-46) 1994 | mg/L | 8.1 | 100 max |
| 11. | Total Dissolved Solids | IS 3025 (Part-16) 1984 | mg/L | 168 | 2000 max |
| 12. | Sulphate as SO ₄ | IS 3025 (Part-24) 1986 | mg/L | 57 | 400 max |
| 13. | Fluoride | IS 3025 (Part-60) 2008 | mg/L | BDL (DL 0.2) | 1.5 max |
| 14. | Nitrate as NO ₃ | ASTM (Part-31) 1978 | mg/L | 4.24 | 45 max |
| 15. | Iron as Fe | IS 3025 (Part-53) 2003 | mg/L | 0.25 | 0.3 max |
| 16. | Hexavalent Chromium Cr ⁶⁺ | IS 3025 (Part-52) 2003 | mg/L | BDL (DL 0.01) | 0.05 max |
| 17. | Total coliform Bacteria | IS 1622:1981(R.aff 2009) | MPN/100mL | Absent | Not Detectable |
| 18. | Escherichia coli | IS 1622:1981(R.aff 2009) | Per 100mL | Absent | Not Detectable |

Note:- BDL - Below Detection Limit; D.L- Detection Limit; NTU-Nephelometric Turbidity Unit; mg/L - Milligrams per liter

CONCLUSION: SURFACE WATER AS ABOVE PARAMETERS MEETS DRINKING WATER GUIDELINES OF IS: 10500:2012

End of Report

Prepared by

Checked by

Authorized Signatory


ANNEXURE - C

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax: 42986500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: NOISE MONITORING

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Noise Monitoring |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Sampling Location | OMPL – North, South, East and West sides |
| Sampling Date | 07.11.2017 |
| Report Date | 01.12.2017 |
| Report No. | HECS/N/001/011217 |

NOISE MONITORING: NOVEMBER 2017

| S.No. | Sampling Location | MoEF requirements in dB | | Avg. Noise level observed in dB | |
|-------|-------------------|-------------------------|-------|---------------------------------|-------|
| | | Day | Night | Day | Night |
| 1. | OMPL-North | | | 67.5 | 65.4 |
| 2. | OMPL-South | | | 66.3 | 63.7 |
| 3. | OMPL-East | 75 | 70 | 68.8 | 66.1 |
| 4. | OMPL-West | | | 66.9 | 64.8 |

Note: dB: Decibel

CONCLUSION: All the parameters meet MoEF Standards

*****End of Report*****

Sampled by

Prepared by

Checked by


Authorized Signatory



Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 576011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

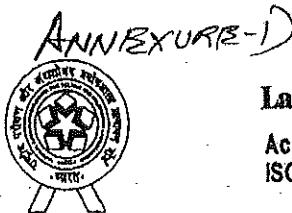

Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: ETP EFFULENT MONITORING (ETP EM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Guard Pond Pump Discharge (ETP Effluent) |
| Date of Sampling | 07.11.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.12.2017 |
| Report No | HECS/W/011/011217 |


RESULTS

| No. | Parameters monitored | Test method followed | Units | Results | Permissible Limit |
|-----|--|------------------------------------|-------------|--------------|--|
| 1. | Color | IS:3025:(Pt 4)1983 (Reaff 2006) | Hazen Units | 3.3 | All efforts should be made to remove colour and unpleasant odour as far as practicable |
| 2. | Odour | IS 3025 (Part5)-1983, Reaff 2006 | - | Agreeable | |
| 3. | Total suspended Solids | 2540D APHA 22nd Edn., 2012 | mg/L | 9.9 | 100 |
| 4. | pH | IS:3025:(Pt 11):1983 (Reaff 2006) | - | 6.94 | 6.0-8.5 |
| 5. | Temperature | IS 3025 (Pt 9):1983 (Reaff:2006) | °C | 28.0 | Shall not exceed 5 degree Centigrade above the receiving water temperature |
| 6. | Oil & Grease | IS 3025,4(Pt 39):2000 (Reaff 2009) | mg/L | BDL(DL 1) | 5 |
| | Total Residual Chlorine as Cl ₂ | IS:3025 (Pt26)1986 (Reaff 2009) | mg/L | BDL (DL 0.1) | 1 |
| 8. | Ammonical Nitrogen as N | IS 3025 Part (34)1988 | mg/L | 9.3 | 50 |
| 9. | Total Kjeldhal Nitrogen as N | IS 3025 Part (34)1988 | mg/L | 32.0 | 100 |
| 10. | Free Ammonia as NH ₃ | IS:3025 (Part34)1998 Reaff. 2003 | mg/L | BDL(DL 0.02) | 5 |
| 11. | BOD, 3 days @ 27°C as O ₂ | IS:3025 (Pt 44)1993 (Reaff 2009) | mg/L | 10.3 | 30 |
| 12. | COD as O ₂ | IS 3025 Part (58)2006 | mg/L | 63.0 | 125 |
| 13. | Lead as Pb | IS:3025 (Pt 47)1994 (Reaff 2009) | mg/L | BDL(DL 0.1) | 0.1 |
| 14. | Chromium (Hexavalent) as Cr ⁶⁺ | IS 3025 Part (52):2003 | mg/L | BDL(DL 0.01) | 0.1 |
| 15. | Total Chromium as Cr | IS 3025(Pt52):2003 (Reaff 2009) | mg/L | BDL(DL 0.01) | 2.0 |
| 16. | Copper as Cu | IS:3025:5,(Pt 42)1992 (Reaff 2009) | mg/L | BDL(DL 0.05) | 1.0 |
| 17. | Zinc as Zn | IS:3025 (Part49)1994 (Reaff 2009) | mg/L | BDL(DL 0.1) | 5.0 |

Prepared by
Shankar

Checked by
[Signature]

Authorized Signatory
[Signature]



1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances can accept any liability or loss/damage caused by use or misuse of test report after Invoicing or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.



Certificate No. T-3180

TEST REPORT: ETP EFFULENT MONITORING (ETP EM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Guard Pond Pump Discharge (ETP Effluent) |
| Date of Sampling | 07.11.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.12.2017 |
| Report No | HECS/W/011/011217 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | Permissible Limit |
|-------|-----------------------------------|-----------------------------------|-------|---------------------------|--|
| 18. | Nickel as Ni | IS:3025 (Part54)2003 (Reaff 2009) | mg/L | BDL(DL 0.05) | 1.0 |
| 19. | Fluoride as F- | IS 3025 part (60):2008 | mg/L | BDL(DL 0.2) | 1.0 |
| 20. | Sulphide as S ²⁻ | IS:3025 (Pt 29)1986 (Reaff 2009) | mg/L | BDL(DL 0.04) | 2.0 |
| 21. | Particle Size of Suspended solids | APHA 22nd Edition | - | Passed through 850 micron | 850 micron |
| 22. | Arsenic as As | IS:3025 (Part37)1988(Reaff 2009) | mg/L | BDL(DL 0.005) | 0.2 |
| 23. | Mercury as Hg | IS:3025 (Part48)1994 RA 1999 | mg/L | BDL(DL 0.001) | 0.01 |
| 24. | Cadmium as Cd | IS:3025 (Part41)1991 | mg/L | BDL(DL 0.01) | 0.1 |
| 25. | Selenium as Se | IS:3025 (Part56)2003 | mg/L | BDL(DL 0.005) | 0.05 |
| 26. | Cyanide as CN | IS:3025 (Part27)1986 Reaff. 2009 | mg/L | BDL(DL 0.01) | 0.2 |
| 27. | Phenolic Compounds as C6H5OH | IS 3025 Part (43)1992,RA 2009 | mg/L | BDL(DL 0.001) | 0.35 |
| 28. | Total Iron as Fe | IS 3025(Pt 53):2003(Reaff 2009) | mg/L | 0.39 | 3 |
| 29. | Manganese | IS:3025:(Pt-59):2006 | mg/L | BDL(DL 0.01) | 2 |
| 30. | Total Phosphorous as P | IS 3025(Pt 31):1988(Reaff 2009) | mg/L | BDL(DL 0.01) | 3 |
| 31. | Nitrate | IS 3025 (Pt 34):1988 (Reaff 2009) | mg/L | BDL(DL 1) | 20 |
| 32. | Vanadium as V | IS:3025 (Part56)2003 | mg/L | BDL(DL 0.01) | 0.1 |
| 33. | Benz(a)pyrene | USEPA 8270C | mg/L | BDL(DL 0.0001) | 0.2 |
| 34. | Benzene | USEPA 8270C | mg/L | BDL(DL 0.0001) | 0.1 |
| 35. | Bioassay Test | IS 6582(Part 2):2001 | Tf | 9:1 | 90% survival of fish after 96 hrs in 100% effluent |

Note:-BDL - Below Detection Limit; D.L- Detection Limit; mg/L - Milligrams per liter


CONCLUSION: ETP OUTLET EFFULENT WATER AS ABOVE PARAMETERS ARE WITHIN STANDARDS

End of Report

Prepared by

Checked by

Authorized Signatory/



1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accept any liability or losses / damage caused by use or misuse of test report after Invoicing or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-46, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in

H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax : 42985500 E-mail: labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: ETP EFFLUENT MONITORING (ETP EM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Guard Pond Pump Discharge (ETP Effluent) |
| Date of Sampling | 24.11.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.12.2017 |
| Report No | HECS/W/015/011217 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | Permissible Limit |
|-------|--|------------------------------------|-------------|--------------|--|
| 1. | Color | IS:3025:(Pt 4)1983 (Reaff 2006) | Hazen Units | 3.2 | All efforts should be made to remove colour and unpleasant odour as far as practicable |
| 2. | Odour | IS 3025 (Part5)-1983, Reaff 2006 | - | Agreeable | |
| 3. | Total suspended Solids | 2540D APHA 22nd Edn.. 2012 | mg/L | 9.3 | 100 |
| 4. | pH | IS:3025:(Pt 11):1983 (Reaff 2006) | - | 7.6 | 6.0-8.5 |
| 5. | Temperature | IS 3025 (Pt 9):1983 (Reaff:2006) | °C | 29.0 | Shall not exceed 5 degree Centigrade above the receiving water temperature |
| 6. | Oil & Grease | IS 3025,4(Pt 39):2000 (Reaff 2009) | mg/L | BDL(DL 1) | 5 |
| 7. | Total Residual Chlorine as Cl ₂ | IS:3025 (Pt26)1986 (Reaff 2009) | mg/L | BDL (DL 0.1) | 1 |
| 8. | Ammonical Nitrogen as N | IS 3025 Part (34)1988 | mg/L | 9.4 | 50 |
| 9. | Total Kjeldhal Nitrogen as N | IS 3025 Part (34)1988 | mg/L | 17.0 | 100 |
| 10. | Free Ammonia as NH ₃ | IS:3025 (Part34)1998 Reaff. 2003 | mg/L | BDL(DL 0.02) | 5 |
| 11. | BOD, 3 days @ 27°C as O ₂ | IS:3025 (Pt 44)1993 (Reaff 2009) | mg/L | 10.4 | 30 |
| 12. | COD as O ₂ | IS 3025 Part (58)2006 | mg/L | 53.0 | 125 |
| 13. | Lead as Pb | IS:3025 (Pt 47)1994 (Reaff 2009) | mg/L | BDL(DL 0.1) | 0.1 |
| 14. | Chromium (Hexavalent) as Cr ⁶⁺ | IS 3025 Part (52):2003 | mg/L | BDL(DL 0.01) | 0.1 |
| 15. | Total Chromium as Cr | IS 3025(Pt52):2003 (Reaff 2009) | mg/L | BDL(DL 0.01) | 2.0 |
| 16. | Copper as Cu | IS:3025.5,(Pt 42)1992 (Reaff 2009) | mg/L | BDL(DL 0.05) | 1.0 |
| 17. | Zinc as Zn | IS:3025 (Part49)1994 (Reaff 2009) | mg/L | BDL(DL 0.1) | 5.0 |

[Signature]
Prepared by

[Signature]
Checked by

[Signature]
Authorized Signatory
CHENNAI
600 083

1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not drawn by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances shall accept any liability or loss/damage caused by use or misuse of test report after invoicing or issue of test report. 5. The test results relate only to the test items. 6. #not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.
 C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division
 Accredited by NABL in the fields of Chemical
 ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT: ETP EFFLUENT MONITORING (ETP EM)

| | |
|-------------------------|--|
| Name of the Industry | M/s. ONGC Mangalore Petrochemicals Limited (OMPL) |
| Address of the Industry | Mangalore SEZ, Premude Village, Mangalore - 574509 |
| Sample Description | Guard Pond Pump Discharge (ETP Effluent) |
| Date of Sampling | 24.11.2017 |
| Sample Collected by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.12.2017 |
| Report No | HECS/W/015/011217 |

RESULTS

| S.No. | Parameters monitored | Test method followed | Units | Results | Permissible Limit |
|-------|-----------------------------------|-----------------------------------|-------|---------------------------|--|
| 18. | Nickel as Ni | IS:3025 (Part54)2003 (Reaff 2009) | mg/L | BDL(DL 0.05) | 1.0 |
| 19. | Fluoride as F- | IS 3025 part (60):2008 | mg/L | BDL(DL 0.2) | 1.0 |
| 20. | Sulphide as S ²⁻ | IS:3025 (Pt 29)1986 (Reaff 2009) | mg/L | BDL(DL 0.04) | 2.0 |
| 21. | Particle Size of Suspended solids | APHA 22nd Edition | - | Passed through 850 micron | 850 micron |
| 22. | Arsenic as As | IS:3025 (Part37)1988(Reaff 2009) | mg/L | BDL(DL 0.005) | 0.2 |
| 23. | Mercury as Hg | IS:3025 (Part48)1994 RA 1999 | mg/L | BDL(DL 0.001) | 0.01 |
| 24. | Cadmium as Cd | IS:3025 (Part41)1991 | mg/L | BDL(DL 0.01) | 0.1 |
| 25. | Selenium as Se | IS:3025 (Part56)2003 | mg/L | BDL(DL 0.005) | 0.05 |
| 26. | Cyanide as CN | IS:3025 (Part27)1986 Reaff. 2009 | mg/L | BDL(DL 0.01) | 0.2 |
| 27. | Phenolic Compounds as C6H5OH | IS 3025 Part (43)1992, RA 2009 | mg/L | BDL(DL 0.001) | 0.35 |
| 28. | Total Iron as Fe | IS 3025(Pt 53):2003(Reaff 2009) | mg/L | 0.54 | 3 |
| 29. | Manganese | IS:3025:(Pt-59):2006 | mg/L | BDL(DL 0.01) | 2 |
| 30. | Total Phosphorous as P | IS 3025(Pt 31):1988(Reaff 2009) | mg/L | BDL(DL 0.01) | 3 |
| 31. | Nitrate | IS 3025 (Pt 34):1988 (Reaff 2009) | mg/L | BDL(DL 1) | 20 |
| 32. | Vanadium as V | IS:3025 (Part56)2003 | mg/L | BDL(DL 0.01) | 0.1 |
| 33. | Benzo(a)pyrene | USEPA 8270C | mg/L | BDL(DL 0.0001) | 0.2 |
| 34. | Benzene | USEPA 8270C | mg/L | BDL(DL 0.0001) | 0.1 |
| 35. | Bioassay Test | IS 6582(Part 2):2001 | Tf | 9:1 | 90% survival of fish after 96 hrs in 100% effluent |

Note:-BDL - Below Detection Limit; D:L- Detection Limit; mg/L - Milligrams per liter

CONCLUSION: ETP OUTLET EFFULENT WATER AS ABOVE PARAMETERS ARE WITHIN STANDARDS

End of Report

[Signature]
Prepared by

[Signature]
Checked by

[Signature]
Authorized Signatory

ENVIRONMENTAL
CHENNAI
600 083

1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not drawn by HECS unless otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab shall be liable or loss/damage caused by use or misuse of test report after issuing or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-46, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in

ANNEXURE - E



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT

TEST REPORT: STACK EMISSION MONITORING FOR THE MONTH OF NOVEMBER - 2017

Page No. 1 of 9

| | |
|-------------------------------|---|
| Name of the Industry | M/s ONGC Mangalore Petrochemicals Limited |
| Address of the Industry | Mangalore SEZ, Permude Village, Mangalore-574509, Karnataka, India. |
| Stack ID | NHT Charge heater |
| Sample Description | Manual Stack Emission Monitoring |
| Sampling Date | 15.11.2017 |
| Sample Receipt | 17.11.2017 |
| Equipment Used | Vayubodhan VSS1 |
| Method of Sampling & Analysis | IS 11255:1995 Methods for Measurement of Emission from Stationary Sources |
| Sample Drawn by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.12.2017 |
| Report No | HECS-OMPL/SEM/001/011217 |

| General Details | |
|--|---------|
| Ambient Temperature (°C) | 31 |
| Stack Diameter (m) | 1.94 |
| Stack Height (m) | 65 |
| Stack Temperature (°C) | 280 |
| Flue Gas Velocity (m/s) | 9.7 |
| Flue gas flow rate (Nm ³ /hr) | 56251.3 |

| Parameter monitored | Protocol | Results(mg/Nm ³) | Standard Norms(mg/Nm ³) |
|--------------------------------------|-----------------------|------------------------------|-------------------------------------|
| SPM | IS 11255(Part 1)-1985 | 4 | 5 |
| Sulphur Dioxide(SO ₂) | IS 11255(Part 3)-1985 | 46 | 50 |
| Oxides of Nitrogen(NO _x) | IS 11255(Part 7)-2005 | 90 | 250 |
| Carbon monoxide (CO) | IS 5182(Part 10)-1999 | BDL | 100 |

Note: mg/Nm³: milligram per normal cubic meter; SPM: Suspended Particulate Matter;
 m/s -- Meter per second; Nm³/hr -- Normal cubic meter per hour

Inference: - STACK EMISSIONS AS ABOVE PARAMETERS ARE WITHIN STANDARDS


K. Balaji
Sampled by

J. Balaji
Prepared by

Shalini
Verified by

R. Balaji
Authorized Signatory

1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Report is valid for 12 months unless otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss/damage caused by use or misuse of test report after invoicing or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.



Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT

TEST REPORT: STACK EMISSION MONITORING FOR THE MONTH OF NOVEMBER - 2017

Page No. 2 of 9

| | |
|-------------------------------|---|
| Name of the Industry | M/s ONGC Mangalore Petrochemicals Limited |
| Address of the Industry | Mangalore SEZ, Permude Village, Mangalore-574509, Karnataka, India. |
| Stack ID | Isomer Charge Heater |
| Sample Description | Manual Stack Emission Monitoring |
| Sampling Date | 14.11.2017 |
| Sample Receipt | 16.11.2017 |
| Equipment Used | Vayubodhan VSS1 |
| Method of Sampling & Analysis | IS 11255:1995 Methods for Measurement of Emission from Stationary Sources |
| Sample Drawn by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.12.2017 |
| Report No | HECS-OMPL/SEM/002/011217 |

| General Details | |
|--|---------|
| Ambient Temperature (°C) | 33- |
| Stack Diameter (m) | 2.3 |
| Stack Height (m) | 65 |
| Stack Temperature (°C) | 181 |
| Flue Gas Velocity (m/s) | 4.3 |
| Flue gas flow rate (Nm ³ /hr) | 41521.9 |

| Parameter monitored | Protocol | Results(mg/Nm ³) | Standard Norms(mg/Nm ³) |
|--------------------------------------|-----------------------|------------------------------|-------------------------------------|
| SPM | IS 11255(Part 1)-1985 | 3 | 5 |
| Sulphur Dioxide(SO ₂) | IS 11255(Part 3)-1985 | 37 | 50 |
| Oxides of Nitrogen(NO _x) | IS 11255(Part 7)-2005 | 64 | 250 |
| Carbon monoxide (CO) | IS 5182(Part 10)-1999 | BDL | 100 |

Note: mg/Nm³: milligram per normal cubic meter; SPM: Suspended Particulate Matter;
m/s – Meter per second; Nm³/hr – Normal cubic meter per hour

Inference: - STACK EMISSIONS AS ABOVE PARAMETERS ARE WITHIN STANDARDS

Sampled by

Prepared by

Verified by

Authorized Signatory



1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not stored by HECS unless otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss/damage caused by use or misuse of test report after involving or issue of test report. 5. The test results relate only to the test items. 6. #notunderstandable/uncertain.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
 ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT

TEST REPORT: STACK EMISSION MONITORING FOR THE MONTH OF NOVEMBER - 2017

Page No. 3 of 9

| | |
|-------------------------------|---|
| Name of the Industry | M/s ONGC Mangalore Petrochemicals Limited |
| Address of the Industry | Mangalore SEZ, Permude Village, Mangalore-574509, Karnataka, India. |
| Stack ID | CPP (GTG-HRSG) - 1 |
| Sample Description | Manual Stack Emission Monitoring |
| Sampling Date | 13.11.2017 |
| Sample Receipt | 15.11.2017 |
| Equipment Used | Vayubodhan VSS1 |
| Method of Sampling & Analysis | IS 11255:1995 Methods for Measurement of Emission from Stationary Sources |
| Sample Drawn by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.12.2017 |
| Report No | HECS-OMPL/SEM/003/011217 |

General Details

| | |
|--|----------|
| Ambient Temperature (°C) | 33 |
| Stack Diameter (m) | 2.8 |
| Stack Height (m) | 70 |
| Stack Temperature (°C) | 196 |
| Flue Gas Velocity (m/s) | 12.5 |
| Flue gas flow rate (Nm ³ /hr) | 200871.6 |


| Parameter monitored | Protocol | Results(mg/Nm ³) | Standard Norms(mg/Nm ³) |
|--------------------------------------|-----------------------|------------------------------|-------------------------------------|
| SPM | IS 11255(Part 1)-1985 | 30 | 50 |
| Sulphur Dioxide(SO ₂) | IS 11255(Part 3)-1985 | 203 | 850 |
| Oxides of Nitrogen(NO _x) | IS 11255(Part 7)-2005 | 322 | 350 |
| Carbon monoxide (CO) | IS 5182(Part 10)-1999 | BDL | 150 |

Note: mg/Nm³: milligram per normal cubic meter; SPM: Suspended Particulate Matter;
 m/s – Meter per second; Nm³/hr – Normal cubic meter per hour

Inference: - STACK EMISSIONS AS ABOVE PARAMETERS ARE WITHIN STANDARDS

Shashi

Lav



Hubert Enviro Care Systems (P) Ltd.

C-46, Industrial Estate, Baikampady, Mangalore, Karnataka - 575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT

TEST REPORT: STACK EMISSION MONITORING FOR THE MONTH OF NOVEMBER - 2017

Page No. 4 of 9

| | |
|-------------------------------|---|
| Name of the Industry | M/s ONGC Mangalore Petrochemicals Limited |
| Address of the Industry | Mangalore SEZ, Permude Village, Mangalore-574509, Karnataka, India. |
| Stack ID | Plat former Unit Charge Heater |
| Sample Description | Manual Stack Emission Monitoring |
| Sampling Date | 16.11.2017 |
| Sample Receipt | 18.11.2017 |
| Equipment Used | Vayubodhan VSS1 |
| Method of Sampling & Analysis | IS 11255:1995 Methods for Measurement of Emission from Stationary Sources |
| Sample Drawn by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.12.2017 |
| Report No | HECS-OMPL/SEM/004/011217 |

General Details

| | |
|--|----------|
| Ambient Temperature (°C) | 36 |
| Stack Diameter (m) | 4.1 |
| Stack Height (m) | 94' |
| Stack Temperature (°C) | 196 |
| Flue Gas Velocity (m/s) | 5.2 |
| Flue gas flow rate (Nm ³ /hr) | 180315.6 |

| Parameter monitored | Protocol | Results(mg/Nm ³) | Standard Norms(mg/Nm ³) |
|--------------------------------------|-----------------------|------------------------------|-------------------------------------|
| SPM | IS 11255(Part 1)-1985 | 3 | 5 |
| Sulphur Dioxide (SO ₂) | IS 11255(Part 3)-1985 | 48 | 50 |
| Oxides of Nitrogen(NO _x) | IS 11255(Part 7)-2005 | 141 | 250 |
| Carbon monoxide (CO) | IS 5182(Part 10)-1999 | BDL | 100 |

Note: mg/Nm³ : milligram per normal cubic meter; SPM: Suspended Particulate Matter;
m/s – Meter per second; Nm³/hr – Normal cubic meter per hour


Inference: - STACK EMISSIONS AS ABOVE PARAMETERS ARE WITHIN STANDARDS,

Sampled by

Prepared by

Verified by

Authorized Signatory



Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax: 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT

TEST REPORT: STACK EMISSION MONITORING FOR THE MONTH OF NOVEMBER - 2017

Page No. 5 of 9

| | |
|-------------------------------|---|
| Name of the Industry | M/s ONGC Mangalore Petrochemicals Limited |
| Address of the Industry | Mangalore SEZ, Permude Village, Mangalore-574509, Karnataka, India. |
| Stack ID | CPP Utility Boiler |
| Sample Description | Manual Stack Emission Monitoring |
| Sampling Date | 13.11.2017 |
| Sampling Date | 14.11.2017 |
| Sample Receipt | Vayubodhan VSS1 |
| Equipment Used | IS 11255:1995 Methods for Measurement of Emission from Stationary Sources |
| Method of Sampling & Analysis | Hubert Enviro Care Systems (P) Ltd |
| Sample Drawn by | 01.12.2017 |
| Report Date | HECS-OMPL/SEM/005/011217 |
| Report No | |

| General Details | |
|--|----------|
| Ambient Temperature (°C) | 33 |
| Stack Diameter (m) | 2.74 |
| Stack Height (m) | 70 |
| Stack Temperature (°C) | 205 |
| Flue Gas Velocity (m/s) | 15.0 |
| Flue gas flow rate (Nm ³ /hr) | 206852.1 |

| Parameter monitored | Protocol | Results(mg/Nm ³) | Standard Norms(mg/Nm ³) |
|--------------------------------------|-----------------------|------------------------------|-------------------------------------|
| SPM | IS 11255(Part 1)-1985 | 23 | 50 |
| Sulphur Dioxide(SO ₂) | IS 11255(Part 3)-1985 | 163 | 850 |
| Oxides of Nitrogen(NO _x) | IS 11255(Part 7)-2005 | 225 | 350 |
| Carbon monoxide (CO) | IS 5182(Part 10)-1999 | BDL | 150 |

Note: mg/Nm³: milligram per normal cubic meter; SPM: Suspended Particulate Matter;
 m/s – Meter per second; Nm³/hr – Normal cubic meter per hour


Inference: - STACK EMISSIONS AS ABOVE PARAMETERS ARE WITHIN STANDARDS

Sampled by

Prepared by

Verified by

Authorized Signatory



1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples can be stored by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. In unusual circumstances lab accepts any liability or loss / damage caused by use or misuse of test report after involving or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42986555 Fax : 42986500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT

TEST REPORT: STACK EMISSION MONITORING FOR THE MONTH OF NOVEMBER - 2017

Page No. 6 of 9

| | |
|-------------------------------|---|
| Name of the Industry | M/s ONGC Mangalore Petrochemicals Limited |
| Address of the Industry | Mangalore SEZ, Permude Village, Mangalore-574509, Karnataka, India. |
| Stack ID | Tatoty Charge Heater |
| Sample Description | Manual Stack Emission Monitoring |
| Sampling Date | 15.11.2017 |
| Sample Receipt | 17.11.2017 |
| Equipment Used | Vayubodhan VSS1 |
| Method of Sampling & Analysis | IS 11255:1995-Methods for Measurement of Emission from Stationary Sources |
| Sample Drawn by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.12.2017 |
| Report No | HECS-OMPL/SEM/006/011217 |

| General Details | |
|--|---------|
| Ambient Temperature (°C) | 38 |
| Stack Diameter (m) | 1.75 |
| Stack Height (m) | 65 |
| Stack Temperature (°C) | 183 |
| Flue Gas Velocity (m/s) | 5.1 |
| Flue gas flow rate (Nm ³ /hr) | 31685.0 |

| Parameter monitored | Protocol | Results(mg/Nm ³) | Standard Norms(mg/Nm ³) |
|--------------------------------------|-----------------------|------------------------------|-------------------------------------|
| SPM | IS 11255(Part 1)-1985 | 3 | 5 |
| Sulphur Dioxide(SO ₂) | IS 11255(Part 3)-1985 | 40 | 50 |
| Oxides of Nitrogen(NO _x) | IS 11255(Part 7)-2005 | 61 | 250 |
| Carbon monoxide (CO) | IS 5182(Part 10)-1999 | 2 | 100 |

Note: mg/Nm³: milligram per normal cubic meter; SPM: Suspended Particulate Matter;
m/s – Meter per second; Nm³/hr – Normal cubic meter per hour.


Inference: - STACK EMISSIONS AS ABOVE PARAMETERS ARE WITHIN STANDARDS

Sampled by

Prepared by

Verified by

Authorized Signatory



1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not drawn by HECS unless otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss/damage caused by use or misuse of test report after invoicing or issue of test report. 5. The test results relate only to the test items. 6. # not under scope of accreditation.

Hubert Enviro Care Systems (P) Ltd.

C-46, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT

TEST REPORT: STACK EMISSION MONITORING FOR THE MONTH OF NOVEMBER - 2017

Page No. 7 of 9

| | |
|-------------------------------|---|
| Name of the Industry | M/s ONGC Mangalore Petrochemicals Limited |
| Address of the Industry | Mangalore SEZ, Permude Village, Mangalore-574509, Karnataka, India. |
| Stack ID | Xylene Column Reboiler Heater(Part A) |
| Sample Description | Manual Stack Emission Monitoring |
| Sampling Date | 14.11.2017 |
| Sample Receipt | 16.11.2017 |
| Equipment Used | Vayubodhan VSS1 |
| Method of Sampling & Analysis | IS 11255:1995 Methods for Measurement of Emission from Stationary Sources |
| Sample Drawn by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.12.2017 |
| Report No | HECS-OMPL/SEM/007/011217 |

| General Details | |
|--|----------|
| Ambient Temperature (°C) | 33 |
| Stack Diameter (m) | 3.69 |
| Stack Height (m) | 98 |
| Stack Temperature (°C) | 194 |
| Flue Gas Velocity (m/s) | 5.5 |
| Flue gas flow rate (Nm ³ /hr) | 156543.2 |

| Parameter monitored | Protocol | Results(mg/Nm ³) | Standard Norms(mg/Nm ³) |
|--------------------------------------|-----------------------|------------------------------|-------------------------------------|
| SPM | IS 11255(Part 1)-1985 | 6 | 50 |
| Sulphur Dioxide(SO ₂) | IS 11255(Part 3)-1985 | 80 | 850 |
| Oxides of Nitrogen(NO _x) | IS 11255(Part 7)-2005 | 121 | 350 |
| Carbon monoxide (CO) | IS 5182(Part 10)-1999 | BDL | 150 |

Note: mg/Nm³: milligram per normal cubic meter; SPM: Suspended Particulate Matter;
m/s – Meter per second; Nm³/hr – Normal cubic meter per hour

Inference: - STACK EMISSIONS AS ABOVE PARAMETERS ARE WITHIN STANDARDS

Sampled by

Prepared by

Verified by

Authorized Signatory
CHENNAI
600 083

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575011.
Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical
ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT

TEST REPORT: STACK EMISSION MONITORING FOR THE MONTH OF NOVEMBER - 2017

Page No. 8 of 9

| | |
|-------------------------------|---|
| Name of the Industry | M/s ONGC Mangalore Petrochemicals Limited |
| Address of the Industry | Mangalore SEZ, Permude Village, Mangalore-574509, Karnataka, India. |
| Stack ID | Xylene Column Reboiler Heater(Part B) |
| Sample Description | Manual Stack Emission Monitoring |
| Sampling Date | 14.11.2017 |
| Sample Receipt | 16.11.2017 |
| Equipment Used | Vayubodhan VSS1 |
| Method of Sampling & Analysis | IS 11255:1995 Methods for Measurement of Emission from Stationary Sources |
| Sample Drawn by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.12.2017 |
| Report No | HECS-OMPL/SEM/008/011217 |


| General Details | |
|--|--------|
| Ambient Temperature (°C) | 33 |
| Stack Diameter (m) | 3.69 |
| Stack Height (m) | 98 |
| Stack Temperature (°C) | 199 |
| Flue Gas Velocity (m/s) | 5.6 |
| Flue gas flow rate (Nm ³ /hr) | 155630 |

| Parameter monitored | Protocol | Results(mg/Nm ³) | Standard Norms(mg/Nm ³) |
|--------------------------------------|-----------------------|------------------------------|-------------------------------------|
| SPM | IS 11255(Part 1)-1985 | 7 | 50 |
| Sulphur Dioxide(SO ₂) | IS 11255(Part 3)-1985 | 92 | 850 |
| Oxides of Nitrogen(NO _x) | IS 11255(Part 7)-2005 | 131 | 350 |
| Carbon monoxide (CO) | IS 5182(Part 10)-1999 | BDL | 150 |

Note: mg/Nm³: milligram per normal cubic meter; SPM: Suspended Particulate Matter;
m/s – Meter per second; Nm³/hr – Normal cubic meter per hour

Inference: - STACK EMISSIONS AS ABOVE PARAMETERS ARE WITHIN STANDARDS


Sampled by


Prepared by


Verified by


Authorized Signatory
Enviro Care Systems (P) Ltd
CHENNAI - 600 063
99422 00003

Hubert Enviro Care Systems (P) Ltd.

C-45, Industrial Estate, Balkampady, Mangalore, Karnataka - 575041.
 Ph: 0824 - 2408111, Email: kro@hecs.in, Website: www.hecs.in
 H.O.: # 18, 92nd Street, Ashok Nagar, Chennai - 600 083.
 Ph: 42985555 Fax : 42985500 E-mail : labsales@hecs.in



Laboratory Services Division

Accredited by NABL in the fields of Chemical ISO 9001, 14001 & OHSAS 18001 Certified.

Certificate No. T-3180

TEST REPORT

TEST REPORT: STACK EMISSION MONITORING FOR THE MONTH OF NOVEMBER - 2017

Page No. 9 of 9

| | |
|-------------------------------|---|
| Name of the Industry | M/s ONGC Mangalore Petrochemicals Limited |
| Address of the Industry | Mangalore SEZ, Permude Village, Mangalore-574509, Karnataka, India. |
| Stack ID | BTF (Toluene Column Reboiler Heater) |
| Sample Description | Manual Stack Emission Monitoring |
| Sampling Date | 16.11.2017 |
| Sample Receipt | 18.11.2017 |
| Equipment Used | Vayubodhan VSS1 |
| Method of Sampling & Analysis | IS 11255:1995 Methods for Measurement of Emission from Stationary Sources |
| Sample Drawn by | Hubert Enviro Care Systems (P) Ltd |
| Report Date | 01.12.2017 |
| Report No | HECS-OMPL/SEM/009/011217 |


| General Details | |
|--|---------|
| Ambient Temperature (°C) | 33 |
| Stack Diameter (m) | 3.29 |
| Stack Height (m) | 80 |
| Stack Temperature (°C) | 170 |
| Flue Gas Velocity (m/s) | 5.4 |
| Flue gas flow rate (Nm ³ /hr) | 96106.8 |

| Parameter monitored | Protocol | Results (mg/Nm ³) | Standard Norms (mg/Nm ³) |
|--------------------------------------|-----------------------|-------------------------------|--------------------------------------|
| SPM | IS 11255(Part 1)-1985 | 6 | 50 |
| Sulphur Dioxide(SO ₂) | IS 11255(Part 3)-1985 | 51 | 850 |
| Oxides of Nitrogen(NO _x) | IS 11255(Part 7)-2005 | 72 | 350 |
| Carbon monoxide (CO) | IS 5182(Part 10)-1999 | BDL | 150 |

Note: mg/Nm³; milligram per normal cubic meter; SPM: Suspended Particulate Matter;
 m/s – Meter per second; Nm³/hr – Normal cubic meter per hour


Inference: - STACK EMISSIONS AS ABOVE PARAMETERS ARE WITHIN STANDARDS


Sampled by


Prepared by


Verified by


Authorized Signatory




1. The report in full or part shall not be used for any promotional or publicity purpose without written consent by HECS organization. 2. Samples are not owned by HECS unless or otherwise mentioned. 3. Unless specifically requested by customer the test items will not be retained more than 15 days from the date of issue of test report. 4. Under no circumstances lab accepts any liability or loss/damage caused by use or misuse of test report after invoicing or issue of test report. 5. The test results relate only to the test items. 6. Not under scope of accreditation.

SO₂ Emission from the Plant

ANNEXURE - F

| Month | SOX Load MTPD | SOX Load (EC Limit) MTPD |
|--------|---------------|--------------------------|
| Apr-17 | 3.52 | 13.68 |
| May-17 | 2.27 | 13.68 |
| Jun-17 | 3.58 | 13.68 |
| Jul-17 | 4.15 | 13.68 |
| Aug-17 | 3.29 | 13.68 |
| Sep-17 | 4.91 | 13.68 |
| Oct-17 | 3.59 | 13.68 |
| Nov-17 | 2.60 | 13.68 |

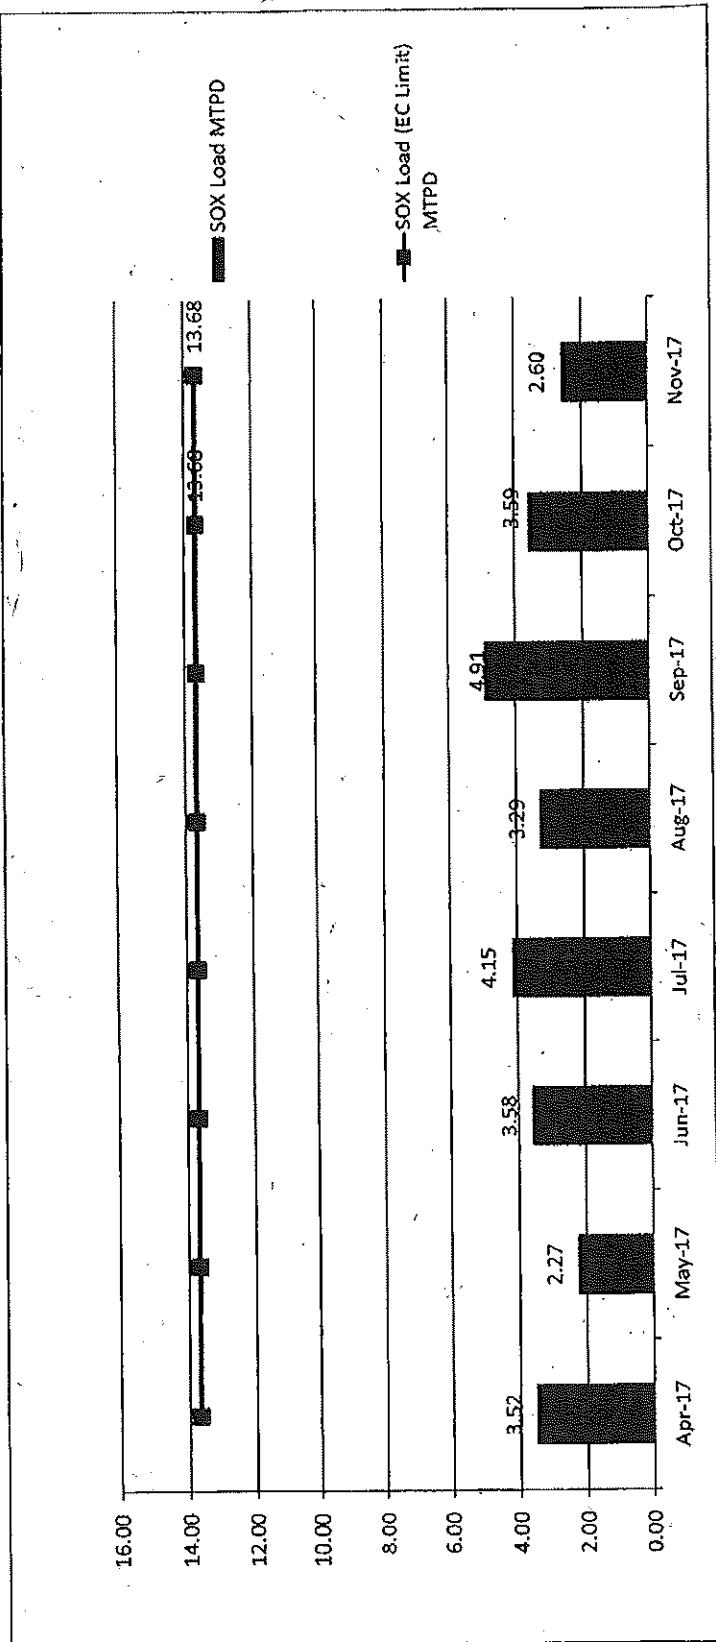

ANNEXURE - G

Form-1 (Rule 4)
Returns Regarding Water Consumed during the Month of November, 2017

| Name and address of the Consumer | Purpose for which water consumed | Reading at the beginning of the first day of the calendar month under report | Reading at the end of the last day of the calendar month under report | Quantity of Water Consumed in Kilo Liters | If the meter was out of order, the monthly average consumption of water for the previous 3 months of the working period | Quantity of water qualifying for rebate according to the assessee | Remarks |
|--|---|--|---|---|---|---|---------|
| | Industrial cooling, spraying in mine pits or Boiler feed | | | | | | |
| | Cooling Water | 0 | 83788 | 83788 | | | |
| | Boiler Feed Water | 0 | 72604 | 72604 | | | |
| M/s ONGC Mangalore Petrochemicals Limited, Mangalore Special Economic Zone, Permuide, Mangalore -574 509 | Fire Water | 0 | 34596 | 34596 | | | |
| | <u>Domestic purpose</u> | | | | | | |
| | Drinking Water & Sanitation | 0 | 4816 | 4816 | | | |
| | Processing whereby water gets polluted and the pollutants are easily bio-degradable | | | | | | |
| | Service Water | | 10405 | 10405 | Subtracting total flow from BEW , CT & Drinking water consumption. | | |
| | Total Consumption | | | 206209 | | | |

Signature of the Consumer

Vinayakarapaksh, Manager(Env)

Name

Address

M/s ONGC Mangalore Petrochemicals Limited, Mangalore Special Economic Zone, Permuide, Mangalore -574 509

ANNEXURE - 4

ONGC Mangalore Petrochemicals Limited

Production Details for November, 2017

Net Naptha Processed – 1,23,207 MT

| Sl. No. | Name of the Product | Quantity, MT |
|---------|----------------------|--------------|
| 1 | Paraxylene (Product) | 66,610 |
| 2 | Benzene (Co product) | 17,379 |

